SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7713 64-Core, Processor)

SPECspeed®2017_fp_base = 164

SPECspeed®2017_fp_peak = 167

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Aug-2021
Hardware Availability: Jun-2021
Software Availability: Jun-2021

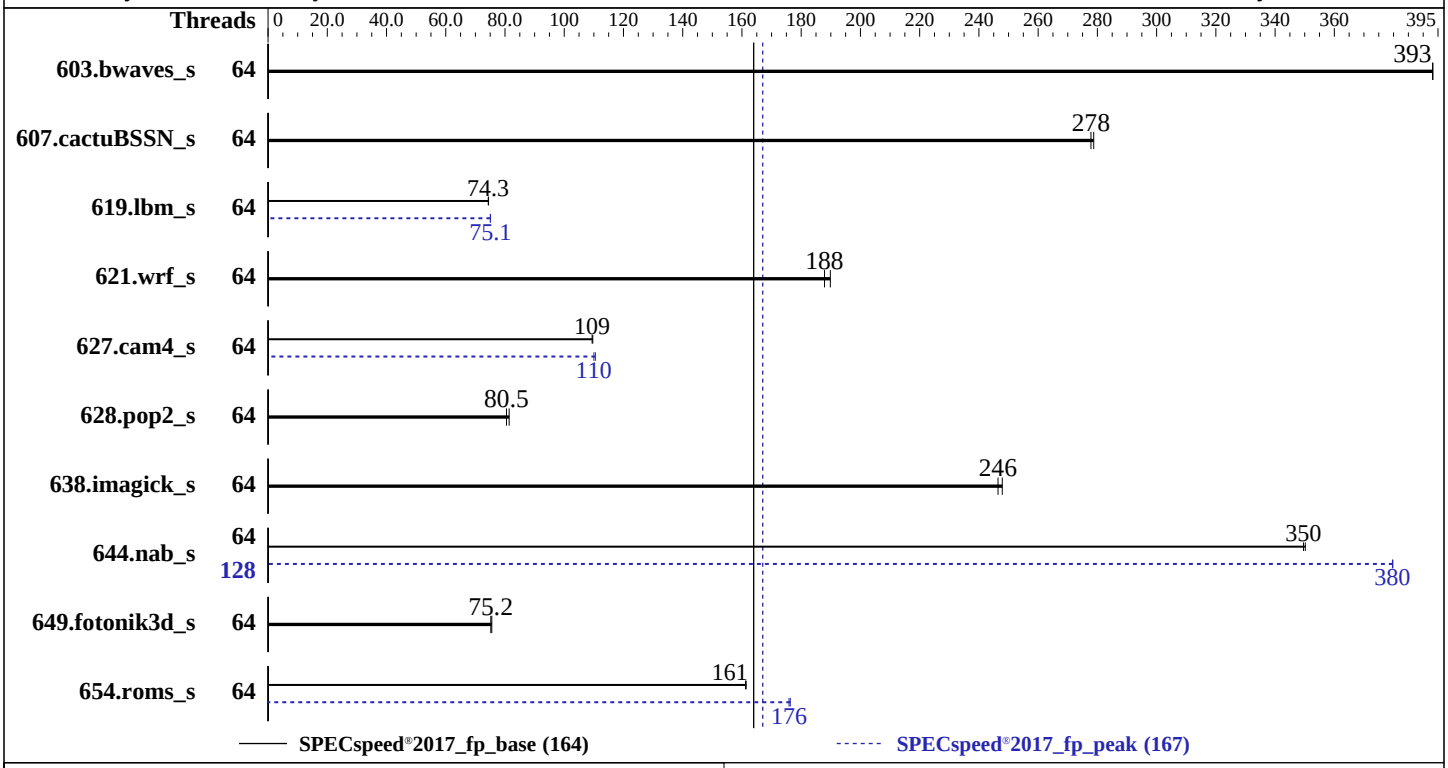

Hardware

CPU Name:	AMD EPYC 7713
Max MHz:	3675
Nominal:	2000
Enabled:	64 cores, 1 chip, 2 threads/core
Orderable:	1 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1 TB (8 x 128 GB 4Rx4 PC4-3200V-L)
Storage:	1 x 960 GB M.2 SSD SATA
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP2 (x86_64) kernel version 5.3.18-22-default
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 4.2.0.271 released Jul-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	**150**	**393**	150	393			64	**150**	**393**	150	393		
607.cactuBSSN_s	64	**60.0**	**278**	59.8	279			64	**60.0**	**278**	59.8	279		
619.lbm_s	64	70.4	74.4	**70.5**	**74.3**			64	69.8	75.1	**69.8**	**75.1**		
621.wrf_s	64	69.7	190	**70.4**	**188**			64	69.7	190	**70.4**	**188**		
627.cam4_s	64	**81.0**	**109**	80.8	110			64	80.2	111	**80.6**	**110**		
628.pop2_s	64	**147**	**80.5**	146	81.4			64	**147**	**80.5**	146	81.4		
638.imagick_s	64	58.2	248	**58.5**	**246**			64	58.2	248	**58.5**	**246**		
644.nab_s	64	**50.0**	**350**	49.9	350			128	46.0	380	**46.0**	**380**		
649.fotonik3d_s	64	121	75.5	**121**	**75.2**			64	121	75.5	**121**	**75.2**		
654.roms_s	64	97.5	161	**97.7**	**161**			64	89.3	176	**89.5**	**176**		

SPECspeed®2017_fp_base = 164

SPECspeed®2017_fp_peak = 167

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed
     _aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0 64 1 65 2 66 3 67 4 68 5 69 6 70 7 71 8 72 9 73 10 74
     11 75 12 76 13 77 14 78 15 79 16 80 17 81 18 82 19 83 20 84 21 85 22 86
     23 87 24 88 25 89 26 90 27 91 28 92 29 93 30 94 31 95 32 96 33 97 34 98
     35 99 36 100 37 101 38 102 39 103 40 104 41 105 42 106 43 107 44 108 45
     109 46 110 47 111 48 112 49 113 50 114 51 115 52 116 53 117 54 118 55
     119 56 120 57 121 58 122 59 123 60 124 61 125 62 126 63 127"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS Configuration
 SMT Mode set to Auto
 NUMA nodes per socket set to NPS2
 ACPI SRAT L3 Cache As NUMA Domain set to Enabled
 DRAM Scrub Time set to Disabled
 Determinism Slider set to Power
 cTDP Control set to Manual
 cTDP set to 280
 EDC Control set to Manual
 EDC set to 300
 L2 Stream HW Prefetcher set to Disabled
 Memory Interleaving set to Disabled
 APBDIS set to 1
 xGMI Link config set to 4

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost Wed Aug 25 20:20:23 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7713 64-Core Processor
       1  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 64
       siblings  : 128
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63

 From lscpu from util-linux 2.33.1:
```

(Continued on next page)

Platform Notes (Continued)

```
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      Address sizes:         48 bits physical, 48 bits virtual
      CPU(s):                128
      On-line CPU(s) list:   0-127
      Thread(s) per core:    2
      Core(s) per socket:    64
      Socket(s):             1
      NUMA node(s):          8
      Vendor ID:             AuthenticAMD
      CPU family:            25
      Model:                 1
      Model name:            AMD EPYC 7713 64-Core Processor
      Stepping:              1
      CPU MHz:               2631.950
      CPU max MHz:           2000.0000
      CPU min MHz:           1500.0000
      BogoMIPS:              3992.66
      Virtualization:        AMD-V
      L1d cache:             32K
      L1i cache:             32K
      L2 cache:              512K
      L3 cache:              32768K
      NUMA node0 CPU(s):     0-7,64-71
      NUMA node1 CPU(s):     8-15,72-79
      NUMA node2 CPU(s):     16-23,80-87
      NUMA node3 CPU(s):     24-31,88-95
      NUMA node4 CPU(s):     32-39,96-103
      NUMA node5 CPU(s):     40-47,104-111
      NUMA node6 CPU(s):     48-55,112-119
      NUMA node7 CPU(s):     56-63,120-127
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
     constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
     monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
     lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
     ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
     cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
     bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
     xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
     clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
     vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
     umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  /proc/cpuinfo cache data
     cache size : 512 KB
```

(Continued on next page)

Platform Notes (Continued)

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
  node 0 size: 128833 MB
  node 0 free: 128563 MB
  node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
  node 1 size: 129020 MB
  node 1 free: 128796 MB
  node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
  node 2 size: 129020 MB
  node 2 free: 128834 MB
  node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
  node 3 size: 129020 MB
  node 3 free: 128837 MB
  node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
  node 4 size: 128986 MB
  node 4 free: 128701 MB
  node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
  node 5 size: 129020 MB
  node 5 free: 128742 MB
  node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
  node 6 size: 129020 MB
  node 6 free: 128708 MB
  node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
  node 7 size: 116905 MB
  node 7 free: 116713 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  11  11  11  11  11  11  11
    1:  11  10  11  11  11  11  11  11
    2:  11  11  10  11  11  11  11  11
    3:  11  11  11  10  11  11  11  11
    4:  11  11  11  11  10  11  11  11
    5:  11  11  11  11  11  10  11  11
    6:  11  11  11  11  11  11  10  11
    7:  11  11  11  11  11  11  11  10

From /proc/meminfo
   MemTotal:       1044301192 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance
```


(Continued on next page)

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP2"
      VERSION_ID="15.2"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:
   Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, IBRS_FW, STIBP:
                                                         always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Aug 25 06:51

SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sdb2      xfs   223G  6.5G  217G   3% /

From /sys/devices/virtual/dmi/id
    Vendor:         Cisco Systems Inc
    Product:        UCSC-C225-M6S
    Serial:         WZP252408JE

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
```

(Continued on next page)

Platform Notes (Continued)

```
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200
     24x Unknown Unknown

 BIOS:
    BIOS Vendor:       Cisco Systems, Inc.
    BIOS Version:      C225M6.4.2.0.271.0716210621
    BIOS Date:         07/16/2021
    BIOS Revision:     5.22

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

638.imagick_s: basepeak = yes

644.nab_s: -m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp

(Continued on next page)

Peak Optimization Flags (Continued)

644.nab_s (continued):
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

607.cactuBSSN_s: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html`
`http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-25 23:20:22-0400.
Report generated on 2021-09-29 12:21:04 by CPU2017 PS formatter v6442.
Originally published on 2021-09-28.