SPEC CPU®2017 Integer Rate Result

Dell Inc.

PowerEdge T350 (Intel Xeon E-2334, 3.40 GHz)

SPECrate®2017_int_base = 40.3

SPECrate®2017_int_peak = 41.8

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Sep-2021
Hardware Availability: Oct-2021
Software Availability: May-2021

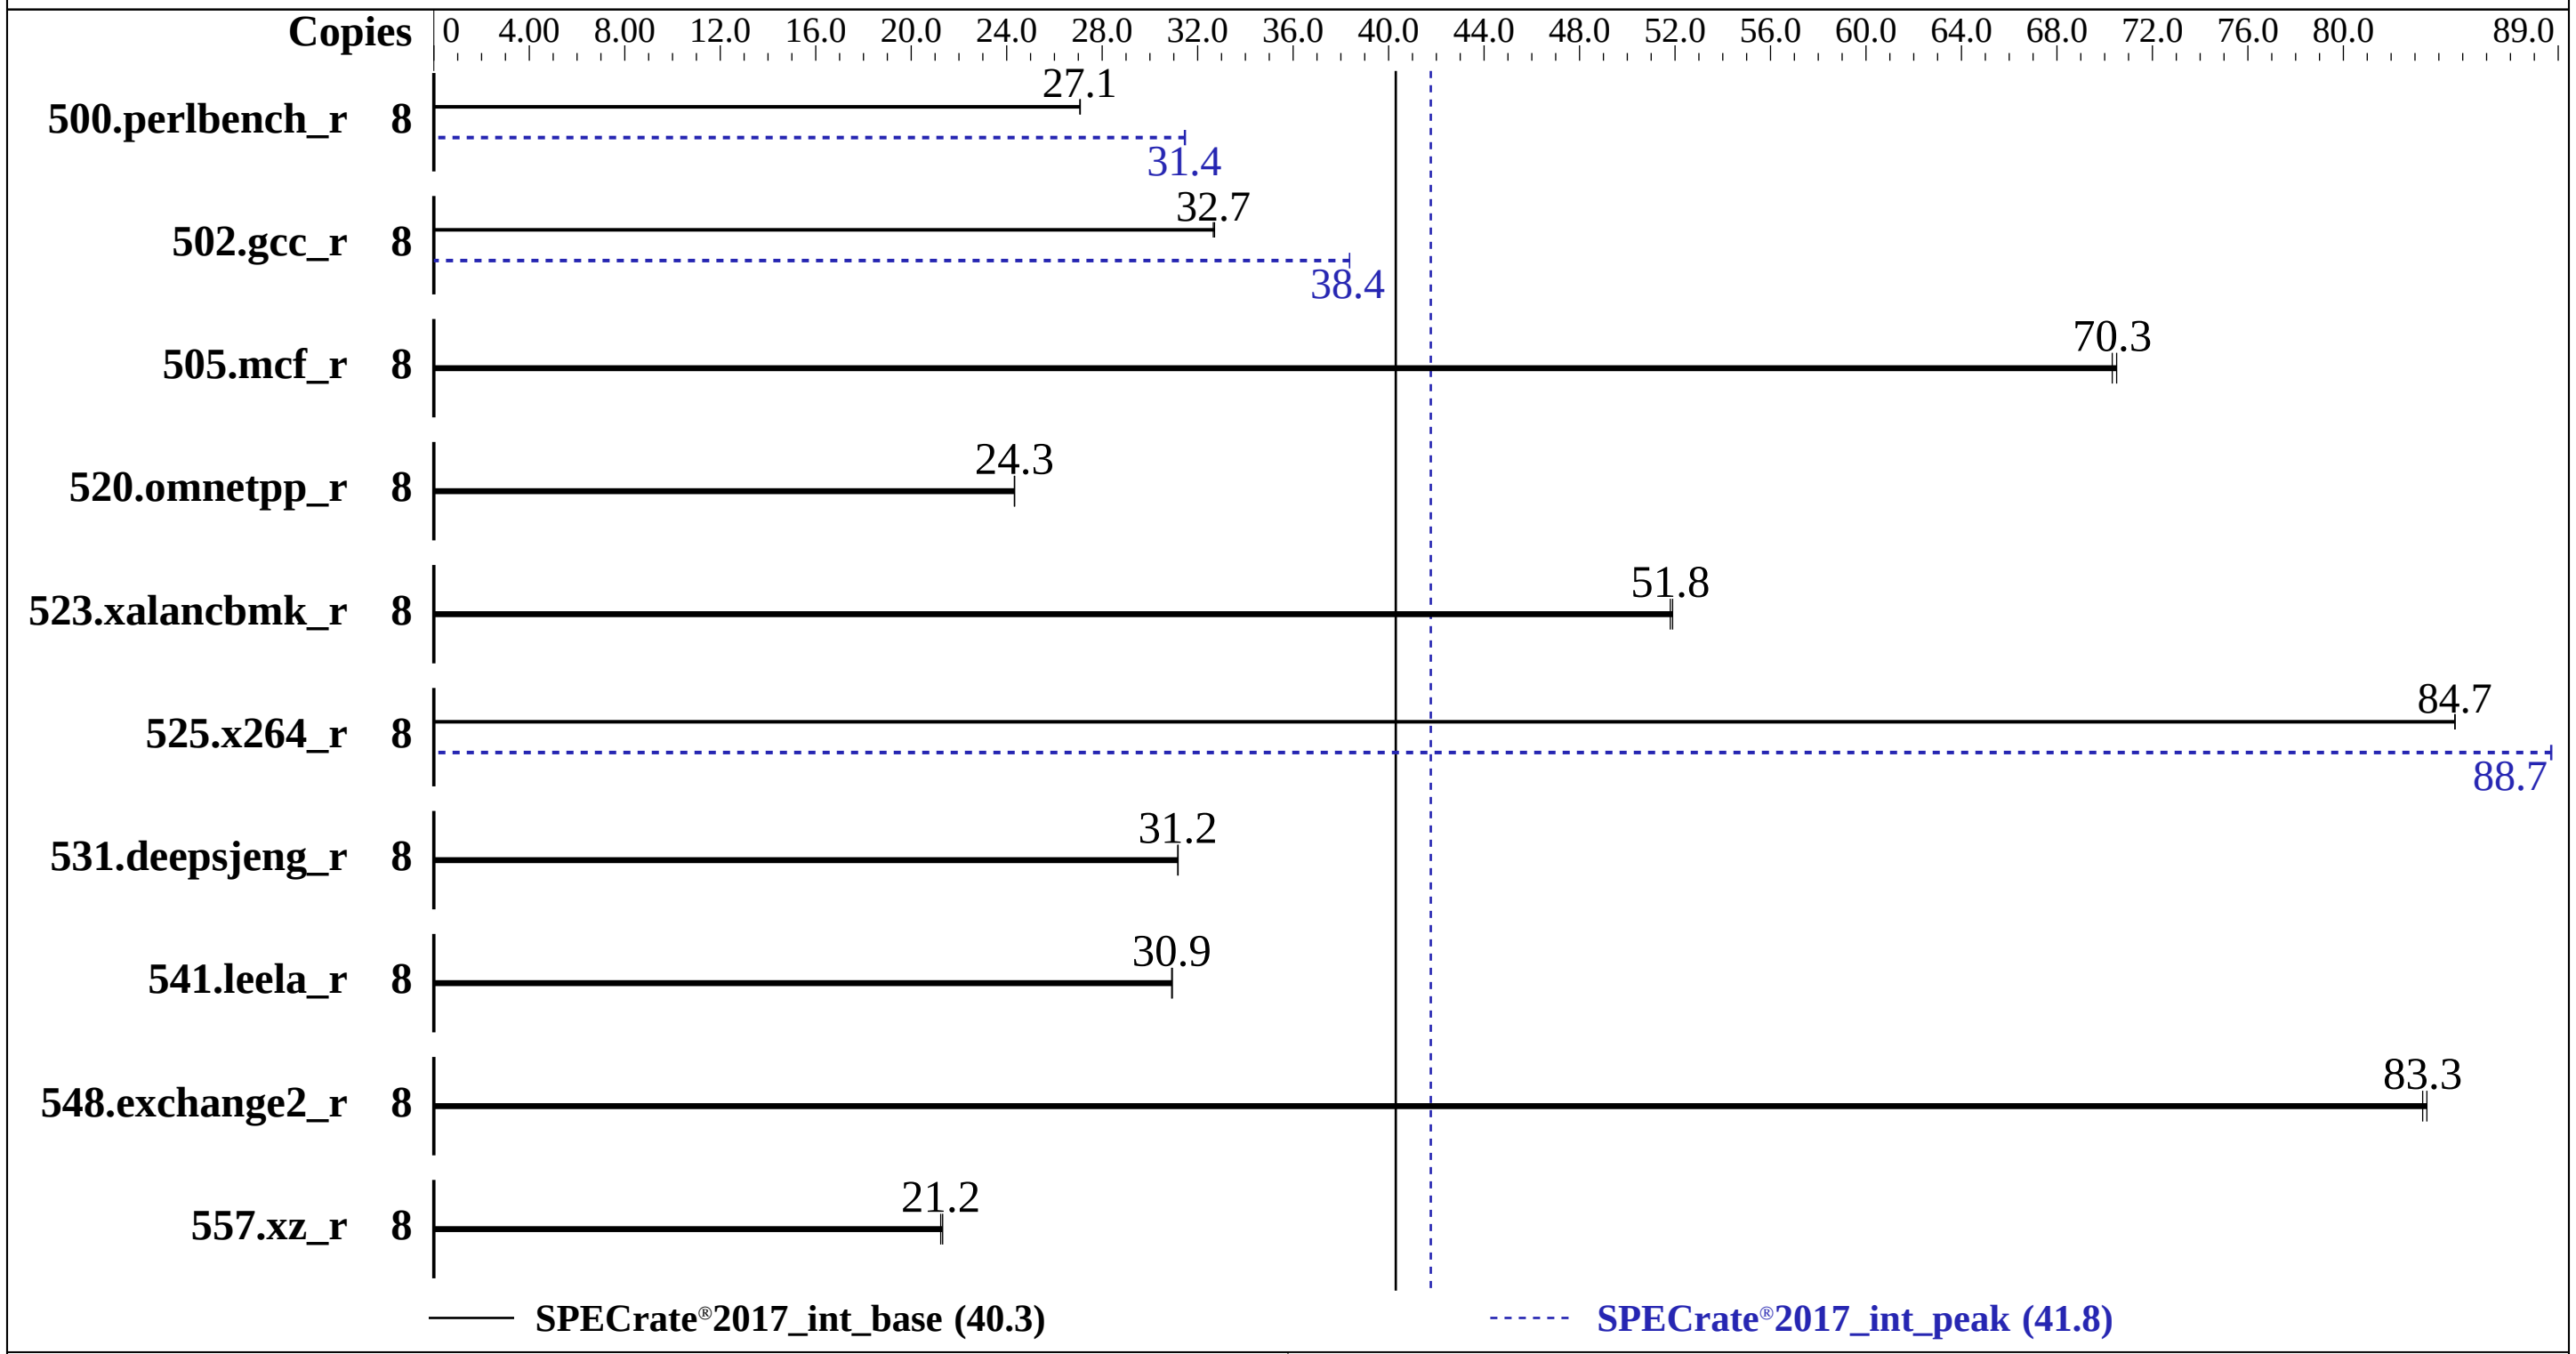

Hardware

CPU Name:	Intel Xeon E-2334
Max MHz:	4800
Nominal:	3400
Enabled:	4 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	8 MB I+D on chip per chip
Other:	None
Memory:	64 GB (2 x 32 GB 2Rx8 PC4-3200AA-E)
Storage:	70 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.4 (Ootpa) 4.18.0-305.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version 1.0.1 released Aug-2021
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base Copies	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Copies	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
500.perlbench_r	8	470	27.1	**471**	**27.1**			8	**405**	**31.4**	404	31.5		
502.gcc_r	8	346	32.7	**347**	**32.7**			8	**295**	**38.4**	295	38.4		
505.mcf_r	8	**184**	**70.3**	183	70.5			8	**184**	**70.3**	183	70.5		
520.omnetpp_r	8	**432**	**24.3**	431	24.3			8	**432**	**24.3**	431	24.3		
523.xalancbmk_r	8	163	51.9	**163**	**51.8**			8	163	51.9	**163**	**51.8**		
525.x264_r	8	165	84.7	**165**	**84.7**			8	158	88.7	**158**	**88.7**		
531.deepsjeng_r	8	**294**	**31.2**	294	31.2			8	**294**	**31.2**	294	31.2		
541.leela_r	8	**429**	**30.9**	428	30.9			8	**429**	**30.9**	428	30.9		
548.exchange2_r	8	251	83.5	**252**	**83.3**			8	251	83.5	**252**	**83.3**		
557.xz_r	8	**407**	**21.2**	405	21.3			8	**407**	**21.2**	405	21.3		

SPECrate®2017_int_base = 40.3

SPECrate®2017_int_peak = 41.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
     1.8-ic2021.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.8-ic2021.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
     Virtualization Technology : Disabled

                System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                      C States : Autonomous
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2021.1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Sun Sep  5 07:27:13 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) E-2334 CPU @ 3.40GHz
      1  "physical id"s (chips)
      8 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 4
      siblings  : 8
      physical 0: cores 0 1 2 3

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
```

(Continued on next page)

Platform Notes (Continued)

```
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              8
      On-line CPU(s) list: 0-7
      Thread(s) per core:  2
      Core(s) per socket:  4
      Socket(s):           1
      NUMA node(s):        1
      Vendor ID:           GenuineIntel
      BIOS Vendor ID:      Intel
      CPU family:          6
      Model:               167
      Model name:          Intel(R) Xeon(R) E-2334 CPU @ 3.40GHz
      BIOS Model name:     Intel(R) Xeon(R) E-2334 CPU @ 3.40GHz
      Stepping:            1
      CPU MHz:             4600.000
      BogoMIPS:            6816.00
      Virtualization:      VT-x
      L1d cache:           48K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            8192K
      NUMA node0 CPU(s):   0-7
      Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
      sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
      aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault invpcid_single ssbd
      ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
      mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel_pt avx512cd sha_ni
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi
      umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
      avx512_vpopcntdq rdpid fsrm md_clear flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 8192 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3 4 5 6 7
   node 0 size: 64029 MB
   node 0 free: 54015 MB
   node distances:
   node   0
     0:  10
```

(Continued on next page)

Platform Notes (Continued)

```
From /proc/meminfo
   MemTotal:       65566380 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.4 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.4"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
   Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                         Not affected
CVE-2018-3620 (L1 Terminal Fault):                      Not affected
Microarchitectural Data Sampling:                       Not affected
CVE-2017-5754 (Meltdown):                               Not affected
CVE-2018-3639 (Speculative Store Bypass):               Mitigation: Speculative Store
                                                        Bypass disabled via prctl and
                                                        seccomp
CVE-2017-5753 (Spectre variant 1):                      Mitigation: usercopy/swapgs
                                                        barriers and __user pointer
                                                        sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Enhanced IBRS, IBPB:
                                                        conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                Not affected

run-level 3 Sep 5 07:11

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2021.1
```

(Continued on next page)

Platform Notes (Continued)

```
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs   70G  4.4G   66G   7% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge T350
     Product Family: PowerEdge
     Serial:         B50KFF3

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     2x 00CE00000C01 M391A4G43AB1-CWE 32 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.0.1
    BIOS Date:         08/18/2021
    BIOS Revision:     1.0

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

(Continued on next page)

Base Portability Flags (Continued)

525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin -lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin -lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -mbranches-within-32B-boundaries -L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin -lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icx

500.perlbench_r: icc

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.4.xml

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-05 08:27:12-0400.
Report generated on 2021-10-07 13:22:34 by CPU2017 PS formatter v6442.
Originally published on 2021-10-06.