# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_int_base = 12.4

SPECspeed®2017_int_peak = 12.4

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Sep-2021
**Hardware Availability:** Jun-2021
**Software Availability:** Aug-2021

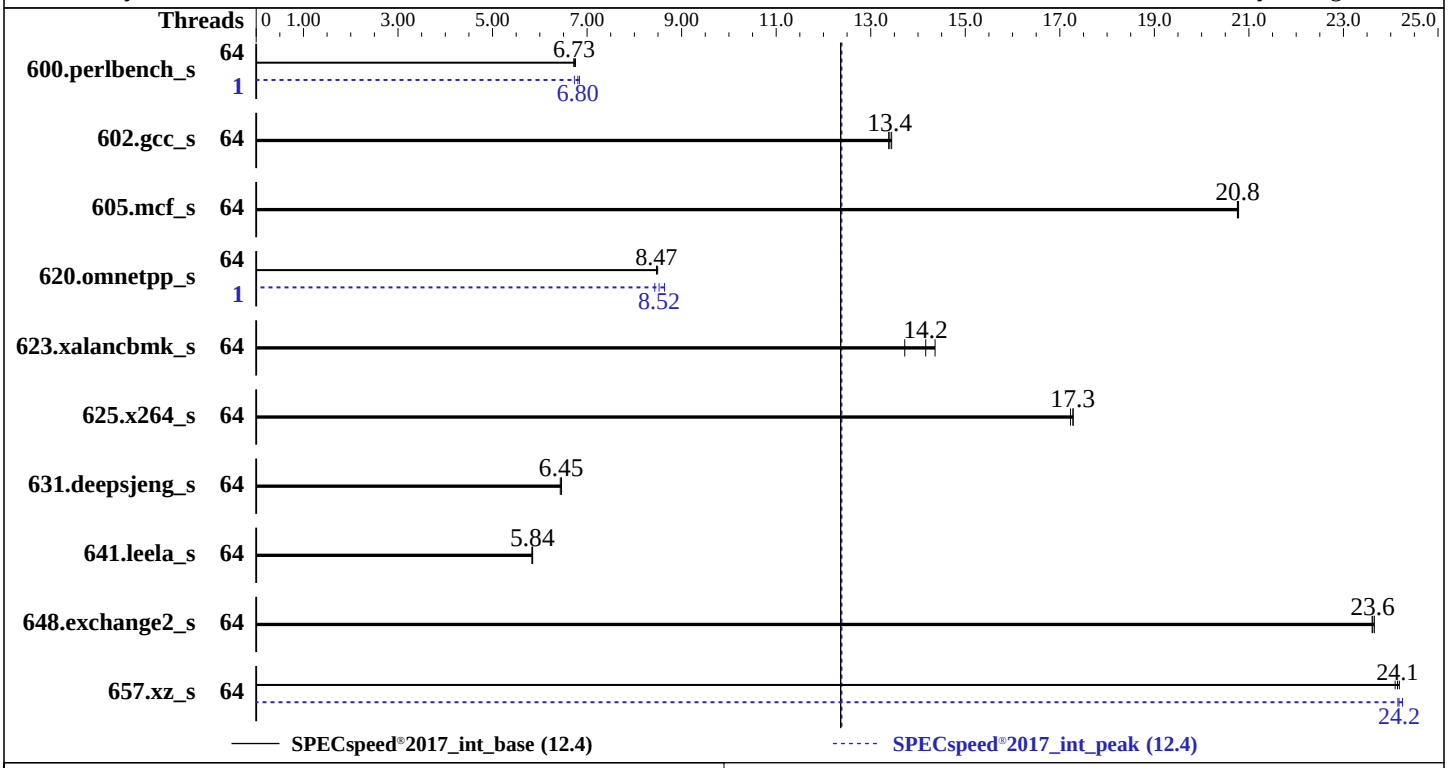


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7713P |
| Max MHz: | 3675 |
| Nominal: | 2000 |
| Enabled: | 64 cores, 1 chip |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 8 cores |
| Other: | None |
| Memory: | 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L) |
| Storage: | 1 x 480 GB SAS SSD, RAID 0 |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Ubuntu 20.04.1 LTS (x86_64)<br>Kernel 5.4.0-84-generic |
| Compiler: | C/C++/Fortran: Version 3.0.0 of AOCC |
| Parallel: | Yes |
| Firmware: | HPE BIOS Version A43 v2.52 08/24/2021 released Aug-2021 |
| File System: | ext4 |
| System State: | Run level 5 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL345 Gen10 Plus
(2.00 GHz, AMD EPYC 7713P)

SPECspeed®2017_int_base = 12.4

SPECspeed®2017_int_peak = 12.4

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Sep-2021
**Hardware Availability:** Jun-2021
**Software Availability:** Aug-2021

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 64 | 263 | 6.76 | 264 | 6.72 | **264** | **6.73** | 1 | 264 | 6.73 | **261** | **6.80** | 260 | 6.84 |
| 602.gcc_s | 64 | 296 | 13.4 | **297** | **13.4** | 298 | 13.4 | 64 | 296 | 13.4 | **297** | **13.4** | 298 | 13.4 |
| 605.mcf_s | 64 | 227 | 20.8 | 227 | 20.8 | **227** | **20.8** | 64 | 227 | 20.8 | 227 | 20.8 | **227** | **20.8** |
| 620.omnetpp_s | 64 | 192 | 8.49 | **193** | **8.47** | 193 | 8.47 | 1 | 193 | 8.43 | 189 | 8.64 | **191** | **8.52** |
| 623.xalancbmk_s | 64 | **100** | **14.2** | 103 | 13.7 | 98.7 | 14.4 | 64 | **100** | **14.2** | 103 | 13.7 | 98.7 | 14.4 |
| 625.x264_s | 64 | **102** | **17.3** | 102 | 17.2 | 102 | 17.3 | 64 | **102** | **17.3** | 102 | 17.2 | 102 | 17.3 |
| 631.deepsjeng_s | 64 | 223 | 6.43 | **222** | **6.45** | 222 | 6.46 | 64 | 223 | 6.43 | **222** | **6.45** | 222 | 6.46 |
| 641.leela_s | 64 | 293 | 5.83 | **292** | **5.84** | 292 | 5.85 | 64 | 293 | 5.83 | **292** | **5.84** | 292 | 5.85 |
| 648.exchange2_s | 64 | 124 | 23.7 | **124** | **23.6** | 125 | 23.6 | 64 | 124 | 23.7 | **124** | **23.6** | 125 | 23.6 |
| 657.xz_s | 64 | 257 | 24.1 | **256** | **24.1** | 256 | 24.2 | 64 | 255 | 24.2 | **256** | **24.2** | 256 | 24.2 |

**SPECspeed®2017_int_base = 12.4**

**SPECspeed®2017_int_peak = 12.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root to enable
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
Transparent Hugepages (THP) for this run.
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for peak
runs of 628.pop2_s and 638.imagick_s to enable THP only on request.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed
     _aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

## Platform Notes

```
BIOS Configuration
Workload Profile set to General Peak Frequency Compute
AMD SMT Option set to Disabled
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to One memory domain per socket
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
Infinity Fabric Power Management set to Disabled
Infinity Fabric Performance State set to P0
Power Regulator set to OS Control Mode

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on admin1 Wed Sep 15 07:15:20 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7713P 64-Core Processor
       1  "physical id"s (chips)
       64 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 64
       siblings  : 64
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63

 From lscpu from util-linux 2.34:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Byte Order:                      Little Endian
      Address sizes:                   48 bits physical, 48 bits virtual
      CPU(s):                          64
      On-line CPU(s) list:             0-63
      Thread(s) per core:              1
      Core(s) per socket:              64
      Socket(s):                       1
      NUMA node(s):                    8
      Vendor ID:                       AuthenticAMD
      CPU family:                      25
      Model:                           1
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Model name:                      AMD EPYC 7713P 64-Core Processor
      Stepping:                        1
      Frequency boost:                 enabled
      CPU MHz:                         1470.220
      CPU max MHz:                     2000.0000
      CPU min MHz:                     1500.0000
      BogoMIPS:                        3992.57
      Virtualization:                  AMD-V
      L1d cache:                       2 MiB
      L1i cache:                       2 MiB
      L2 cache:                        32 MiB
      L3 cache:                        256 MiB
      NUMA node0 CPU(s):               0-7
      NUMA node1 CPU(s):               8-15
      NUMA node2 CPU(s):               16-23
      NUMA node3 CPU(s):               24-31
      NUMA node4 CPU(s):               32-39
      NUMA node5 CPU(s):               40-47
      NUMA node6 CPU(s):               48-55
      NUMA node7 CPU(s):               56-63
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
      IBRS_FW, STIBP disabled, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
      xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
      clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      L1d       32K       2M    8 Data            1
      L1i       32K       2M    8 Instruction     1
      L2       512K      32M    8 Unified         2
      L3        32M     256M   16 Unified         3

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7
    node 0 size: 128776 MB
    node 0 free: 128606 MB
    node 1 cpus: 8 9 10 11 12 13 14 15
    node 1 size: 129022 MB
    node 1 free: 128880 MB
    node 2 cpus: 16 17 18 19 20 21 22 23
    node 2 size: 129022 MB
    node 2 free: 128890 MB
    node 3 cpus: 24 25 26 27 28 29 30 31
    node 3 size: 129022 MB
    node 3 free: 128895 MB
    node 4 cpus: 32 33 34 35 36 37 38 39
    node 4 size: 129022 MB
    node 4 free: 128793 MB
    node 5 cpus: 40 41 42 43 44 45 46 47
    node 5 size: 128997 MB
    node 5 free: 128745 MB
    node 6 cpus: 48 49 50 51 52 53 54 55
    node 6 size: 129022 MB
    node 6 free: 128774 MB
    node 7 cpus: 56 57 58 59 60 61 62 63
    node 7 size: 116908 MB
    node 7 free: 116763 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  11  11  11  11  11  11  11
      1:  11  10  11  11  11  11  11  11
      2:  11  11  10  11  11  11  11  11
      3:  11  11  11  10  11  11  11  11
      4:  11  11  11  11  10  11  11  11
      5:  11  11  11  11  11  10  11  11
      6:  11  11  11  11  11  11  10  11
      7:  11  11  11  11  11  11  11  10

  From /proc/meminfo
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    MemTotal:       1044267872 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     ondemand

  /usr/bin/lsb_release -d
     Ubuntu 20.04.1 LTS

  From /etc/*release* /etc/*version*
     debian_version: bullseye/sid
     os-release:
        NAME="Ubuntu"
        VERSION="20.04.1 LTS (Focal Fossa)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 20.04.1 LTS"
        VERSION_ID="20.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"

  uname -a:
     Linux admin1 5.4.0-84-generic #94-Ubuntu SMP Thu Aug 26 20:27:37 UTC 2021 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                         IBPB: conditional, IBRS_FW, STIBP:
                                                           disabled, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

  run-level 5 Sep 15 05:55

  SPEC is set to: /home/cpu2017
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    Filesystem                         Type  Size  Used Avail Use% Mounted on
    /dev/mapper/ubuntu--vg-ubuntu--lv ext4  196G   17G  170G   9% /

  From /sys/devices/virtual/dmi/id
      Vendor:         HPE
      Product:        ProLiant DL345 Gen10 Plus
      Product Family: ProLiant
      Serial:         J20APP000K

  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
  interpret this section. The 'dmidecode' program reads system data which is "intended to
  allow hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      8x Samsung M386AAG40AM3-CWE 128 GB 4 rank 3200
      8x UNKNOWN NOT AVAILABLE

  BIOS:
     BIOS Vendor:       HPE
     BIOS Version:      A43
     BIOS Date:         08/24/2021
     BIOS Revision:     2.52
     Firmware Revision: 2.55

  (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

## Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

C++ benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Fortran benchmarks:
`-Wno-return-type`

## Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

600.perlbench_s: `-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition`
`-Wl,-mllvm -Wl,-enable-licm-vrp`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -ffast-math -flto`
`-fstruct-layout=5 -mllvm -unroll-threshold=50`
`-fremap-arrays -flv-function-specialization`
`-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist`
`-mllvm -global-vectorize-slp=true`
`-mllvm -function-specialize -mllvm -enable-licm-vrp`
`-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

602.gcc_s: basepeak = yes

605.mcf_s: basepeak = yes

625.x264_s: basepeak = yes

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

## Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

**(Continued on next page)**

## Peak Other Flags (Continued)

C++ benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revQ.html
http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revQ.xml
http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-15 03:15:20-0400.
Report generated on 2021-10-12 17:17:48 by CPU2017 PS formatter v6442.
Originally published on 2021-10-12.