SPEC CPU®2017 Integer Rate Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 480 Gen10
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_int_base = 231

SPECrate®2017_int_peak = Not Run

CPU2017 License:	3	**Test Date:**	Sep-2021
Test Sponsor:	HPE	**Hardware Availability:**	Nov-2019
Tested by:	HPE	**Software Availability:**	Dec-2020

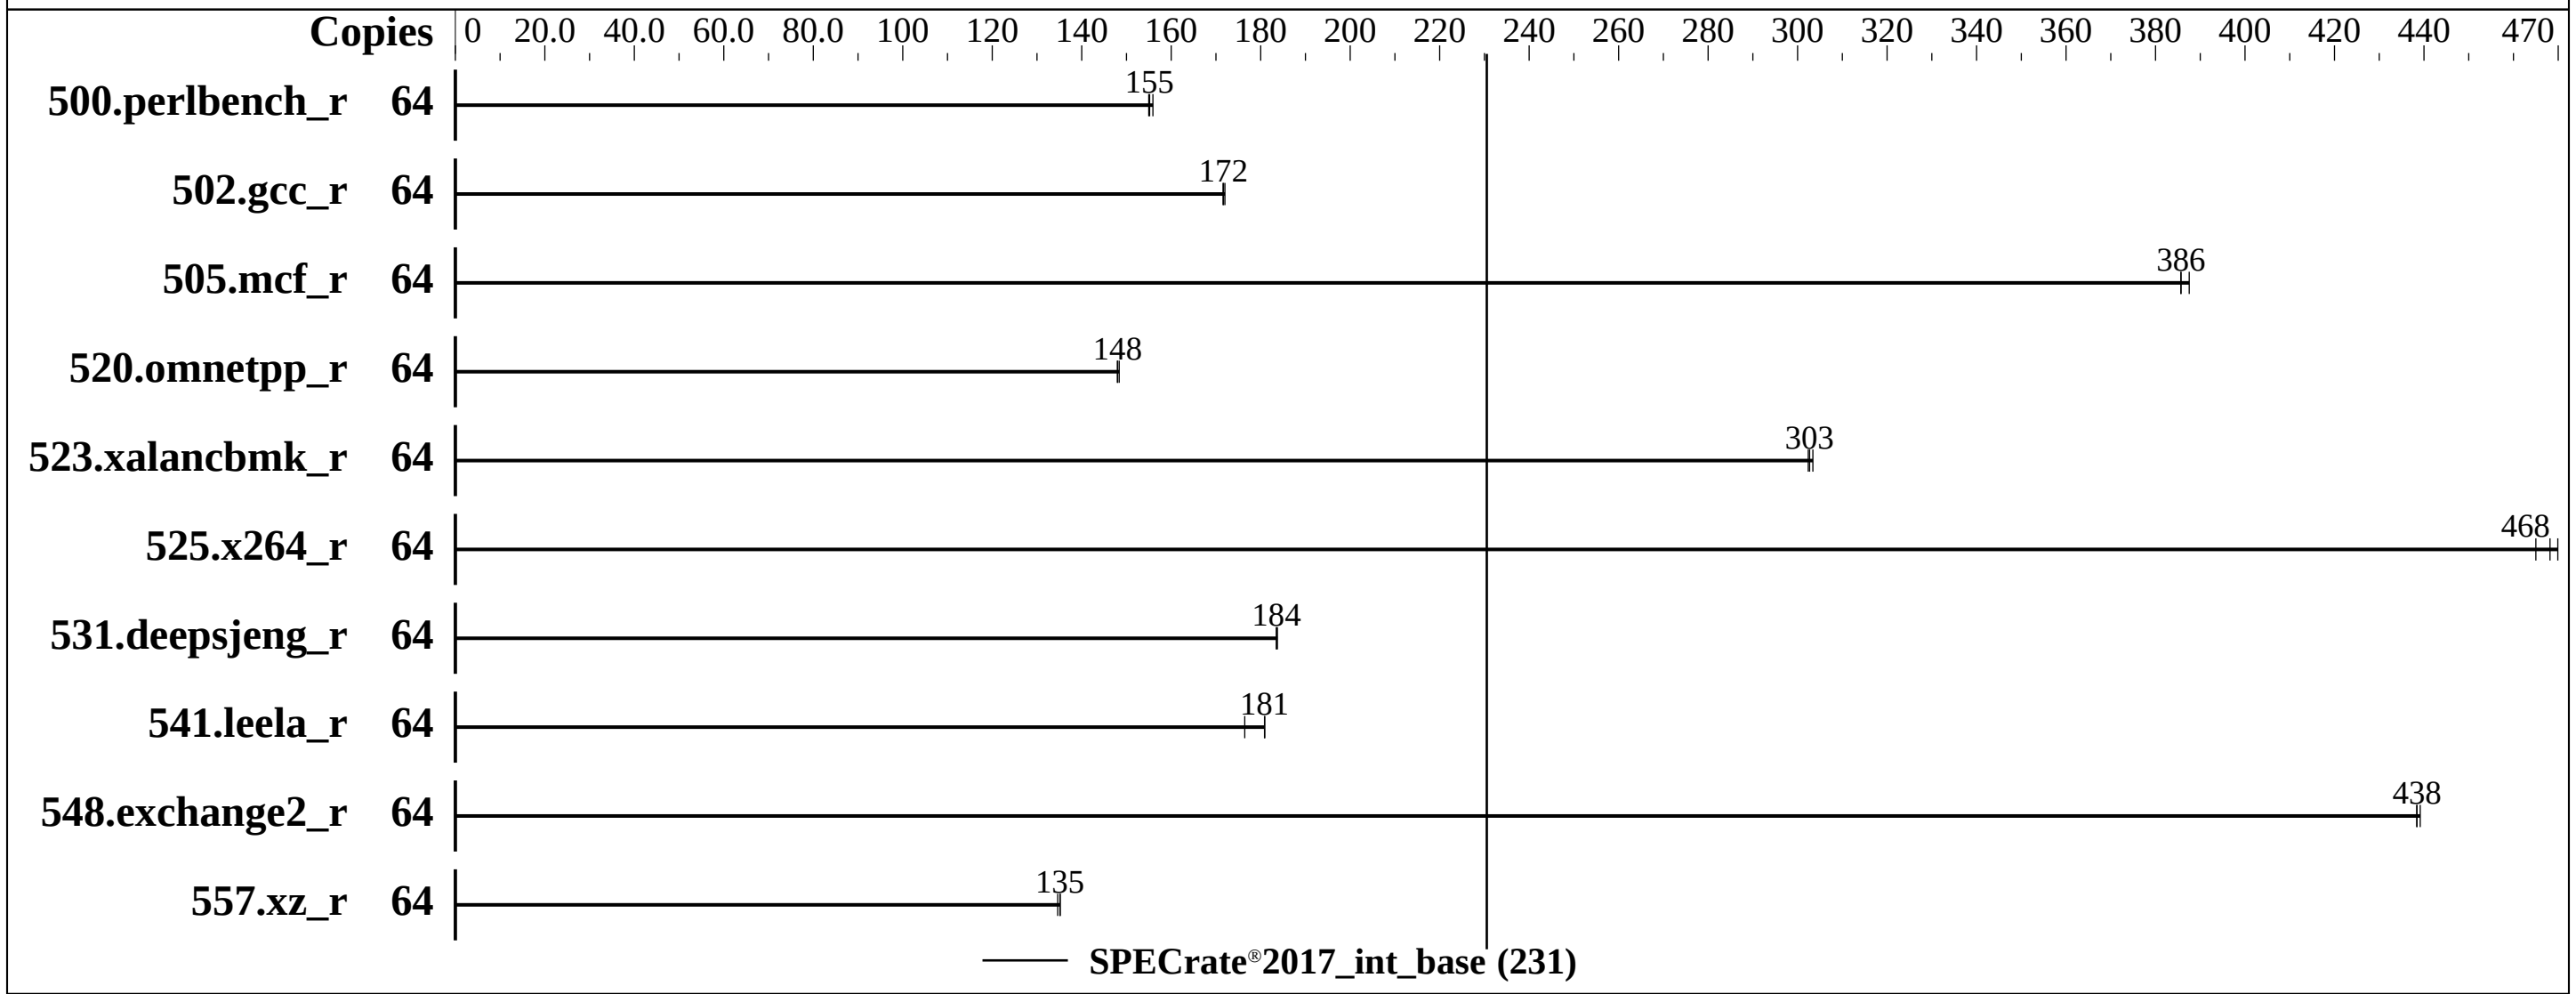

Hardware

CPU Name:	Intel Xeon Gold 6226R
Max MHz:	3900
Nominal:	2900
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	22 MB I+D on chip per chip
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
Storage:	1 x 400 GB SAS SSD, RAID 0
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.2 Kernel 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Parallel:	No
Firmware:	HPE BIOS Version I42 v2.22 11/13/2019 released Nov-2019
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)
Synergy 480 Gen10
(2.90 GHz, Intel Xeon Gold 6226R)

SPECrate®2017_int_base = 231

SPECrate®2017_int_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2021
Hardware Availability: Nov-2019
Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	**657**	**155**	654	156	657	155							
502.gcc_r	64	527	172	**528**	**172**	528	172							
505.mcf_r	64	268	386	267	388	**268**	**386**							
520.omnetpp_r	64	567	148	**567**	**148**	566	148							
523.xalancbmk_r	64	**223**	**303**	223	303	224	302							
525.x264_r	64	**239**	**468**	238	470	241	465							
531.deepsjeng_r	64	**400**	**184**	400	183	399	184							
541.leela_r	64	**586**	**181**	586	181	601	176							
548.exchange2_r	64	**382**	**438**	382	438	382	439							
557.xz_r	64	511	135	513	135	**511**	**135**							

SPECrate®2017_int_base = 231

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 >       /proc/sys/vm/drop_caches
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
     32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
```

(Continued on next page)

General Notes (Continued)

```
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

  This benchmark result is intended to provide perspective on
 past performance using the historical
 firmware described on this result page.

 The system as described on this result page was formerly
 generally available.  At the time of this publication, it may
 not be shipping, and/or may not be supported, and/or may fail
 to meet other tests of General Availability described in the
 SPEC OSG Policy document,http://www.spec.org/osg/policy.html

 This measured result may not be representative of the result
 that would be measured were this benchmark run with firmware
 available as of the publication date.
```

Platform Notes

```
BIOS Configuration:
  Workload Profile set to General Throughput Compute
  Memory Patrol Scrubbing set to Disabled
  Advanced Memory Protection set to Advanced ECC
  XPT Prefetcher set to Enabled
  Last Level Cache (LLC) Dead Line Allocation set to Disabled
  Enhanced Processor Performance set to Enabled
  Thermal Configuration set to Maximum Cooling
  Intel UPI Link Frequency set to Minimum
  Intel UPI Link Enablement set to Single Link
  D2K set to Disabled
  Workload Profile set to Custom
    DCU Stream Prefetcher set to Disabled
    Energy Efficient Turbo set to Enabled
    Adjacent Sector Prefetcher set to Disabled
    Intel UPI Link Power Management set to Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Fri Sep 24 16:09:33 2021

 SUT (System Under Test) info as seen by some common utilities.
```

(Continued on next page)

Platform Notes (Continued)

```
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
      2  "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              64
     On-line CPU(s) list: 0-63
     Thread(s) per core:  2
     Core(s) per socket:  16
     Socket(s):           2
     NUMA node(s):        4
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               85
     Model name:          Intel(R) Xeon(R) Gold 6226R CPU @ 2.90GHz
     Stepping:            7
     CPU MHz:             3597.136
     BogoMIPS:            5800.00
     Virtualization:      VT-x
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            1024K
     L3 cache:            22528K
     NUMA node0 CPU(s):   0-7,32-39
     NUMA node1 CPU(s):   8-15,40-47
     NUMA node2 CPU(s):   16-23,48-55
     NUMA node3 CPU(s):   24-31,56-63
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
     invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
```

(Continued on next page)

Platform Notes (Continued)

```
      flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
      cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
      arch_capabilities

 /proc/cpuinfo cache data
    cache size : 22528 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 4 nodes (0-3)
   node 0 cpus: 0 1 2 3 4 5 6 7 32 33 34 35 36 37 38 39
   node 0 size: 193099 MB
   node 0 free: 187783 MB
   node 1 cpus: 8 9 10 11 12 13 14 15 40 41 42 43 44 45 46 47
   node 1 size: 193532 MB
   node 1 free: 190090 MB
   node 2 cpus: 16 17 18 19 20 21 22 23 48 49 50 51 52 53 54 55
   node 2 size: 193532 MB
   node 2 free: 190269 MB
   node 3 cpus: 24 25 26 27 28 29 30 31 56 57 58 59 60 61 62 63
   node 3 size: 193531 MB
   node 3 free: 190291 MB
   node distances:
   node   0   1   2   3
     0:  10  21  31  31
     1:  21  10  31  31
     2:  31  31  10  21
     3:  31  31  21  10

 From /proc/meminfo
    MemTotal:       792264644 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sbin/tuned-adm active
     Current active profile: accelerator-performance

 From /etc/*release* /etc/*version*
    os-release:
       NAME="Red Hat Enterprise Linux"
       VERSION="8.2 (Ootpa)"
       ID="rhel"
       ID_LIKE="fedora"
       VERSION_ID="8.2"
       PLATFORM_ID="platform:el8"
```

(Continued on next page)

Platform Notes (Continued)

```
      PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
   Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
CVE-2019-11135 (TSX Asynchronous Abort):               Mitigation: Clear CPU buffers; SMT
                                                         vulnerable

run-level 3 Sep 24 14:51

SPEC is set to: /home/cpu2017
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   317G   48G  270G  16% /home

From /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        Synergy 480 Gen10
    Product Family: Synergy
    Serial:         MXQ72204FC

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    24x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933
```

(Continued on next page)

Platform Notes (Continued)

```
 BIOS:
    BIOS Vendor:       HPE
    BIOS Version:      I42
    BIOS Date:         11/13/2019
    BIOS Revision:     2.22
    Firmware Revision: 2.10

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revE.html
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.0-ICX-revE.xml
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-09-24 16:09:32-0400.
Report generated on 2021-10-28 11:33:36 by CPU2017 PS formatter v6442.
Originally published on 2021-10-26.