SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R292-4S1 (Intel Xeon Platinum 8380HL, 2.90GHz)

SPECrate®2017_fp_base = 657

SPECrate®2017_fp_peak = 695

CPU2017 License: 4872
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Oct-2021
Hardware Availability: Jul-2020
Software Availability: May-2021

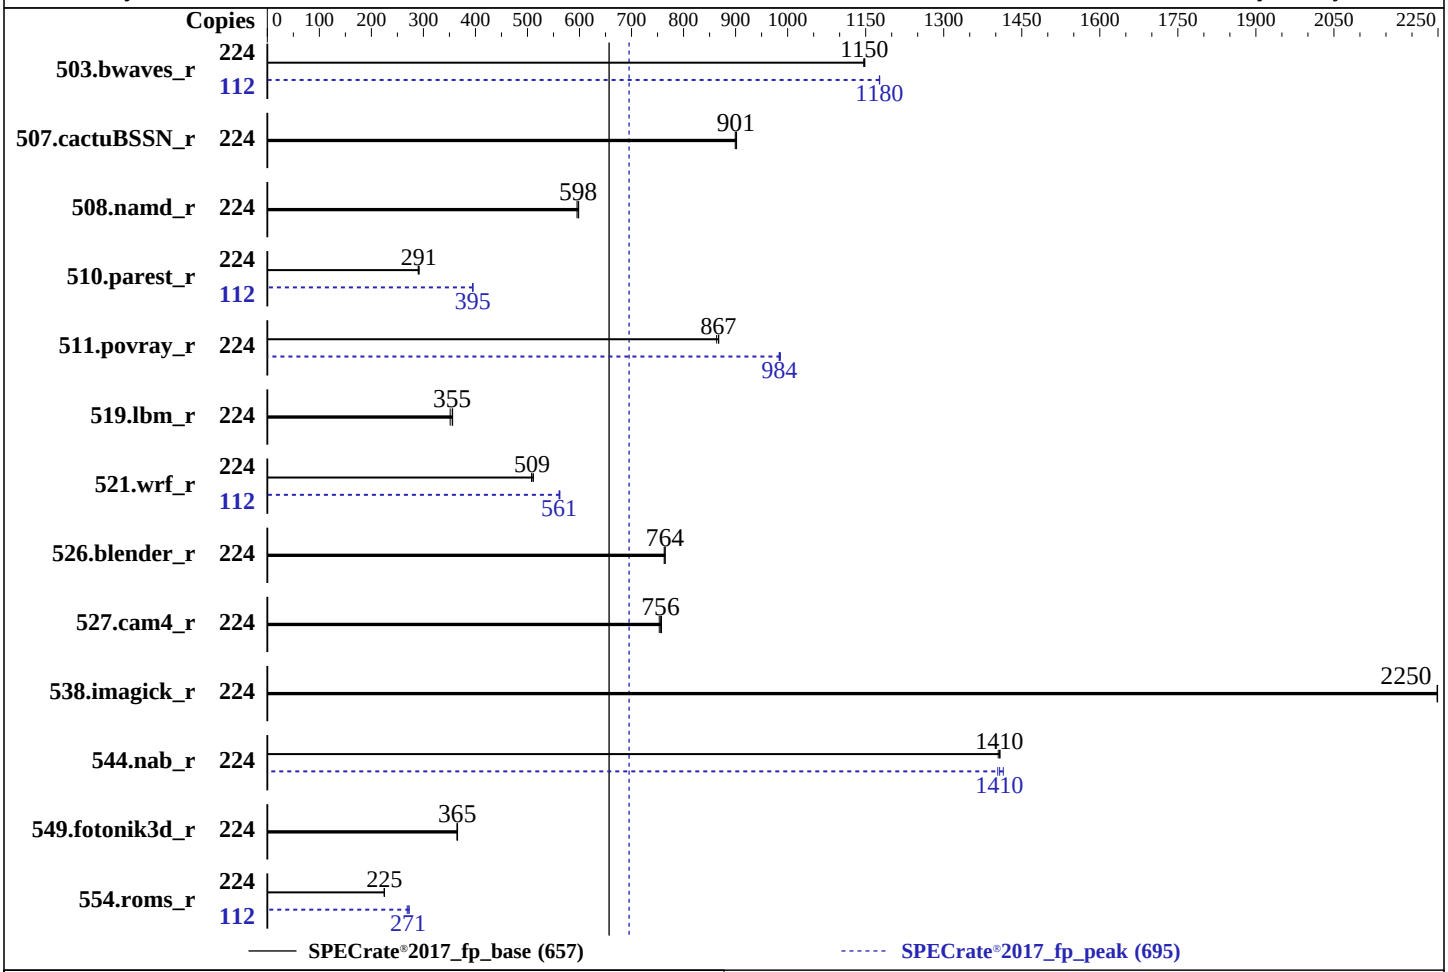

Hardware

CPU Name:	Intel Xeon Platinum 8380HL
Max MHz:	4300
Nominal:	2900
Enabled:	112 cores, 4 chips, 2 threads/core
Orderable:	4 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	38.5 MB I+D on chip per chip
Other:	None
Memory:	1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)
Storage:	1 x 1.92 TB SATA III SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version F09 released Oct-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

R292-4S1 (Intel Xeon Platinum 8380HL, 2.90GHz)

SPECrate®2017_fp_base = 657

SPECrate®2017_fp_peak = 695

CPU2017 License: 4872
Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.
Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Oct-2021
Hardware Availability: Jul-2020
Software Availability: May-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	1956	1150	**1957**	**1150**	1960	1150	112	**954**	**1180**	955	1180	954	1180
507.cactuBSSN_r	224	**315**	**901**	314	902	315	899	224	**315**	**901**	314	902	315	899
508.namd_r	224	**356**	**598**	356	598	358	595	224	**356**	**598**	356	598	358	595
510.parest_r	224	2021	290	**2013**	**291**	2009	292	112	**742**	**395**	741	395	742	395
511.povray_r	224	603	868	606	864	**603**	**867**	224	532	984	530	986	**531**	**984**
519.lbm_r	224	663	356	**664**	**355**	672	351	224	663	356	**664**	**355**	672	351
521.wrf_r	224	981	511	988	508	**986**	**509**	112	**447**	**561**	446	562	447	561
526.blender_r	224	446	765	**446**	**764**	447	763	224	446	765	**446**	**764**	447	763
527.cam4_r	224	**518**	**756**	517	758	520	753	224	**518**	**756**	517	758	520	753
538.imagick_r	224	248	2250	**248**	**2250**	248	2250	224	248	2250	**248**	**2250**	248	2250
544.nab_r	224	**268**	**1410**	268	1410	268	1400	224	**268**	**1410**	269	1400	267	1410
549.fotonik3d_r	224	2395	365	**2391**	**365**	2387	366	224	2395	365	**2391**	**365**	2387	366
554.roms_r	224	**1581**	**225**	1586	224	1580	225	112	**657**	**271**	652	273	662	269

SPECrate®2017_fp_base = 657

SPECrate®2017_fp_peak = 695

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
setterm -powersave off -blank 0
cpupower frequency-set -g performance
service irqbalance stop
echo 0 > /proc/sys/kernel/numa_balancing
echo 40 > /proc/sys/vm/dirty_ratio
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_118/lib/intel64:/home/cpu2017_118/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Policy Quick Settings set to Best Performance
DCU Streamer Prefetcher set to Disabled
SNC (Sub NUMA) set to Enabled
Stale Atos set to Enabled
LLC dead line alloc set to Disabled

Sysinfo program /home/cpu2017_118/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Wed Oct  6 23:28:49 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8380HL CPU @ 2.90GHz
      4  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 28
      siblings  : 56
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
```

(Continued on next page)

Platform Notes (Continued)

```
      28 29 30
     physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30
     physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
      28 29 30

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
      Byte Order:          Little Endian
      CPU(s):              224
      On-line CPU(s) list: 0-223
      Thread(s) per core:  2
      Core(s) per socket:  28
      Socket(s):           4
      NUMA node(s):        8
      Vendor ID:           GenuineIntel
      BIOS Vendor ID:      Intel(R) Corporation
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Platinum 8380HL CPU @ 2.90GHz
      BIOS Model name:     Intel(R) Xeon(R) Platinum 8380HL CPU @ 2.90GHz
      Stepping:            11
      CPU MHz:             3799.952
      CPU max MHz:         4300.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            5800.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            39424K
      NUMA node0 CPU(s):   0-3,7-9,14-17,21-23,112-115,119-121,126-129,133-135
      NUMA node1 CPU(s):   4-6,10-13,18-20,24-27,116-118,122-125,130-132,136-139
      NUMA node2 CPU(s):   28-31,35-37,42-45,49-51,140-143,147-149,154-157,161-163
      NUMA node3 CPU(s):   32-34,38-41,46-48,52-55,144-146,150-153,158-160,164-167
      NUMA node4 CPU(s):   56-59,63-65,70-73,77-79,168-171,175-177,182-185,189-191
      NUMA node5 CPU(s):   60-62,66-69,74-76,80-83,172-174,178-181,186-188,192-195
      NUMA node6 CPU(s):   84-87,91-93,98-101,105-107,196-199,203-205,210-213,217-219
      NUMA node7 CPU(s):   88-90,94-97,102-104,108-111,200-202,206-209,214-216,220-223
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
     pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
     rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single
     intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
```

(Continued on next page)

Platform Notes (Continued)

```
      vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm mpx rdt_a
      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      avx512_bf16 dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku ospke
      avx512_vnni md_clear flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 39424 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 112 113 114 115 119 120 121 126 127 128
   129 133 134 135
   node 0 size: 192077 MB
   node 0 free: 177356 MB
   node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 116 117 118 122 123 124 125 130 131
   132 136 137 138 139
   node 1 size: 193529 MB
   node 1 free: 182927 MB
   node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 140 141 142 143 147 148 149 154
   155 156 157 161 162 163
   node 2 size: 193529 MB
   node 2 free: 182859 MB
   node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 144 145 146 150 151 152 153 158
   159 160 164 165 166 167
   node 3 size: 193492 MB
   node 3 free: 182875 MB
   node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 168 169 170 171 175 176 177 182
   183 184 185 189 190 191
   node 4 size: 193529 MB
   node 4 free: 182869 MB
   node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 172 173 174 178 179 180 181 186
   187 188 192 193 194 195
   node 5 size: 193529 MB
   node 5 free: 182156 MB
   node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 196 197 198 199 203 204 205
   210 211 212 213 217 218 219
   node 6 size: 193529 MB
   node 6 free: 182886 MB
   node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 200 201 202 206 207 208
   209 214 215 216 220 221 222 223
   node 7 size: 193527 MB
   node 7 free: 182872 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  20  20  20  20  20  20
```

(Continued on next page)

Platform Notes (Continued)

```
     1:  11  10  20  20  20  20  20  20
     2:  20  20  10  11  20  20  20  20
     3:  20  20  11  10  20  20  20  20
     4:  20  20  20  20  10  11  20  20
     5:  20  20  20  20  11  10  20  20
     6:  20  20  20  20  20  20  10  11
     7:  20  20  20  20  20  20  11  10

  From /proc/meminfo
     MemTotal:       1583868732 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="8.4 (Ootpa)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="8.4"
        PLATFORM_ID="platform:el8"
        PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
        ANSI_COLOR="0;31"
     redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
     system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

  uname -a:
     Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
     x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                    Not affected
  CVE-2018-3620 (L1 Terminal Fault):                 Not affected
  Microarchitectural Data Sampling:                  Not affected
  CVE-2017-5754 (Meltdown):                          Not affected
  CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                     Bypass disabled via prctl and
                                                     seccomp
  CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
```

(Continued on next page)

Platform Notes (Continued)

```
                                                  barriers and __user pointer
                                                  sanitization
 CVE-2017-5715 (Spectre variant 2):               Mitigation: Enhanced IBRS, IBPB:
                                                  conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):         Not affected

 run-level 3 Oct 6 15:42

 SPEC is set to: /home/cpu2017_118
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.7T  218G  1.5T  13% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         GIGABYTE
     Product:        R292-4S0-00
     Product Family: Server
     Serial:         GKGAP5812A0001

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     48x Micron 18ASF4G72PDZ-3G2B2 32 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       GIGABYTE
    BIOS Version:      F09
    BIOS Date:         10/04/2021
    BIOS Revision:     5.19

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -no-prec-div -qopt-prefetch -ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles -mbranches-within-32B-boundaries -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifort`

Benchmarks using both Fortran and C:

521.wrf_r: `ifort icc`

527.cam4_r: `ifort icx`

Benchmarks using both C and C++:

511.povray_r: `icpc icc`

526.blender_r: `icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifort`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

549.fotonik3d_r: basepeak = yes

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries

(Continued on next page)

Peak Optimization Flags (Continued)

521.wrf_r (continued):
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-CPX-rev1.4.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-CPX-rev1.4.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-06 11:28:48-0400.
Report generated on 2021-10-28 11:34:26 by CPU2017 PS formatter v6442.
Originally published on 2021-10-26.