# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2124BT-HNTR
(H12DST-B , AMD EPYC 7702)

SPECspeed®2017_fp_base = 199

SPECspeed®2017_fp_peak = 208

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** Oct-2021
**Hardware Availability:** Aug-2019
**Software Availability:** Sep-2021

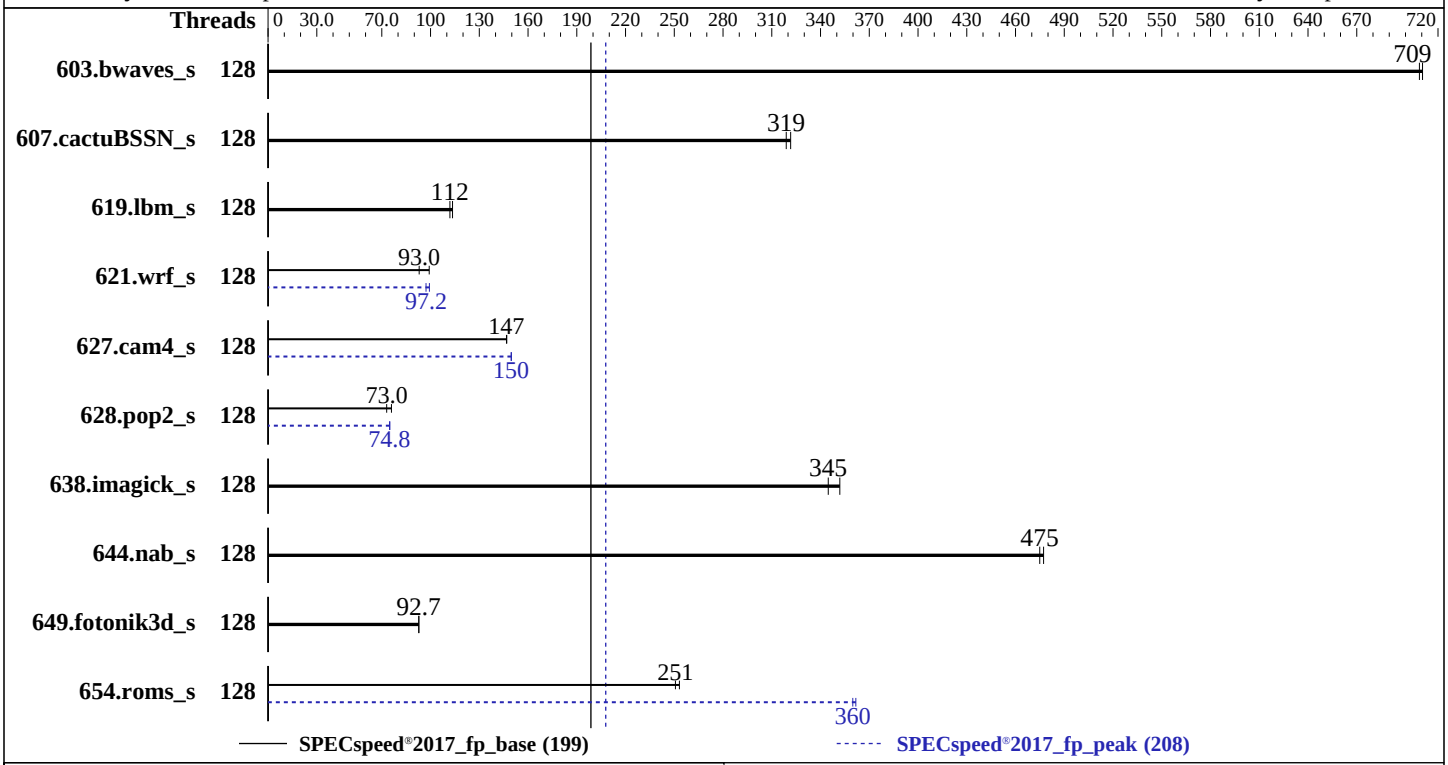


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 7702 |
| Max MHz: | 3350 |
| Nominal: | 2000 |
| Enabled: | 128 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 16 MB shared / 4 cores |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R) |
| Storage: | 1 x 200 GB SATA III SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Ubuntu 20.04.3 LTS<br>Kernel 5.4.0-88-generic |
| Compiler: | C/C++/Fortran: Version 3.0.0 of AOCC |
| Parallel: | Yes |
| Firmware: | Version 2.2 released Aug-2021 |
| File System: | ext4 |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc: jemalloc memory allocator library v5.1.0 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 128 | 83.0 | 710 | **83.3** | **709** | | | 128 | 83.0 | 710 | **83.3** | **709** | | |
| 607.cactuBSSN_s | 128 | 51.8 | 322 | **52.3** | **319** | | | 128 | 51.8 | 322 | **52.3** | **319** | | |
| 619.lbm_s | 128 | 46.1 | 114 | **46.8** | **112** | | | 128 | 46.1 | 114 | **46.8** | **112** | | |
| 621.wrf_s | 128 | **142** | **93.0** | 133 | 99.2 | | | 128 | 133 | 99.3 | **136** | **97.2** | | |
| 627.cam4_s | 128 | **60.4** | **147** | 60.3 | 147 | | | 128 | 59.2 | 150 | **59.3** | **150** | | |
| 628.pop2_s | 128 | **163** | **73.0** | 156 | 75.9 | | | 128 | **159** | **74.8** | 158 | 75.0 | | |
| 638.imagick_s | 128 | **41.8** | **345** | 41.0 | 352 | | | 128 | **41.8** | **345** | 41.0 | 352 | | |
| 644.nab_s | 128 | 36.6 | 477 | **36.8** | **475** | | | 128 | 36.6 | 477 | **36.8** | **475** | | |
| 649.fotonik3d_s | 128 | **98.3** | **92.7** | 98.2 | 92.8 | | | 128 | **98.3** | **92.7** | 98.2 | 92.8 | | |
| 654.roms_s | 128 | 62.2 | 253 | **62.8** | **251** | | | 128 | 43.5 | 362 | **43.8** | **360** | | |

**SPECspeed®2017_fp_base = 199**

**SPECspeed®2017_fp_peak = 208**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s, and 638.imagick_s,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 644.nab_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed
     _aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-127"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
```

**(Continued on next page)**

## General Notes (Continued)

```
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

## Platform Notes

```
BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 200
Package Power Limit Control = Manual
Package Power Limit = 200
APBDIS = 1
NUMA Nodes Per Socket = NPS4

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on h12dst-7702 Mon Oct  4 15:17:26 2021

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7702 64-Core Processor
       2  "physical id"s (chips)
       256 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 64
       siblings  : 128
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63

 From lscpu from util-linux 2.34:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Byte Order:                      Little Endian
      Address sizes:                   43 bits physical, 48 bits virtual
      CPU(s):                          256
      On-line CPU(s) list:             0-255
```

**(Continued on next page)**

## Platform Notes (Continued)

```
Thread(s) per core:                2
Core(s) per socket:                64
Socket(s):                         2
NUMA node(s):                      4
Vendor ID:                         AuthenticAMD
CPU family:                        23
Model:                             49
Model name:                        AMD EPYC 7702 64-Core Processor
Stepping:                          0
Frequency boost:                   enabled
CPU MHz:                           3346.533
CPU max MHz:                       2000.0000
CPU min MHz:                       1500.0000
BogoMIPS:                          3999.87
Virtualization:                    AMD-V
L1d cache:                         4 MiB
L1i cache:                         4 MiB
L2 cache:                          64 MiB
L3 cache:                          512 MiB
NUMA node0 CPU(s):                 0-31,128-159
NUMA node1 CPU(s):                 32-63,160-191
NUMA node2 CPU(s):                 64-95,192-223
NUMA node3 CPU(s):                 96-127,224-255
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2:         Mitigation; Full AMD retpoline, IBPB conditional,
IBRS_FW, STIBP conditional, RSB filling
Vulnerability Srbds:               Not affected
Vulnerability Tsx async abort:     Not affected
Flags:                             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt
aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb
stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save
tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

**(Continued on next page)**

## Platform Notes (Continued)

```
From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL
     L1d       32K       4M    8 Data            1
     L1i       32K       4M    8 Instruction     1
     L2       512K      64M    8 Unified         2
     L3        16M     512M   16 Unified         3

/proc/cpuinfo cache data
   cache size : 512 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  28 29 30 31 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146
  147 148 149 150 151 152 153 154 155 156 157 158 159
  node 0 size: 257881 MB
  node 0 free: 256529 MB
  node 1 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
  57 58 59 60 61 62 63 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175
  176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191
  node 1 size: 258019 MB
  node 1 free: 257079 MB
  node 2 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
  89 90 91 92 93 94 95 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207
  208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223
  node 2 size: 258031 MB
  node 2 free: 257219 MB
  node 3 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114
  115 116 117 118 119 120 121 122 123 124 125 126 127 224 225 226 227 228 229 230 231 232
  233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254
  255
  node 3 size: 258029 MB
  node 3 free: 256882 MB
  node distances:
  node   0   1   2   3
    0:  10  12  32  32
    1:  12  10  32  32
    2:  32  32  10  12
    3:  32  32  12  10

From /proc/meminfo
   MemTotal:       1056729836 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB
```


**(Continued on next page)**

## Platform Notes (Continued)

```
 /sbin/tuned-adm active
     Current active profile: throughput-performance

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    performance

 /usr/bin/lsb_release -d
    Ubuntu 20.04.3 LTS

 From /etc/*release* /etc/*version*
    debian_version: bullseye/sid
    os-release:
       NAME="Ubuntu"
       VERSION="20.04.3 LTS (Focal Fossa)"
       ID=ubuntu
       ID_LIKE=debian
       PRETTY_NAME="Ubuntu 20.04.3 LTS"
       VERSION_ID="20.04"
       HOME_URL="https://www.ubuntu.com/"
       SUPPORT_URL="https://help.ubuntu.com/"

 uname -a:
    Linux h12dst-7702 5.4.0-88-generic #99-Ubuntu SMP Thu Sep 23 17:29:00 UTC 2021 x86_64
    x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):                       Not affected
 Microarchitectural Data Sampling:                        Not affected
 CVE-2017-5754 (Meltdown):                                Not affected
 CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                          Bypass disabled via prctl and
                                                          seccomp
 CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                          barriers and __user pointer
                                                          sanitization
 CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                        IBPB: conditional, IBRS_FW, STIBP:
                                                          conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

 run-level 3 Oct 4 15:13

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    /dev/sda3      ext4  178G   18G  152G  11% /

 From /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        Super Server
     Serial:         0123456789

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x SK Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      2.2
    BIOS Date:         08/31/2021
    BIOS Revision:     5.14

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Fortran benchmarks:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop

**(Continued on next page)**

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

Benchmarks using both Fortran and C:
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti

Benchmarks using Fortran, C, and C++:
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti

## Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

**(Continued on next page)**

## Base Other Flags (Continued)

Fortran benchmarks:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

## Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

Fortran benchmarks:

603.bwaves_s: `basepeak = yes`

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `-m64 -mno-adx -mno-sse4a`
`-Wl,-mllvm -Wl,-enable-X86-prefetching`
`-Wl,-mllvm -Wl,-enable-licm-vrp`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive`
`-mllvm -reduce-array-computations=3`
`-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp`
`-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm`
`-ljemalloc -lflang`

Benchmarks using both Fortran and C:

621.wrf_s: `-m64 -mno-adx -mno-sse4a`
`-Wl,-mllvm -Wl,-enable-X86-prefetching`
`-Wl,-mllvm -Wl,-enable-licm-vrp`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -ffast-math -flto`
`-fstruct-layout=5 -mllvm -unroll-threshold=50`
`-fremap-arrays -flv-function-specialization`
`-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist`
`-mllvm -global-vectorize-slp=true`
`-mllvm -function-specialize -mllvm -enable-licm-vrp`
`-mllvm -reduce-array-computations=3 -Hz,1,0x1 -O3`
`-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops`
`-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop`
`-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm`
`-ljemalloc -lflang`

627.cam4_s: `-m64 -mno-adx -mno-sse4a`
`-Wl,-mllvm -Wl,-enable-X86-prefetching`
`-Wl,-mllvm -Wl,-enable-licm-vrp`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -ffast-math -flto`
`-fstruct-layout=5 -mllvm -unroll-threshold=50`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

627.cam4_s (continued):
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

628.pop2_s: Same as 627.cam4_s

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

## Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Rome-revC.xml


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-10-04 11:17:25-0400.
Report generated on 2021-10-28 11:35:52 by CPU2017 PS formatter v6442.
Originally published on 2021-10-26.