



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

**SPECspeed®2017\_fp\_base = 43.1**

**SPECspeed®2017\_fp\_peak = 44.0**

CPU2017 License: 001176


Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

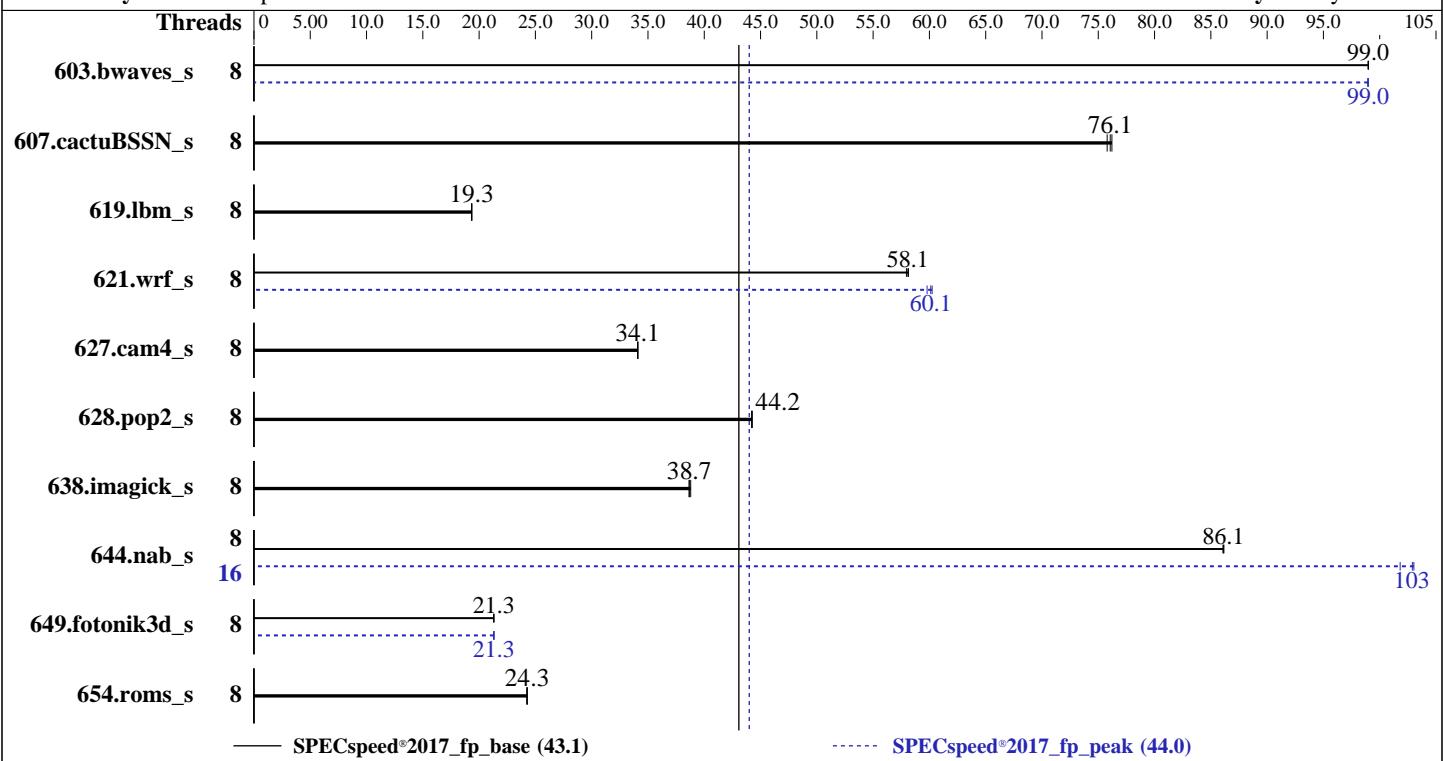

### Hardware

CPU Name: Intel Xeon E-2378G  
Max MHz: 5100  
Nominal: 2800  
Enabled: 8 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 16 MB I+D on chip per chip  
Other: None  
Memory: 128 GB (4 x 32 GB 2Rx8 PC4-3200AA-E, running at 2933)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4  
Compiler: Kernel 4.18.0-305.el8.x86\_64  
C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
Parallel: Yes  
Firmware: Version 1.0 released Aug-2021  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F, Intel Xeon E-2378G)

**SPECspeed®2017\_fp\_base = 43.1**

**SPECspeed®2017\_fp\_peak = 44.0**

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	8	596	99.0	<b>596</b>	<b>99.0</b>	596	99.0	8	596	99.0	596	99.0	<b>596</b>	<b>99.0</b>
607.cactuBSSN_s	8	<b>219</b>	<b>76.1</b>	219	76.2	220	75.8	8	<b>219</b>	<b>76.1</b>	219	76.2	220	75.8
619.lbm_s	8	271	19.3	<b>271</b>	<b>19.3</b>	271	19.3	8	271	19.3	<b>271</b>	<b>19.3</b>	271	19.3
621.wrf_s	8	<b>228</b>	<b>58.1</b>	228	58.1	228	58.0	8	221	59.8	<b>220</b>	<b>60.1</b>	220	60.2
627.cam4_s	8	260	34.1	260	34.1	<b>260</b>	<b>34.1</b>	8	260	34.1	260	34.1	<b>260</b>	<b>34.1</b>
628.pop2_s	8	<b>268</b>	<b>44.2</b>	269	44.2	268	44.3	8	<b>268</b>	<b>44.2</b>	269	44.2	268	44.3
638.imagick_s	8	<b>373</b>	<b>38.7</b>	373	38.7	372	38.8	8	<b>373</b>	<b>38.7</b>	373	38.7	372	38.8
644.nab_s	8	203	86.1	203	86.2	<b>203</b>	<b>86.1</b>	16	170	103	<b>170</b>	<b>103</b>	172	102
649.fotonik3d_s	8	428	21.3	428	21.3	<b>428</b>	<b>21.3</b>	8	<b>428</b>	<b>21.3</b>	428	21.3	428	21.3
654.roms_s	8	650	24.2	649	24.3	<b>649</b>	<b>24.3</b>	8	650	24.2	649	24.3	<b>649</b>	<b>24.3</b>
SPECspeed®2017_fp_base = <b>43.1</b>														
SPECspeed®2017_fp_peak = <b>44.0</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

SPECspeed®2017\_fp\_base = 43.1

SPECspeed®2017\_fp\_peak = 44.0

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on 135-170-143.engtw Tue Nov 2 19:45:56 2021
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) E-2378G CPU @ 2.80GHz
  1 "physical id"s (chips)
  16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 1 2 3 4 5 6 7
```

```
From lscpu from util-linux 2.32.1:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:  0-15
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
CPU family:            6
Model:                 167
Model name:            Intel(R) Xeon(R) E-2378G CPU @ 2.80GHz
BIOS Model name:      Intel(R) Xeon(R) E-2378G CPU @ 2.80GHz
Stepping:               1
CPU MHz:               4333.928
CPU max MHz:           2801.0000
CPU min MHz:           800.0000
BogoMIPS:              5616.00
Virtualization:        VT-x
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

SPECspeed®2017\_fp\_base = 43.1

SPECspeed®2017\_fp\_peak = 44.0

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## Platform Notes (Continued)

L1d cache: 48K  
L1i cache: 32K  
L2 cache: 512K  
L3 cache: 16384K  
NUMA node0 CPU(s): 0-15  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpf perf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb invpcid\_single ssbd ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid ept\_ad fsgsbase tsc\_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx smap avx512ifma clflushopt intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavew xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq rdpid fsrm md\_clear flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 16384 KB

From numactl --hardware  
WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 1 nodes (0)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
node 0 size: 128815 MB  
node 0 free: 121176 MB  
node distances:  
node 0  
0: 10

From /proc/meminfo  
MemTotal: 131907500 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active  
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has  
performance

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux"  
VERSION="8.4 (Ootpa)"  
ID="rhel"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

SPECspeed®2017\_fp\_base = 43.1

SPECspeed®2017\_fp\_peak = 44.0

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## Platform Notes (Continued)

```
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga
```

```
uname -a:
Linux 135-170-143.engtw 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Nov 2 16:40

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	182G	15G	167G	9%	/

From /sys/devices/virtual/dmi/id

Vendor:	Supermicro
Product:	Super Server
Serial:	0123456789

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x Micron Technology 18ADF4G72AZ-3G2B3 32 GB 2 rank 3200, configured at 2933

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

**SPECspeed®2017\_fp\_base = 43.1**

**SPECspeed®2017\_fp\_peak = 44.0**

**CPU2017 License:** 001176

**Test Date:** Nov-2021

**Test Sponsor:** Supermicro

**Hardware Availability:** Sep-2021

**Tested by:** Supermicro

**Software Availability:** May-2021

## Platform Notes (Continued)

**BIOS:**

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 1.0  
BIOS Date: 08/31/2021  
BIOS Revision: 5.22

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base)

=====

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====

C | 644.nab\_s(peak)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base)

=====

-----  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

=====

C | 644.nab\_s(peak)

=====

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

SPECspeed®2017\_fp\_base = 43.1

SPECspeed®2017\_fp\_peak = 44.0

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## Compiler Version Notes (Continued)

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

SPECspeed®2017\_fp\_base = 43.1

SPECspeed®2017\_fp\_peak = 44.0

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubssn_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

SPECSpeed®2017\_fp\_base = 43.1

SPECSpeed®2017\_fp\_peak = 44.0

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

644.nab\_s: icx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-fsto -mfpmath=sse -funroll-loops -fiopenmp  
-DSPEC\_OPENMP -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC\_SUPPRESS\_OPENMP -DSPEC\_OPENMP -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR  
(X12STD-F , Intel Xeon E-2378G)

SPECSpeed®2017\_fp\_base = 43.1

SPECSpeed®2017\_fp\_peak = 44.0

CPU2017 License: 001176

Test Date: Nov-2021

Test Sponsor: Supermicro

Hardware Availability: Sep-2021

Tested by: Supermicro

Software Availability: May-2021

## Peak Optimization Flags (Continued)

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
            -prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
            -qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
            -DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
            -mbranches-within-32B-boundaries -nostandard-realloc-lhs
            -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-RKL-revA.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-RKL-revA.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-02 07:45:55-0400.

Report generated on 2021-11-24 11:19:06 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-23.