# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Supermicro

Microcloud SuperServer SYS-530MT-H8TNR
(X12STD-F , Intel Xeon E-2378G)

SPECspeed®2017_fp_base = 44.1

SPECspeed®2017_fp_peak = 44.7

**CPU2017 License:** 001176
**Test Sponsor:** Supermicro
**Tested by:** Supermicro

**Test Date:** Nov-2021
**Hardware Availability:** Sep-2021
**Software Availability:** May-2021

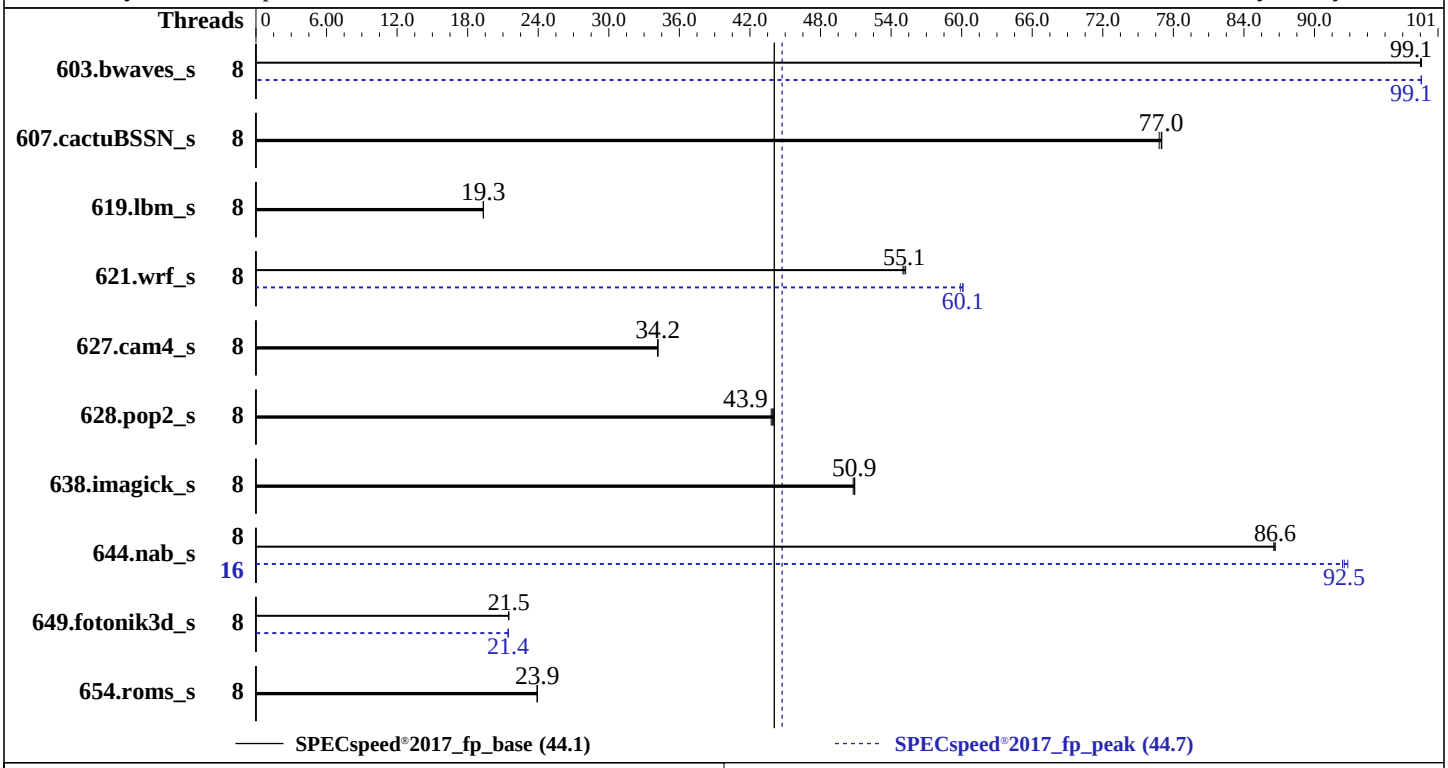


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E-2378G |
| Max MHz: | 5100 |
| Nominal: | 2800 |
| Enabled: | 8 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 512 KB I+D on chip per core |
| L3: | 16 MB I+D on chip per chip |
| Other: | None |
| Memory: | 128 GB (4 x 32 GB 2Rx8 PC4-3200AA-E, running at 2933) |
| Storage: | 1 x 200 GB SATA III SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux release 8.4<br>Kernel 4.18.0-305.el8.x86_64 |
| Compiler: | C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;<br>Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;<br>C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux |
| Parallel: | Yes |
| Firmware: | Version 1.0 released Aug-2021 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | OS set to prefer performance at the cost of additional power usage. |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 8 | 595 | 99.1 | 596 | 99.0 | **595** | **99.1** | 8 | 595 | 99.1 | 596 | 99.1 | **595** | **99.1** |
| 607.cactuBSSN_s | 8 | 217 | 76.8 | 216 | 77.0 | **217** | **77.0** | 8 | 217 | 76.8 | 216 | 77.0 | **217** | **77.0** |
| 619.lbm_s | 8 | 271 | 19.3 | **271** | **19.3** | 271 | 19.3 | 8 | 271 | 19.3 | **271** | **19.3** | 271 | 19.3 |
| 621.wrf_s | 8 | 240 | 55.0 | 239 | 55.2 | **240** | **55.1** | 8 | 220 | 60.1 | **220** | **60.1** | 221 | 59.9 |
| 627.cam4_s | 8 | 259 | 34.2 | **259** | **34.2** | 259 | 34.2 | 8 | 259 | 34.2 | **259** | **34.2** | 259 | 34.2 |
| 628.pop2_s | 8 | 270 | 44.0 | **270** | **43.9** | 271 | 43.8 | 8 | 270 | 44.0 | **270** | **43.9** | 271 | 43.8 |
| 638.imagick_s | 8 | **284** | **50.9** | 283 | 50.9 | 284 | 50.8 | 8 | **284** | **50.9** | 283 | 50.9 | 284 | 50.8 |
| 644.nab_s | 8 | **202** | **86.6** | 202 | 86.5 | 202 | 86.6 | 16 | 189 | 92.4 | 188 | 92.8 | **189** | **92.5** |
| 649.fotonik3d_s | 8 | 424 | 21.5 | **424** | **21.5** | 424 | 21.5 | 8 | 425 | 21.5 | **425** | **21.4** | 425 | 21.4 |
| 654.roms_s | 8 | 659 | 23.9 | **658** | **23.9** | 658 | 23.9 | 8 | 659 | 23.9 | **658** | **23.9** | 658 | 23.9 |

**SPECspeed®2017_fp_base = 44.1**

**SPECspeed®2017_fp_peak = 44.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

**(Continued on next page)**

## General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on 135-170-143.engtw Thu Nov  4 02:51:03 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) E-2378G CPU @ 2.80GHz
      1  "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              16
     On-line CPU(s) list: 0-15
     Thread(s) per core:  2
     Core(s) per socket:  8
     Socket(s):           1
     NUMA node(s):        1
     Vendor ID:           GenuineIntel
     BIOS Vendor ID:      Intel(R) Corporation
     CPU family:          6
     Model:               167
     Model name:          Intel(R) Xeon(R) E-2378G CPU @ 2.80GHz
     BIOS Model name:     Intel(R) Xeon(R) E-2378G CPU @ 2.80GHz
     Stepping:            1
     CPU MHz:             3966.351
     CPU max MHz:         2801.0000
     CPU min MHz:         800.0000
     BogoMIPS:            5616.00
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      Virtualization:      VT-x
      L1d cache:           48K
      L1i cache:           32K
      L2 cache:            512K
      L3 cache:            16384K
      NUMA node0 CPU(s):   0-15
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
      sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
      aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
      ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
      fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid mpx avx512f avx512dq rdseed adx
      smap avx512ifma clflushopt intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2
      gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid fsrm md_clear
      flush_l1d arch_capabilities

/proc/cpuinfo cache data
   cache size : 16384 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
  node 0 size: 128815 MB
  node 0 free: 119393 MB
  node distances:
  node   0
    0:  10

From /proc/meminfo
   MemTotal:       131907500 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.4 (Ootpa)"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.4"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:
   Linux 135-170-143.engtw 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 Nov 2 16:40

SPEC is set to: /home/cpu2017
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-root xfs   182G   15G  167G   9% /

From /sys/devices/virtual/dmi/id
    Vendor:         Supermicro
    Product:        Super Server
    Serial:         0123456789

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     4x Micron Technology 18ADF4G72AZ-3G2B3 32 GB 2 rank 3200, configured at 2933

 BIOS:
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.0
    BIOS Date:         08/31/2021
    BIOS Revision:     5.22

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 644.nab_s(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 644.nab_s(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpc icc ifort

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks (except as noted below):
icc

644.nab_s: icx

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -fiopenmp
-DSPEC_OPENMP -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX2
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

**(Continued on next page)**

## Peak Optimization Flags (Continued)

649.fotonik3d_s: `Same as 603.bwaves_s`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `-m64 -std=c11 -Wl,-z,muldefs -prof-gen`(pass 1)
`-prof-use`(pass 2) `-ipo -xCORE-AVX2 -O3 -no-prec-div`
`-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4`
`-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP`
`-mbranches-within-32B-boundaries -nostandard-realloc-lhs`
`-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-RKL-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-RKL-revA.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-03 14:51:02-0400.
Report generated on 2021-11-24 11:20:09 by CPU2017 PS formatter v6442.
Originally published on 2021-11-23.