SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6138, 2.00 GHz)

SPECspeed®2017_fp_base = 52.5

SPECspeed®2017_fp_peak = 53.3

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2021
Hardware Availability: Apr-2019
Software Availability: Dec-2020

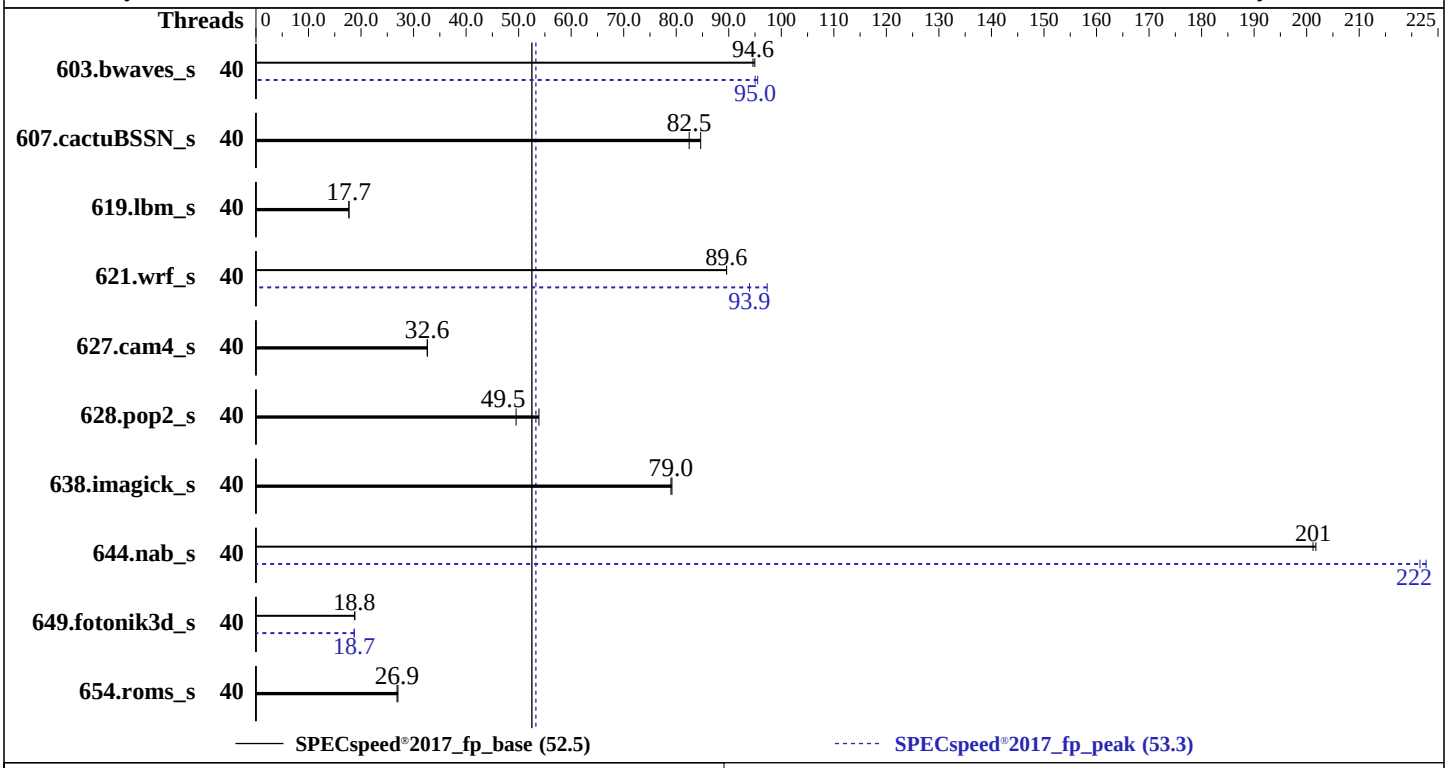

Hardware

CPU Name:	Intel Xeon Gold 6138
Max MHz:	3700
Nominal:	2000
Enabled:	40 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	27.5 MB I+D on chip per chip
Other:	None
Memory:	320 GB (10 x 32 GB 2Rx4 PC4-2933Y-R, running at 2666)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel:	Yes
Firmware:	Version 2.9.1 released Aug-2020
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	40	**624**	**94.6**	621	95.0			40	618	95.5	**621**	**95.0**		
607.cactuBSSN_s	40	197	84.7	**202**	**82.5**			40	197	84.7	**202**	**82.5**		
619.lbm_s	40	**296**	**17.7**	296	17.7			40	**296**	**17.7**	296	17.7		
621.wrf_s	40	**148**	**89.6**	148	89.6			40	**141**	**93.9**	136	97.3		
627.cam4_s	40	272	32.6	**272**	**32.6**			40	272	32.6	**272**	**32.6**		
628.pop2_s	40	220	53.9	**240**	**49.5**			40	220	53.9	**240**	**49.5**		
638.imagick_s	40	**183**	**79.0**	182	79.2			40	**183**	**79.0**	182	79.2		
644.nab_s	40	86.6	202	**86.8**	**201**			40	**78.9**	**222**	78.4	223		
649.fotonik3d_s	40	**486**	**18.8**	484	18.8			40	**488**	**18.7**	487	18.7		
654.roms_s	40	582	27.0	**586**	**26.9**			40	582	27.0	**586**	**26.9**		

SPECspeed®2017_fp_base = 52.5

SPECspeed®2017_fp_peak = 53.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.7-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
     1.7-ic2021.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS settings:
             Logical Processor : Disabled
     Virtualization Technology : Disabled

                System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                    C States : Autonomous
           Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
   CPU Interconnect Bus Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-ic2021.1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Fri Apr 30 16:31:35 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
      2  "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 20
      siblings  : 20
      physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              40
```

(Continued on next page)

Platform Notes (Continued)

```
      On-line CPU(s) list: 0-39
      Thread(s) per core:  1
      Core(s) per socket:  20
      Socket(s):           2
      NUMA node(s):        2
      Vendor ID:           GenuineIntel
      CPU family:          6
      Model:               85
      Model name:          Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
      Stepping:            4
      CPU MHz:             1018.339
      CPU max MHz:         3700.0000
      CPU min MHz:         1000.0000
      BogoMIPS:            4000.00
      Virtualization:      VT-x
      L1d cache:           32K
      L1i cache:           32K
      L2 cache:            1024K
      L3 cache:            28160K
      NUMA node0 CPU(s):   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38
      NUMA node1 CPU(s):   1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
      invpcid_single pti intel_ppin ssbd mba ibrs ibpb stibp fsgsbase tsc_adjust bmi1 hle
      avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap
      clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke
      md_clear flush_l1d

  /proc/cpuinfo cache data
     cache size : 28160 KB

  From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a
  physical chip.
    available: 2 nodes (0-1)
    node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38
    node 0 size: 183566 MB
    node 0 free: 177752 MB
    node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39
    node 1 size: 123435 MB
    node 1 free: 127675 MB
    node distances:
    node   0   1
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  21
     1:  21  10

From /proc/meminfo
   MemTotal:       329533144 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.3 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.3"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
   Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                 KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):                Mitigation: PTE Inversion; VMX:
                                                  conditional cache flushes, SMT
                                                  disabled
Microarchitectural Data Sampling:               Mitigation: Clear CPU buffers; SMT
                                                  disabled
CVE-2017-5754 (Meltdown):                         Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):         Mitigation: Speculative Store
                                                  Bypass disabled via prctl and
                                                  seccomp
CVE-2017-5753 (Spectre variant 1):                Mitigation: usercopy/swapgs
                                                  barriers and __user pointer
                                                  sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Full generic
                                                       retpoline, IBPB: conditional,
                                                       IBRS_FW, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Mitigation: Clear CPU buffers; SMT
                                                       disabled

 run-level 3 Apr 30 13:33

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-ic2021.1
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  125G   11G  115G   9% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge C6420
     Product Family: PowerEdge

 Additional information from dmidecode follows.  WARNING: Use caution when you interpret
 this section. The 'dmidecode' program reads system data which is "intended to allow
 hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     6x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2666
     1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2666
     3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2666
     6x Not Specified Not Specified

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      2.9.1
    BIOS Date:         08/10/2020
    BIOS Revision:     2.9

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C               | 644.nab_s(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C               | 644.nab_s(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:
```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Benchmarks using both Fortran and C:
```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:
```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

644.nab_s: `icx`

Fortran benchmarks:
```
ifort
```

Benchmarks using both Fortran and C:
```
ifort icc
```

Benchmarks using Fortran, C, and C++:
```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -fiopenmp
-DSPEC_OPENMP -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

649.fotonik3d_s: Same as 603.bwaves_s

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-04-30 17:31:34-0400.
Report generated on 2021-12-07 16:59:59 by CPU2017 PS formatter v6442.
Originally published on 2021-12-07.