SPEC CPU®2017 Integer Speed Result

Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017_int_base =	8.87
SPECspeed®2017_int_peak =	Not Run

CPU2017 License:	19	**Test Date:**	Feb-2022
Test Sponsor:	Fujitsu	**Hardware Availability:**	Mar-2022
Tested by:	Fujitsu	**Software Availability:**	Jun-2021

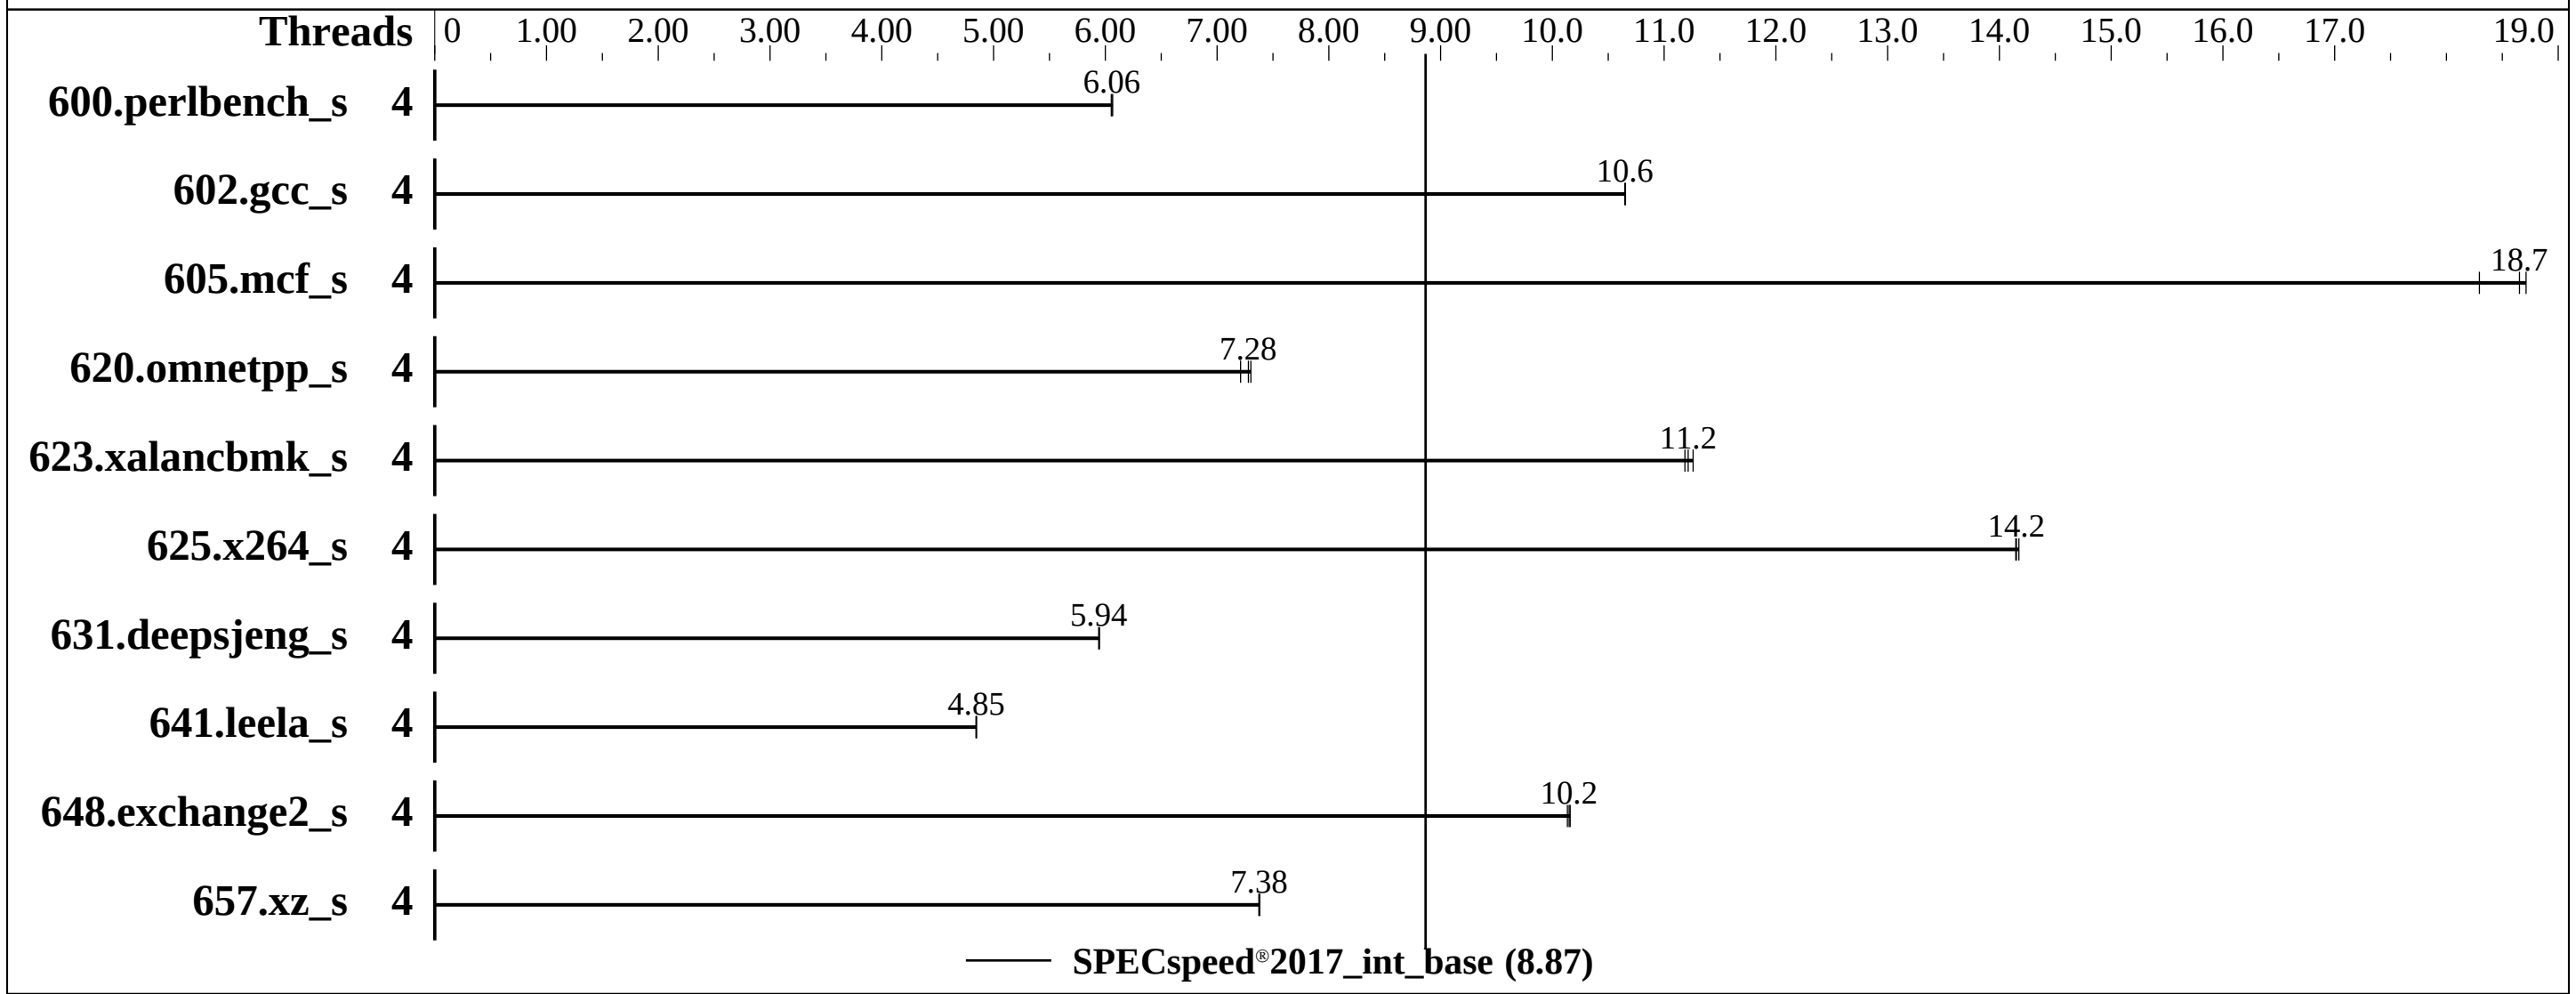

Hardware

CPU Name:	Intel Pentium Gold G6405
Max MHz:	4100
Nominal:	4100
Enabled:	2 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	256 KB I+D on chip per core
L3:	4 MB I+D on chip per chip
Other:	None
Memory:	32 GB (2 x 16 GB 2Rx8 PC4-3200AA-E, running at 2667)
Storage:	1 x SATA M.2 SSD, 240GB
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Parallel:	Yes
Firmware:	Fujitsu BIOS Version V5.0.0.22 R1.31.0 for D3931-A1x. Released Mar-2022 tested as V5.0.0.22 R1.20.0 for D3931-A1x Jan-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Fujitsu

PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017_int_base = 8.87

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	4	**293**	**6.06**	293	6.07	293	6.05							
602.gcc_s	4	374	10.6	374	10.7	**374**	**10.6**							
605.mcf_s	4	258	18.3	**253**	**18.7**	252	18.7							
620.omnetpp_s	4	226	7.21	223	7.30	**224**	**7.28**							
623.xalancbmk_s	4	127	11.2	126	11.3	**126**	**11.2**							
625.x264_s	4	**125**	**14.2**	124	14.2	125	14.1							
631.deepsjeng_s	4	**241**	**5.94**	241	5.95	241	5.94							
641.leela_s	4	**352**	**4.85**	352	4.85	352	4.84							
648.exchange2_s	4	**290**	**10.2**	289	10.2	290	10.1							
657.xz_s	4	**838**	**7.38**	838	7.37	837	7.38							

SPECspeed®2017_int_base = 8.87

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
cpupower -c all frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu/lib/intel64:/home/Benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

(Continued on next page)

Fujitsu
PRIMERGY TX1330 M5, Intel Pentium Gold G6405, 4.10GHz

SPECspeed®2017_int_base = 8.87
SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Jun-2021

General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Energy Efficient Turbo = Disabled
FAN Control = Full
SA GV High Gear = Gear1

Sysinfo program /home/Benchmark/speccpu/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Thu Feb 10 14:40:25 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Pentium(R) Gold G6405 CPU @ 4.10GHz
      1  "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 2
      siblings  : 4
      physical 0: cores 0 1

From lscpu from util-linux 2.36.2:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Byte Order:                      Little Endian
     Address sizes:                   39 bits physical, 48 bits virtual
     CPU(s):                          4
     On-line CPU(s) list:             0-3
     Thread(s) per core:              2
     Core(s) per socket:              2
     Socket(s):                       1
     NUMA node(s):                    1
     Vendor ID:                       GenuineIntel
     CPU family:                      6
     Model:                           165
     Model name:                      Intel(R) Pentium(R) Gold G6405 CPU @ 4.10GHz
     Stepping:                        3
     CPU MHz:                         4100.005
```

(Continued on next page)

Platform Notes (Continued)

```
     CPU max MHz:                     4100.0000
     CPU min MHz:                     800.0000
     BogoMIPS:                        8199.79
     Virtualization:                  VT-x
     L1d cache:                       64 KiB
     L1i cache:                       64 KiB
     L2 cache:                        512 KiB
     L3 cache:                        4 MiB
     NUMA node0 CPU(s):               0-3
     Vulnerability Itlb multihit:     KVM: Mitigation: VMX disabled
     Vulnerability L1tf:              Not affected
     Vulnerability Mds:               Not affected
     Vulnerability Meltdown:          Not affected
     Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
     prctl and seccomp
     Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
     pointer sanitization
     Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
     filling
     Vulnerability Srbds:             Not affected
     Vulnerability Tsx async abort:   Not affected
     Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
     pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
     pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
     nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3
     sdbg cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
     xsave rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb
     stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
     smep erms invpcid mpx rdseed smap clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves
     dtherm arat pln pts hwp hwp_notify hwp_act_window hwp_epp md_clear flush_l1d
     arch_capabilities

 From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL SETS PHY-LINE COHERENCY-SIZE
     L1d       32K      64K    8 Data            1   64        1             64
     L1i       32K      64K    8 Instruction     1   64        1             64
     L2       256K     512K    4 Unified         2 1024        1             64
     L3         4M       4M   16 Unified         3 4096        1             64

 /proc/cpuinfo cache data
    cache size : 4096 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 1 nodes (0)
   node 0 cpus: 0 1 2 3
   node 0 size: 31545 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 free: 31116 MB
  node distances:
  node   0
    0:  10

From /proc/meminfo
   MemTotal:       32303016 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP3"
      VERSION_ID="15.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:
   Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021
   (ba3c2e9/lp-5d9e8aa) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          KVM: Mitigation: VMX disabled
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Feb 10 14:38
```

(Continued on next page)

Platform Notes (Continued)

```
 SPEC is set to: /home/Benchmark/speccpu
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda4      xfs   180G   44G  137G  24% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         FUJITSU
     Product:        PRIMERGY TX1330 M5
     Product Family: SERVER
     Serial:         EWBUxxxxxx

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     2x Samsung M391A2K43DB1-CWE 16 GB 2 rank 3200, configured at 2667

 BIOS:
    BIOS Vendor:       FUJITSU // American Megatrends International, LLC.
    BIOS Version:      V5.0.0.22 R1.20.0 for D3931-A1x
    BIOS Date:         01/11/2022
    BIOS Revision:     1.20

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
        | 625.x264_s(base) 657.xz_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
        | 641.leela_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran | 648.exchange2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifort`

Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xSSE4.2 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:
```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xSSE4.2 -O3 -ffast-math -flto
```

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc

Fortran benchmarks:

-m64 -xSSE4.2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevD.html
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-RKL-RevD.xml
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-10 00:40:25-0500.
Report generated on 2022-03-16 13:59:25 by CPU2017 PS formatter v6442.
Originally published on 2022-03-16.