SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7525 (AMD EPYC 7773X 64-Core Processor)

SPECspeed®2017_fp_base = 269

SPECspeed®2017_fp_peak = 278

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2022
Hardware Availability: Mar-2022
Software Availability: Feb-2022

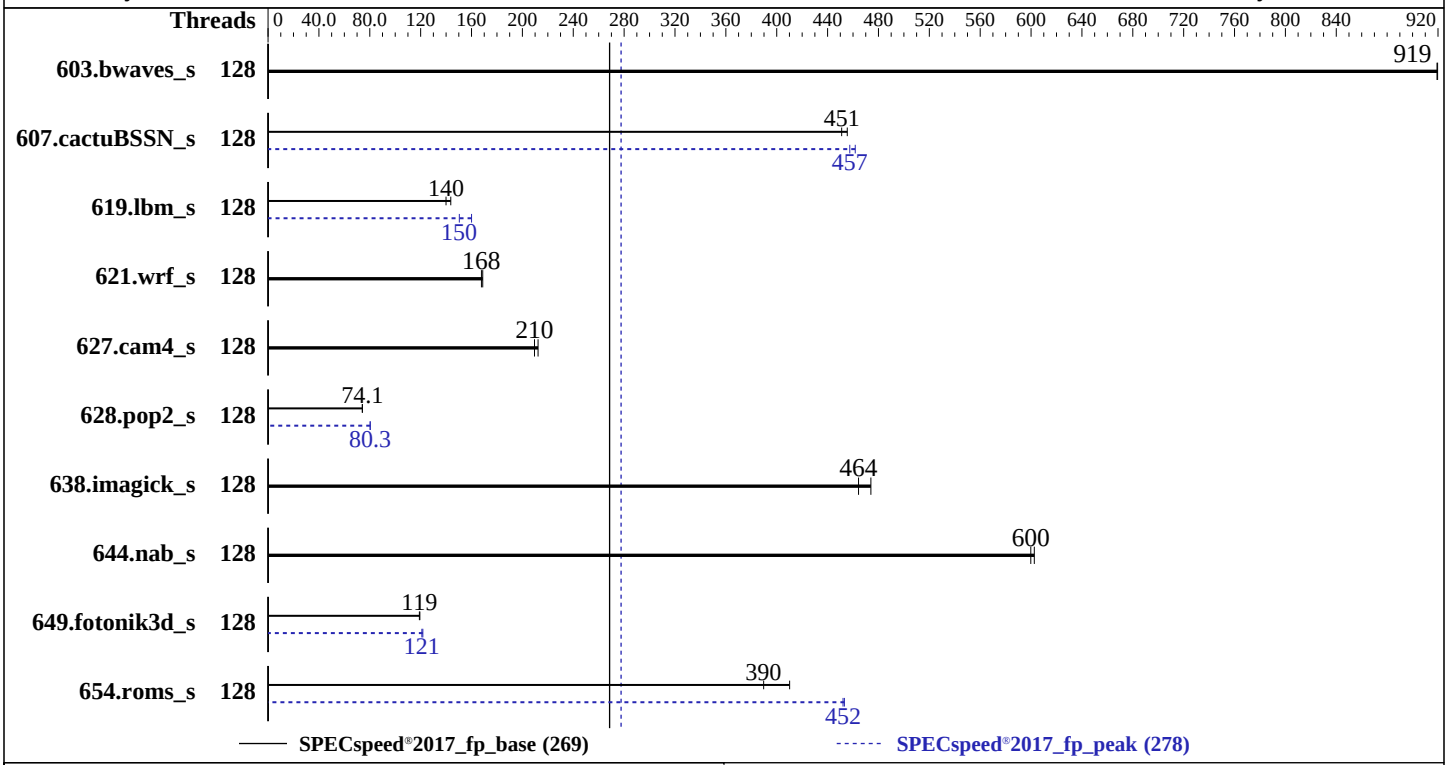

Hardware

CPU Name:	AMD EPYC 7773X
Max MHz:	3500
Nominal:	2200
Enabled:	128 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	768 MB I+D on chip per chip, 96 MB shared / 8 cores
Other:	None
Memory:	2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	Ubuntu 20.04.4 LTS 5.4.0-100-generic
Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Parallel:	Yes
Firmware:	Version 2.6.5 released Dec-2021
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	**64.2**	**919**	64.2	920			128	**64.2**	**919**	64.2	920		
607.cactuBSSN_s	128	**37.0**	**451**	36.6	455			128	**36.4**	**457**	36.1	462		
619.lbm_s	128	36.5	144	**37.4**	**140**			128	**34.8**	**150**	32.7	160		
621.wrf_s	128	**78.8**	**168**	78.3	169			128	**78.8**	**168**	78.3	169		
627.cam4_s	128	**42.3**	**210**	41.7	212			128	**42.3**	**210**	41.7	212		
628.pop2_s	128	160	74.2	**160**	**74.1**			128	**148**	**80.3**	148	80.4		
638.imagick_s	128	30.4	474	**31.1**	**464**			128	30.4	474	**31.1**	**464**		
644.nab_s	128	**29.1**	**600**	29.0	603			128	**29.1**	**600**	29.0	603		
649.fotonik3d_s	128	**76.6**	**119**	76.4	119			128	74.9	122	**75.4**	**121**		
654.roms_s	128	38.4	410	**40.4**	**390**			128	34.7	453	**34.8**	**452**		

SPECspeed®2017_fp_base = 269

SPECspeed®2017_fp_peak = 278

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
      "/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_speed_aocc320_milanx_A_lib/li
      b;/mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/amd_speed_aocc320_milanx_A_lib/l
      ib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-127"
PGHPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-127"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2


 Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS settings:
          Logical Processor : Disabled
    L3 Cache as NUMA Domain : Enabled
  Virtualization Technology : Disabled
         DRAM Refresh Delay : Performance

             System Profile : Custom
       CPU Power Management : Maximum Performance
        Memory Patrol Scrub : Disabled
        PCI ASPM L1 Link
           Power Management : Disabled
   Algorithm Performance
      Boost Disable (ApbDis): Enabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on spa-dev-sut Fri Feb 25 16:36:33 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 7773X 64-Core Processor
       2  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 64
       siblings  : 64
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
```

(Continued on next page)

Platform Notes (Continued)

```
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63

 From lscpu from util-linux 2.34:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Byte Order:                      Little Endian
      Address sizes:                   48 bits physical, 48 bits virtual
      CPU(s):                          128
      On-line CPU(s) list:             0-127
      Thread(s) per core:              1
      Core(s) per socket:              64
      Socket(s):                       2
      NUMA node(s):                    16
      Vendor ID:                       AuthenticAMD
      CPU family:                      25
      Model:                           1
      Model name:                      AMD EPYC 7773X 64-Core Processor
      Stepping:                        2
      CPU MHz:                         1796.149
      BogoMIPS:                        4391.64
      Virtualization:                  AMD-V
      L1d cache:                       4 MiB
      L1i cache:                       4 MiB
      L2 cache:                        64 MiB
      L3 cache:                        1.5 GiB
      NUMA node0 CPU(s):               0-7
      NUMA node1 CPU(s):               8-15
      NUMA node2 CPU(s):               16-23
      NUMA node3 CPU(s):               24-31
      NUMA node4 CPU(s):               32-39
      NUMA node5 CPU(s):               40-47
      NUMA node6 CPU(s):               48-55
      NUMA node7 CPU(s):               56-63
      NUMA node8 CPU(s):               64-71
      NUMA node9 CPU(s):               72-79
      NUMA node10 CPU(s):              80-87
      NUMA node11 CPU(s):              88-95
      NUMA node12 CPU(s):              96-103
      NUMA node13 CPU(s):              104-111
      NUMA node14 CPU(s):              112-119
      NUMA node15 CPU(s):              120-127
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
      Vulnerability Mds:                Not affected
      Vulnerability Meltdown:           Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
      IBRS_FW, STIBP disabled, RSB filling
      Vulnerability Srbds:              Not affected
      Vulnerability Tsx async abort:    Not affected
      Flags:                            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
      clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL
      L1d       32K       4M    8 Data            1
      L1i       32K       4M    8 Instruction     1
      L2       512K      64M    8 Unified         2
      L3        96M     1.5G   16 Unified         3

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 4 5 6 7
    node 0 size: 128650 MB
    node 0 free: 128481 MB
    node 1 cpus: 8 9 10 11 12 13 14 15
    node 1 size: 129021 MB
    node 1 free: 128915 MB
    node 2 cpus: 16 17 18 19 20 21 22 23
    node 2 size: 129021 MB
    node 2 free: 128903 MB
    node 3 cpus: 24 25 26 27 28 29 30 31
    node 3 size: 129021 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 3 free: 125448 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 129021 MB
node 4 free: 128895 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 129021 MB
node 5 free: 128906 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 129021 MB
node 6 free: 128862 MB
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 116908 MB
node 7 free: 116793 MB
node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 129021 MB
node 8 free: 128923 MB
node 9 cpus: 72 73 74 75 76 77 78 79
node 9 size: 129021 MB
node 9 free: 128929 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 129021 MB
node 10 free: 128933 MB
node 11 cpus: 88 89 90 91 92 93 94 95
node 11 size: 129021 MB
node 11 free: 128927 MB
node 12 cpus: 96 97 98 99 100 101 102 103
node 12 size: 128993 MB
node 12 free: 128837 MB
node 13 cpus: 104 105 106 107 108 109 110 111
node 13 size: 129021 MB
node 13 free: 128802 MB
node 14 cpus: 112 113 114 115 116 117 118 119
node 14 size: 129021 MB
node 14 free: 128923 MB
node 15 cpus: 120 121 122 123 124 125 126 127
node 15 size: 129016 MB
node 15 free: 128922 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  1:  11  10  11  11  11  11  11  11  32  32  32  32  32  32  32  32
  2:  11  11  10  11  11  11  11  11  32  32  32  32  32  32  32  32
  3:  11  11  11  10  11  11  11  11  32  32  32  32  32  32  32  32
  4:  11  11  11  11  10  11  11  11  32  32  32  32  32  32  32  32
  5:  11  11  11  11  11  10  11  11  32  32  32  32  32  32  32  32
  6:  11  11  11  11  11  11  10  11  32  32  32  32  32  32  32  32
  7:  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     8:  32  32  32  32  32  32  32  32  10  11  11  11  11  11  11  11
     9:  32  32  32  32  32  32  32  32  11  10  11  11  11  11  11  11
    10:  32  32  32  32  32  32  32  32  11  11  10  11  11  11  11  11
    11:  32  32  32  32  32  32  32  32  11  11  11  10  11  11  11  11
    12:  32  32  32  32  32  32  32  32  11  11  11  11  10  11  11  11
    13:  32  32  32  32  32  32  32  32  11  11  11  11  11  10  11  11
    14:  32  32  32  32  32  32  32  32  11  11  11  11  11  11  10  11
    15:  32  32  32  32  32  32  32  32  11  11  11  11  11  11  11  10

  From /proc/meminfo
     MemTotal:       2101076456 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /usr/bin/lsb_release -d
     Ubuntu 20.04.4 LTS

  From /etc/*release* /etc/*version*
     debian_version: bullseye/sid
     os-release:
        NAME="Ubuntu"
        VERSION="20.04.4 LTS (Focal Fossa)"
        ID=ubuntu
        ID_LIKE=debian
        PRETTY_NAME="Ubuntu 20.04.4 LTS"
        VERSION_ID="20.04"
        HOME_URL="https://www.ubuntu.com/"
        SUPPORT_URL="https://help.ubuntu.com/"

  uname -a:
     Linux spa-dev-sut 5.4.0-100-generic #113-Ubuntu SMP Thu Feb 3 18:43:29 UTC 2022 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                    Not affected
  CVE-2018-3620 (L1 Terminal Fault):                 Not affected
  Microarchitectural Data Sampling:                  Not affected
  CVE-2017-5754 (Meltdown):                          Not affected
  CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                     Bypass disabled via prctl and
                                                     seccomp
  CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                     barriers and __user pointer
```

(Continued on next page)

Platform Notes (Continued)

```
                                                    sanitization
 CVE-2017-5715 (Spectre variant 2):                  Mitigation: Full AMD retpoline,
                                                   IBPB: conditional, IBRS_FW, STIBP:
                                                    disabled, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):            Not affected

 run-level 3 Feb 25 14:05

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc320-A1
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  125G  3.3G  122G   3% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R7525
     Product Family: PowerEdge
     Serial:         48LN333

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
     16x Not Specified Not Specified

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      2.6.5
    BIOS Date:         12/28/2021
    BIOS Revision:     2.6

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument -Wno-return-type

Peak Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: `-m64 -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true -mllvm -function-specialize -mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

Fortran benchmarks:

603.bwaves_s: `basepeak = yes`

649.fotonik3d_s: `-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching -Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang`

654.roms_s: `-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching -Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang`

Benchmarks using both Fortran and C:

(Continued on next page)

Peak Optimization Flags (Continued)

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:
-Wno-unused-command-line-argument -Wno-return-type

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument -Wno-return-type`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument -Wno-return-type`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.4.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-25 11:36:33-0500.
Report generated on 2022-03-21 16:17:49 by CPU2017 PS formatter v6442.
Originally published on 2022-03-21.