SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur I24LM6 (Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 516

SPECrate®2017_int_peak = 537

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Feb-2022
Hardware Availability: May-2021
Software Availability: Nov-2021

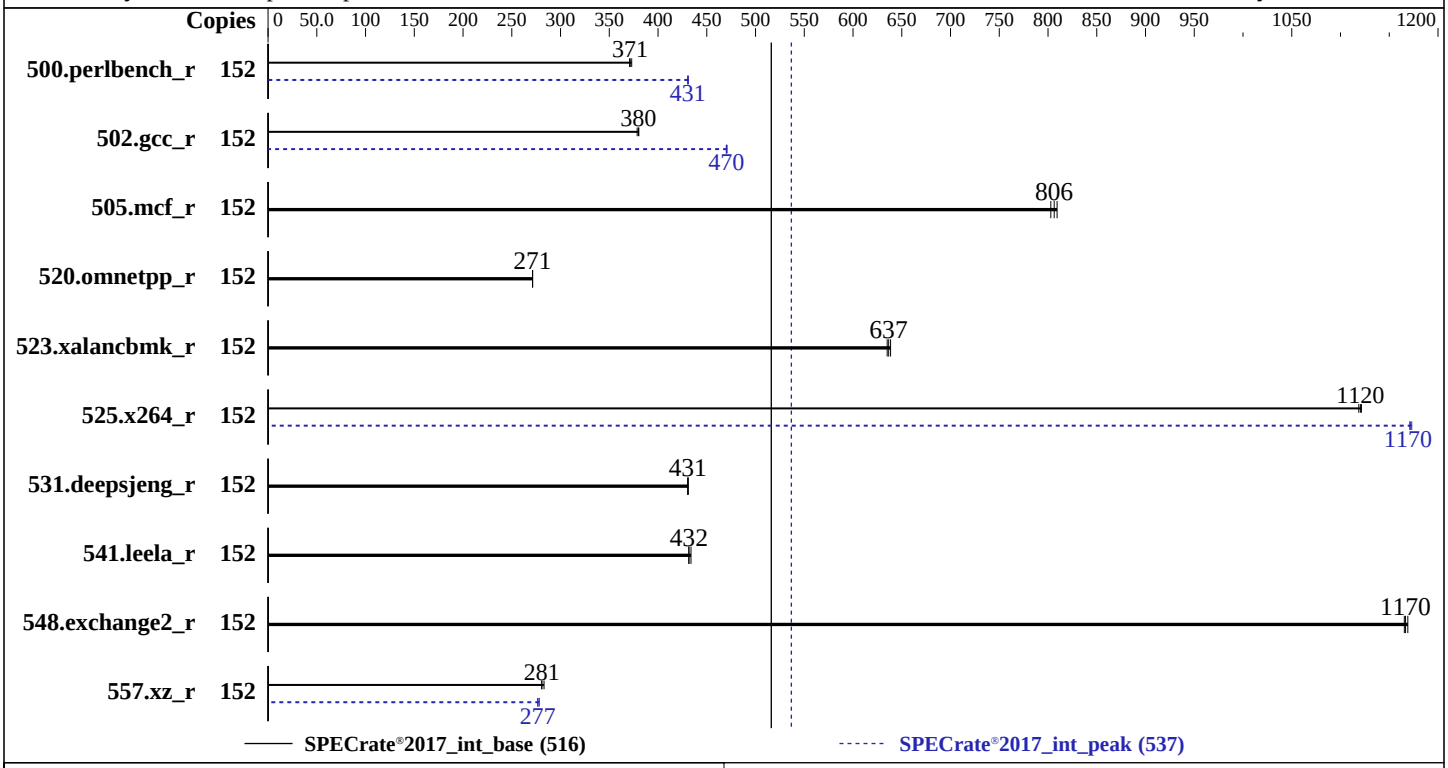

Hardware

CPU Name:	Intel Xeon Platinum 8368Q
Max MHz:	3700
Nominal:	2600
Enabled:	76 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	57 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.5 (Ootpa) 4.18.0-348.el8.x86_64
Compiler:	C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux; C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux; Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux
Parallel:	No
Firmware:	Version 05.01.02 released Aug-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur I24LM6 (Intel Xeon Platinum 8368Q)

SPECrate®2017_int_base = 516

SPECrate®2017_int_peak = 537

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: Feb-2022
Hardware Availability: May-2021
Software Availability: Nov-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	152	649	373	653	371	**651**	**371**	152	561	431	562	430	**562**	**431**
502.gcc_r	152	568	379	566	380	**566**	**380**	152	457	471	458	470	**458**	**470**
505.mcf_r	152	306	803	**305**	**806**	304	809	152	306	803	**305**	**806**	304	809
520.omnetpp_r	152	735	271	735	271	**735**	**271**	152	735	271	735	271	**735**	**271**
523.xalancbmk_r	152	**252**	**637**	251	639	253	635	152	**252**	**637**	251	639	253	635
525.x264_r	152	238	1120	**238**	**1120**	237	1120	152	227	1170	**227**	**1170**	227	1170
531.deepsjeng_r	152	405	430	**404**	**431**	404	431	152	405	430	**404**	**431**	404	431
541.leela_r	152	583	432	580	434	**583**	**432**	152	583	432	580	434	**583**	**432**
548.exchange2_r	152	342	1170	341	1170	**341**	**1170**	152	342	1170	341	1170	**341**	**1170**
557.xz_r	152	580	283	**584**	**281**	585	281	152	590	278	**593**	**277**	593	277

SPECrate®2017_int_base = 516

SPECrate®2017_int_peak = 537

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/CPU2017/lib/intel64:/home/CPU2017/lib/ia32:/home/CPU2017/je5.0.1-
     32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS and OS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to enable
Scaling_Governor set to Performance

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Wed Feb 23 15:08:23 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
      2  "physical id"s (chips)
      152 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 38
      siblings  : 76
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37

From lscpu from util-linux 2.32.1:
```

(Continued on next page)

Platform Notes (Continued)

```
      Architecture:          x86_64
      CPU op-mode(s):        32-bit, 64-bit
      Byte Order:            Little Endian
      CPU(s):                152
      On-line CPU(s) list:   0-151
      Thread(s) per core:    2
      Core(s) per socket:    38
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      BIOS Vendor ID:        Intel(R) Corporation
      CPU family:            6
      Model:                 106
      Model name:            Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
      BIOS Model name:       Intel(R) Xeon(R) Platinum 8368Q CPU @ 2.60GHz
      Stepping:              6
      CPU MHz:               3700.000
      CPU max MHz:           3700.0000
      CPU min MHz:           800.0000
      BogoMIPS:              5200.00
      Virtualization:        VT-x
      L1d cache:             48K
      L1i cache:             32K
      L2 cache:              1280K
      L3 cache:              58368K
      NUMA node0 CPU(s):     0-18,76-94
      NUMA node1 CPU(s):     19-37,95-113
      NUMA node2 CPU(s):     38-56,114-132
      NUMA node3 CPU(s):     57-75,133-151
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
      pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
      rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin
      ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust sgx bmi1 hle avx2 smep
      bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
      clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
      cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm
      ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
      avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear
      pconfig flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 58368 KB

 From numactl --hardware
```


(Continued on next page)

Platform Notes (Continued)

```
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 76 77 78 79 80 81 82 83 84
  85 86 87 88 89 90 91 92 93 94
  node 0 size: 129014 MB
  node 0 free: 125832 MB
  node 1 cpus: 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 95 96 97 98 99
  100 101 102 103 104 105 106 107 108 109 110 111 112 113
  node 1 size: 128572 MB
  node 1 free: 127945 MB
  node 2 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 114 115 116 117
  118 119 120 121 122 123 124 125 126 127 128 129 130 131 132
  node 2 size: 129015 MB
  node 2 free: 128747 MB
  node 3 cpus: 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 133 134 135 136
  137 138 139 140 141 142 143 144 145 146 147 148 149 150 151
  node 3 size: 129011 MB
  node 3 free: 128777 MB
  node distances:
  node   0   1   2   3
    0:  10  20  20  20
    1:  20  10  20  20
    2:  20  20  10  20
    3:  20  20  20  10

From /proc/meminfo
   MemTotal:       527988780 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.5 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.5"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
```

(Continued on next page)

Platform Notes (Continued)

```
    system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
    system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

  uname -a:
    Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021
    x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                           Bypass disabled via prctl and
                                                           seccomp
  CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
  CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                           conditional, RSB filling
  CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
  CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

  run-level 3 Feb 23 15:07

  SPEC is set to: /home/CPU2017
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-home xfs   372G  6.9G  365G   2% /home

  From /sys/devices/virtual/dmi/id
      Vendor:          Inspur
      Product:         NS5160LM6
      Product Family: Family
      Serial:          221484327

  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
  interpret this section. The 'dmidecode' program reads system data which is "intended to
  allow hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

  BIOS:
     BIOS Vendor:       American Megatrends Inc.
     BIOS Version:      05.01.02
     BIOS Date:         08/13/2021
```

(Continued on next page)

Platform Notes (Continued)

```
    BIOS Revision:     5.22

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(peak) 557.xz_r(peak)
------------------------------------------------------------------------------
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
  64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
  2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
  Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation.  All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):
icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-Wl,-z,muldefs -prof-gen`(pass 1) `-prof-use`(pass 2)
`-xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4 -fno-strict-overflow`
`-mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

502.gcc_r: `-m32`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin`
`-std=gnu89 -Wl,-z,muldefs -fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX512 -flto`
`-Ofast`(pass 1) `-O3 -ffast-math -qopt-mem-layout-trans=4`
`-mbranches-within-32B-boundaries`
`-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc`

505.mcf_r: `basepeak = yes`

525.x264_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto`
`-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias`
`-mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

557.xz_r: `-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div`
`-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries`
`-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin`
`-lqkmalloc`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.4.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V2.4.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-23 15:08:22-0500.
Report generated on 2022-03-16 14:00:37 by CPU2017 PS formatter v6442.
Originally published on 2022-03-16.