SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U
(AMD EPYC 7773X, 2.2 GHz)

SPECrate®2017_int_base = 824

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

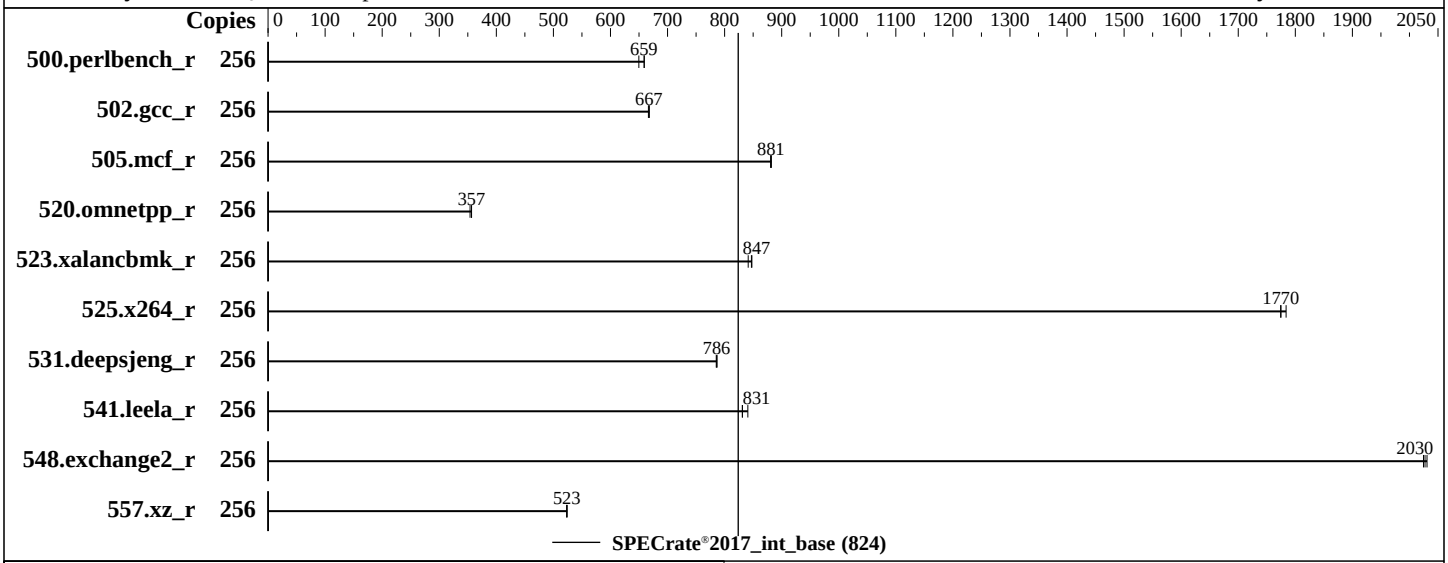

Hardware

CPU Name:	AMD EPYC 7773X
Max MHz:	3500
Nominal:	2200
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	768 MB I+D on chip per chip, 96 MB shared / 8 cores
Other:	None
Memory:	2 TB (16 x 128 GB 4DRx4 PC4-3200AA-L, running at 2933)
Storage:	1 x 480GB SATA SSD
Other:	None

Software

OS:	Ubuntu 20.04 LTS (x86_64) kernel 5.4.0-96-generic
Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Parallel:	No
Firmware:	Version 3C07.Q101 released Oct-2021
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U
(AMD EPYC 7773X, 2.2 GHz)

SPECrate®2017_int_base = 824

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	627	650	618	659	**619**	**659**							
502.gcc_r	256	543	668	**543**	**667**	544	666							
505.mcf_r	256	469	882	**469**	**881**	470	881							
520.omnetpp_r	256	949	354	**942**	**357**	942	357							
523.xalancbmk_r	256	**319**	**847**	321	841	319	848							
525.x264_r	256	**253**	**1770**	253	1770	251	1780							
531.deepsjeng_r	256	**373**	**786**	373	787	374	785							
541.leela_r	256	510	831	**510**	**831**	504	841							
548.exchange2_r	256	331	2020	330	2030	**331**	**2030**							
557.xz_r	256	528	524	**528**	**523**	528	523							

SPECrate®2017_int_base = 824

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/root/56882_1.12/speccpu2017_rate_aocc320_A1/amd_rate_aocc320_milanx_A_
     lib/lib;/root/56882_1.12/speccpu2017_rate_aocc320_A1/amd_rate_aocc320_mi
     lanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2

Submitted: Tue Mar  1 02:50:38 EST 2022
Submission: cpu2017-20220301-31141.sub
```

Platform Notes

```
 BIOS Configuration
 SMT Control set to Enable
 NUMA nodes per socket set to NPS4
 Pwr and Perf Profile set to Performance
 Determinism Control is Manual
 Determinism Slider set to Power
 cTDP Control set to Manual
```

(Continued on next page)

Platform Notes (Continued)

```
cTDP set to 280
Package Power Limit Control is Manual
IOMMU is Enable
EDC set to 300
EDC Platform Limit set to 300
Memory Interleaving set to Disabled

Sysinfo program /root/56882_1.12/speccpu2017_rate_aocc320_A1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on quanta Sun Feb 27 01:28:37 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7773X 64-Core Processor
      2  "physical id"s (chips)
      256 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 64
      siblings  : 128
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59 60 61 62 63

From lscpu from util-linux 2.34:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Byte Order:                      Little Endian
     Address sizes:                   43 bits physical, 48 bits virtual
     CPU(s):                          256
     On-line CPU(s) list:             0-255
     Thread(s) per core:              2
     Core(s) per socket:              64
     Socket(s):                       2
     NUMA node(s):                    16
     Vendor ID:                       AuthenticAMD
     CPU family:                      25
     Model:                           1
     Model name:                      AMD EPYC 7773X 64-Core Processor
     Stepping:                        2
     Frequency boost:                 enabled
```

(Continued on next page)

Platform Notes (Continued)

```
CPU MHz:                         2755.337
CPU max MHz:                     2200.0000
CPU min MHz:                     1500.0000
BogoMIPS:                        4391.75
Virtualization:                  AMD-V
L1d cache:                       4 MiB
L1i cache:                       4 MiB
L2 cache:                        64 MiB
L3 cache:                        1.5 GiB
NUMA node0 CPU(s):               0-7,128-135
NUMA node1 CPU(s):               8-15,136-143
NUMA node2 CPU(s):               16-23,144-151
NUMA node3 CPU(s):               24-31,152-159
NUMA node4 CPU(s):               32-39,160-167
NUMA node5 CPU(s):               40-47,168-175
NUMA node6 CPU(s):               48-55,176-183
NUMA node7 CPU(s):               56-63,184-191
NUMA node8 CPU(s):               64-71,192-199
NUMA node9 CPU(s):               72-79,200-207
NUMA node10 CPU(s):              80-87,208-215
NUMA node11 CPU(s):              88-95,216-223
NUMA node12 CPU(s):              96-103,224-231
NUMA node13 CPU(s):              104-111,232-239
NUMA node14 CPU(s):              112-119,240-247
NUMA node15 CPU(s):              120-127,248-255
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2:        Mitigation; Full AMD retpoline, IBPB conditional,
IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:             Not affected
Vulnerability Tsx async abort:   Not affected
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev
ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx
smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
```

(Continued on next page)

Platform Notes (Continued)

```
      nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL
       L1d       32K       4M    8 Data            1
       L1i       32K       4M    8 Instruction     1
       L2       512K      64M    8 Unified         2
       L3        96M     1.5G   16 Unified         3

  /proc/cpuinfo cache data
     cache size : 512 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 16 nodes (0-15)
    node 0 cpus: 0 1 2 3 4 5 6 7 128 129 130 131 132 133 134 135
    node 0 size: 128890 MB
    node 0 free: 128346 MB
    node 1 cpus: 8 9 10 11 12 13 14 15 136 137 138 139 140 141 142 143
    node 1 size: 129018 MB
    node 1 free: 128547 MB
    node 2 cpus: 16 17 18 19 20 21 22 23 144 145 146 147 148 149 150 151
    node 2 size: 129020 MB
    node 2 free: 128759 MB
    node 3 cpus: 24 25 26 27 28 29 30 31 152 153 154 155 156 157 158 159
    node 3 size: 129019 MB
    node 3 free: 128698 MB
    node 4 cpus: 32 33 34 35 36 37 38 39 160 161 162 163 164 165 166 167
    node 4 size: 129020 MB
    node 4 free: 128766 MB
    node 5 cpus: 40 41 42 43 44 45 46 47 168 169 170 171 172 173 174 175
    node 5 size: 128990 MB
    node 5 free: 128731 MB
    node 6 cpus: 48 49 50 51 52 53 54 55 176 177 178 179 180 181 182 183
    node 6 size: 129020 MB
    node 6 free: 128767 MB
    node 7 cpus: 56 57 58 59 60 61 62 63 184 185 186 187 188 189 190 191
    node 7 size: 129007 MB
    node 7 free: 128763 MB
    node 8 cpus: 64 65 66 67 68 69 70 71 192 193 194 195 196 197 198 199
    node 8 size: 129020 MB
    node 8 free: 128700 MB
    node 9 cpus: 72 73 74 75 76 77 78 79 200 201 202 203 204 205 206 207
    node 9 size: 129019 MB
    node 9 free: 128669 MB
    node 10 cpus: 80 81 82 83 84 85 86 87 208 209 210 211 212 213 214 215
```

(Continued on next page)

Platform Notes (Continued)

```
   node 10 size: 129020 MB
   node 10 free: 128674 MB
   node 11 cpus: 88 89 90 91 92 93 94 95 216 217 218 219 220 221 222 223
   node 11 size: 129019 MB
   node 11 free: 128754 MB
   node 12 cpus: 96 97 98 99 100 101 102 103 224 225 226 227 228 229 230 231
   node 12 size: 129020 MB
   node 12 free: 128768 MB
   node 13 cpus: 104 105 106 107 108 109 110 111 232 233 234 235 236 237 238 239
   node 13 size: 129019 MB
   node 13 free: 128758 MB
   node 14 cpus: 112 113 114 115 116 117 118 119 240 241 242 243 244 245 246 247
   node 14 size: 129020 MB
   node 14 free: 128779 MB
   node 15 cpus: 120 121 122 123 124 125 126 127 248 249 250 251 252 253 254 255
   node 15 size: 129017 MB
   node 15 free: 128748 MB
   node distances:
   node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
     0:  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     1:  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
     2:  12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
     3:  12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
     4:  12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
     5:  12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
     6:  12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
     7:  12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
     8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
     9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
    10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
    11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
    12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
    13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
    14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
    15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

  From /proc/meminfo
     MemTotal:       2113682952 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance
```

(Continued on next page)

Platform Notes (Continued)

```
/usr/bin/lsb_release -d
   Ubuntu 20.04 LTS

From /etc/*release* /etc/*version*
   debian_version: bullseye/sid
   os-release:
      NAME="Ubuntu"
      VERSION="20.04 LTS (Focal Fossa)"
      ID=ubuntu
      ID_LIKE=debian
      PRETTY_NAME="Ubuntu 20.04 LTS"
      VERSION_ID="20.04"
      HOME_URL="https://www.ubuntu.com/"
      SUPPORT_URL="https://help.ubuntu.com/"

uname -a:
   Linux quanta 5.4.0-96-generic #109-Ubuntu SMP Wed Jan 12 16:49:16 UTC 2022 x86_64
   x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                       Mitigation: Full AMD retpoline,
                                                       IBPB: conditional, IBRS_FW, STIBP:
                                                         always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Feb 27 01:28

SPEC is set to: /root/56882_1.12/speccpu2017_rate_aocc320_A1
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      ext4  407G   26G  362G   7% /

From /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid D43K-1U
```

(Continued on next page)

Platform Notes (Continued)

```
 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393AAG40M32-CAE 128 GB 4 rank 3200, configured at 2933
     16x Unknown Unknown

 BIOS:
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      3C07.Q101
    BIOS Date:         10/26/2021
    BIOS Revision:     5.22
    Firmware Revision: 6.31

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
        | 525.x264_r(base) 557.xz_r(base)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
        | 541.leela_r(base)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

C++ benchmarks:
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v7_AMD_MILAN.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v7_AMD_MILAN.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-26 12:28:36-0500.
Report generated on 2022-03-21 13:22:36 by CPU2017 PS formatter v6442.
Originally published on 2022-03-21.