SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-28
(2.00 GHz,Intel Xeon Gold 6338)

SPECrate®2017_fp_base = 183

SPECrate®2017_fp_peak = 172

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2022
Hardware Availability: Apr-2021
Software Availability: May-2022

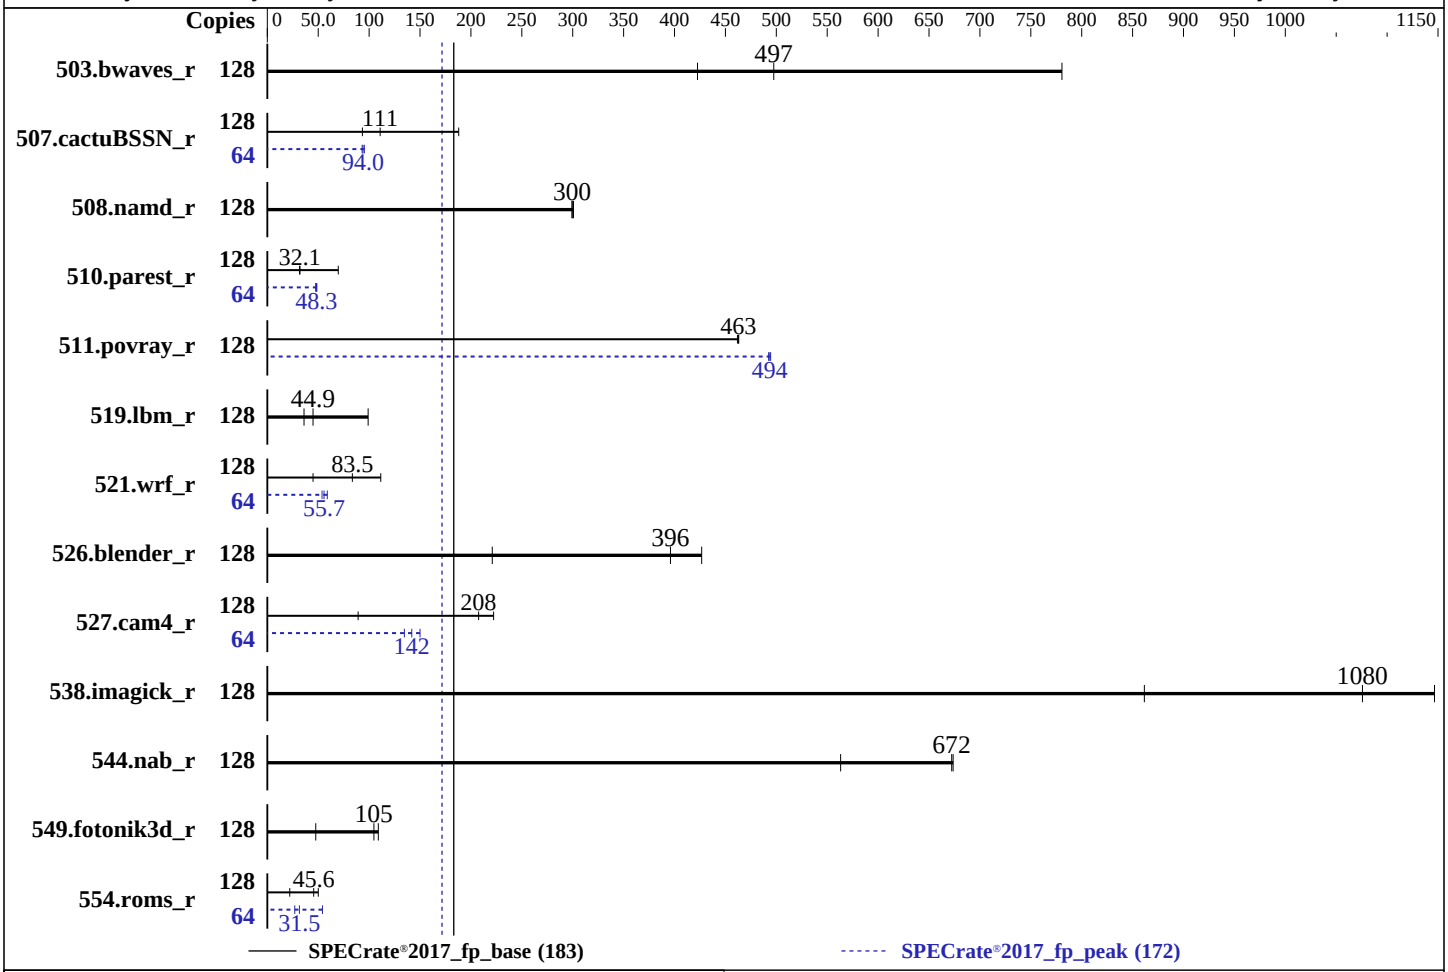

Hardware

CPU Name:	Intel Xeon Gold 6338
Max MHz:	3200
Nominal:	2000
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	48 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 512 GB NVMe SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.5 (Ootpa) 4.18.0-348.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.2b released Jun-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI100C2R-28
(2.00 GHz,Intel Xeon Gold 6338)

SPECrate®2017_fp_base = 183

SPECrate®2017_fp_peak = 172

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2022
Hardware Availability: Apr-2021
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	3037	423	1644	781	**2580**	**497**	128	3037	423	1644	781	**2580**	**497**
507.cactuBSSN_r	128	1735	93.4	862	188	**1462**	**111**	64	**862**	**94.0**	850	95.3	870	93.1
508.namd_r	128	**406**	**300**	404	301	406	299	128	**406**	**300**	404	301	406	299
510.parest_r	128	10592	31.6	4805	69.7	**10437**	**32.1**	64	3442	48.6	3529	47.4	**3467**	**48.3**
511.povray_r	128	**646**	**463**	645	463	647	462	128	604	494	**606**	**494**	607	492
519.lbm_r	128	**3005**	**44.9**	1362	99.0	3743	36.0	128	**3005**	**44.9**	1362	99.0	3743	36.0
521.wrf_r	128	**3432**	**83.5**	2573	111	6384	44.9	64	2433	58.9	**2574**	**55.7**	2667	53.7
526.blender_r	128	457	427	**492**	**396**	882	221	128	457	427	**492**	**396**	882	221
527.cam4_r	128	**1079**	**208**	1007	222	2510	89.2	64	746	150	**789**	**142**	831	135
538.imagick_r	128	**296**	**1080**	278	1150	369	862	128	**296**	**1080**	278	1150	369	862
544.nab_r	128	**320**	**672**	320	674	383	563	128	**320**	**672**	320	674	383	563
549.fotonik3d_r	128	**4764**	**105**	4575	109	10486	47.6	128	**4764**	**105**	4575	109	10486	47.6
554.roms_r	128	4064	50.1	**4465**	**45.6**	9226	22.0	64	**3228**	**31.5**	3772	27.0	1878	54.1

SPECrate®2017_fp_base = 183

SPECrate®2017_fp_peak = 172

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

(Continued on next page)

General Notes (Continued)

```
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
ENERGY_PERF_BIAS_CFG mode = Maximum Performance
SNC (Sub NUMA)= Enable
KTI Prefetch= Enable
LLC Dead Line Alloc = Disable
Hyper-Threading = Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on icelake3 Sat Sep  3 03:39:37 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
       2  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 32
       siblings  : 64
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31

 From lscpu from util-linux 2.32.1:
      Architecture:        x86_64
      CPU op-mode(s):      32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
      Byte Order:            Little Endian
      CPU(s):                128
      On-line CPU(s) list:   0-127
      Thread(s) per core:    2
      Core(s) per socket:    32
      Socket(s):             2
      NUMA node(s):          4
      Vendor ID:             GenuineIntel
      BIOS Vendor ID:        Intel(R) Corporation
      CPU family:            6
      Model:                 106
      Model name:            Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
      BIOS Model name:       Intel(R) Xeon(R) Gold 6338 CPU @ 2.00GHz
      Stepping:              6
      CPU MHz:               2001.000
      CPU max MHz:           2001.0000
      CPU min MHz:           800.0000
      BogoMIPS:              4000.00
      Virtualization:        VT-x
      L1d cache:             48K
      L1i cache:             32K
      L2 cache:              1280K
      L3 cache:              49152K
      NUMA node0 CPU(s):     0-15,64-79
      NUMA node1 CPU(s):     16-31,80-95
      NUMA node2 CPU(s):     32-47,96-111
      NUMA node3 CPU(s):     48-63,112-127
      Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
      intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
      vpid ept_ad fsgsbase tsc_adjust sgx bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
      avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
      avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
      ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
      avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

/proc/cpuinfo cache data
   cache size : 49152 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
  76 77 78 79
  node 0 size: 257627 MB
  node 0 free: 240036 MB
  node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
  89 90 91 92 93 94 95
  node 1 size: 258040 MB
  node 1 free: 245364 MB
  node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
  103 104 105 106 107 108 109 110 111
  node 2 size: 258003 MB
  node 2 free: 245532 MB
  node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
  118 119 120 121 122 123 124 125 126 127
  node 3 size: 258038 MB
  node 3 free: 245473 MB
  node distances:
  node   0   1   2   3
    0:  10  11  20  20
    1:  11  10  20  20
    2:  20  20  10  11
    3:  20  20  11  10

From /proc/meminfo
   MemTotal:       1056471280 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.5 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.5"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos
```

(Continued on next page)

Platform Notes (Continued)

```
uname -a:
   Linux icelake3 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64
   x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Sep 2 11:13

SPEC is set to: /home/cpu2017
   Filesystem           Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   402G  155G  247G  39% /home

From /sys/devices/virtual/dmi/id
    Vendor:         Tyrone Systems
    Product:        Tyrone Camarero SDI100C2R-28
    Product Family: SMC X12
    Serial:         A444717X2418924

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

BIOS:
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      1.2b
   BIOS Date:         06/01/2022
   BIOS Revision:     5.22
```

(Continued on next page)

Platform Notes (Continued)

```
 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
`-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-09-02 18:09:37-0400.
Report generated on 2022-10-12 17:00:58 by CPU2017 PS formatter v6442.
Originally published on 2022-10-11.