SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECrate®2017_int_base = 555

SPECrate®2017_int_peak = 575

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2022
Hardware Availability: May-2021
Software Availability: May-2022

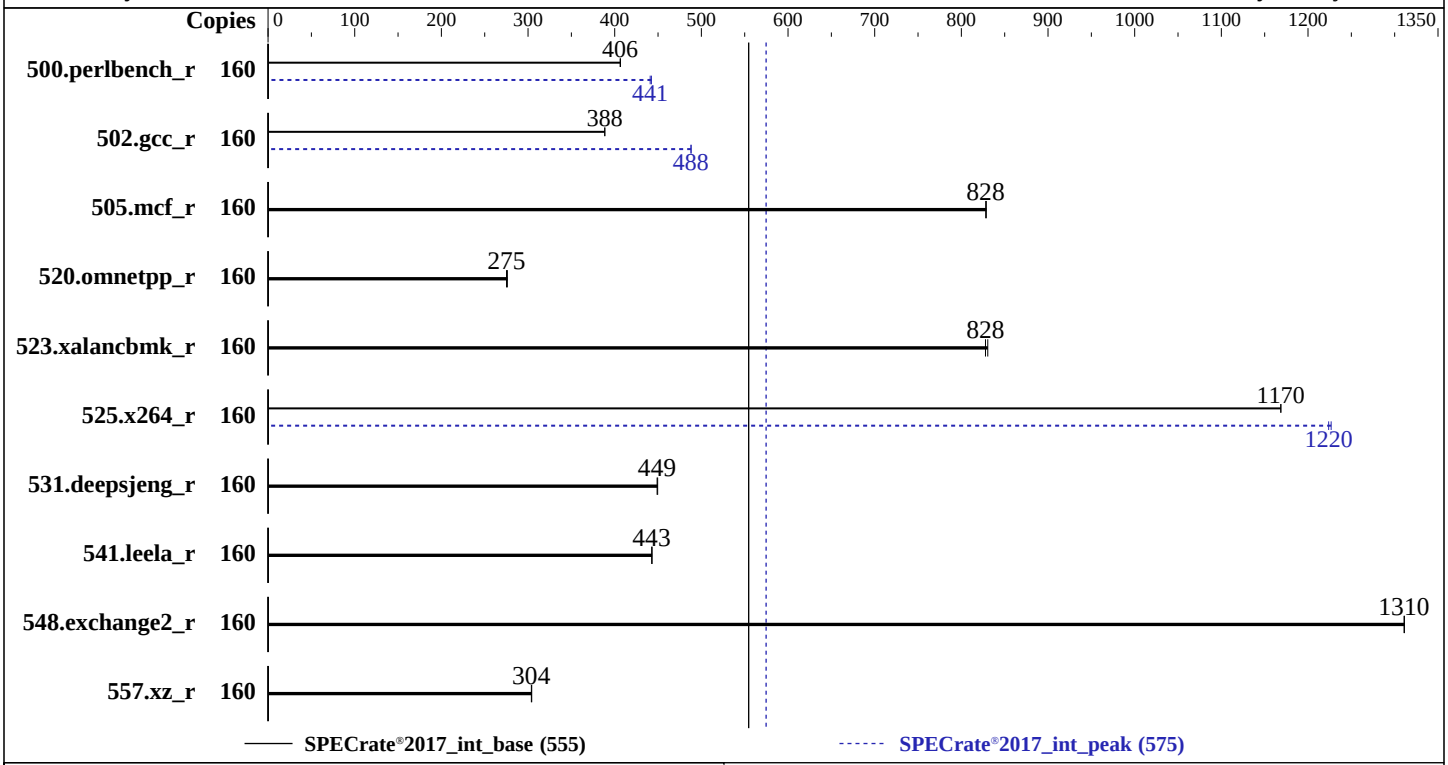

Hardware

CPU Name:	Intel Xeon Platinum 8380
Max MHz:	3400
Nominal:	2300
Enabled:	80 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R)
Storage:	100 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.6 (Ootpa) 4.18.0-372.9.1.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.6.5 released Apr-2022
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R750 (Intel Xeon Platinum 8380, 2.30 GHz)

SPECrate®2017_int_base = 555

SPECrate®2017_int_peak = 575

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2022
Hardware Availability: May-2021
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	626	407	**627**	**406**			160	576	442	**578**	**441**		
502.gcc_r	160	**583**	**388**	583	389			160	**464**	**488**	464	488		
505.mcf_r	160	312	829	**312**	**828**			160	312	829	**312**	**828**		
520.omnetpp_r	160	760	276	**763**	**275**			160	760	276	**763**	**275**		
523.xalancbmk_r	160	**204**	**828**	203	830			160	**204**	**828**	203	830		
525.x264_r	160	240	1170	**240**	**1170**			160	228	1230	**229**	**1220**		
531.deepsjeng_r	160	408	450	**408**	**449**			160	408	450	**408**	**449**		
541.leela_r	160	**599**	**443**	598	443			160	**599**	**443**	598	443		
548.exchange2_r	160	**320**	**1310**	320	1310			160	**320**	**1310**	320	1310		
557.xz_r	160	568	304	**569**	**304**			160	568	304	**569**	**304**		

SPECrate®2017_int_base = 555

SPECrate®2017_int_peak = 575

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/ia32:/mnt/ram
     disk/cpu2017-1.1.8-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 100 GB ramdisk created with the cmd: "mount -t tmpfs -o size=100G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
     Virtualization Technology : Disabled
               Sub NUMA Cluster : 2-way Clustering
                  Optmizer Mode : Enabled

                 System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                      C States : Autonomous
           Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
   CPU Interconnect Bus Link
              Power Management : Disabled
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on auvcetillem1m1.corp.emc.com Fri Oct  7 12:46:45 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
      2  "physical id"s (chips)
      160 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 40
      siblings  : 80
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
```

(Continued on next page)

Platform Notes (Continued)

```
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

  From lscpu from util-linux 2.32.1:
       Architecture:        x86_64
       CPU op-mode(s):      32-bit, 64-bit
       Byte Order:          Little Endian
       CPU(s):              160
       On-line CPU(s) list: 0-159
       Thread(s) per core:  2
       Core(s) per socket:  40
       Socket(s):           2
       NUMA node(s):        4
       Vendor ID:           GenuineIntel
       BIOS Vendor ID:      Intel
       CPU family:          6
       Model:               106
       Model name:          Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
       BIOS Model name:     Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
       Stepping:            6
       CPU MHz:             3400.000
       CPU max MHz:         3400.0000
       CPU min MHz:         800.0000
       BogoMIPS:            4600.00
       L1d cache:           48K
       L1i cache:           32K
       L2 cache:            1280K
       L3 cache:            61440K
       NUMA node0 CPU(s):
       0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108,
       112,116,120,124,128,132,136,140,144,148,152,156
       NUMA node1 CPU(s):
       2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110
       ,114,118,122,126,130,134,138,142,146,150,154,158
       NUMA node2 CPU(s):
       1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,
       113,117,121,125,129,133,137,141,145,149,153,157
       NUMA node3 CPU(s):
       3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111
       ,115,119,123,127,131,135,139,143,147,151,155,159
       Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
       pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
       aperfmperf pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr
       pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
       f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
       intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep
       bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
       clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
       cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm
       ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
       avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
       flush_l1d arch_capabilities

  /proc/cpuinfo cache data
     cache size : 61440 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

(Continued on next page)

Platform Notes (Continued)

```
  available: 4 nodes (0-3)
  node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
  100 104 108 112 116 120 124 128 132 136 140 144 148 152 156
  node 0 size: 128153 MB
  node 0 free: 125427 MB
  node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
  102 106 110 114 118 122 126 130 134 138 142 146 150 154 158
  node 1 size: 128973 MB
  node 1 free: 125313 MB
  node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
  101 105 109 113 117 121 125 129 133 137 141 145 149 153 157
  node 2 size: 129015 MB
  node 2 free: 124404 MB
  node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
  103 107 111 115 119 123 127 131 135 139 143 147 151 155 159
  node 3 size: 129003 MB
  node 3 free: 124483 MB
  node distances:
  node   0   1   2   3
    0:  10  11  20  20
    1:  11  10  20  20
    2:  20  20  10  11
    3:  20  20  11  10

From /proc/meminfo
   MemTotal:       527508996 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.6 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.6"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.6 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
   Linux auvcetillem1m1.corp.emc.com 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19
   EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
```

(Continued on next page)

Platform Notes (Continued)

```
                                                  Bypass disabled via prctl and
                                                  seccomp
 CVE-2017-5753 (Spectre variant 1):               Mitigation: usercopy/swapgs
                                                  barriers and __user pointer
                                                  sanitization
 CVE-2017-5715 (Spectre variant 2):               Mitigation: Enhanced IBRS, IBPB:
                                                  conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):         Not affected

 run-level 3 Oct 5 16:41

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  100G  3.6G   97G   4% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R750
     Product Family: PowerEdge
     Serial:         SLR7598

 Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     8x 002C00B3002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200
     2x 002C0632002C 18ASF4G72PDZ-3G2E1 32 GB 2 rank 3200
     1x 00AD063200AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200
     5x 00CE063200CE M393A4G43AB3-CWE 32 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.6.5
    BIOS Date:         04/15/2022
    BIOS Revision:     1.6

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin -lqkmalloc`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin -lqkmalloc`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin -lqkmalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`

(Continued on next page)

Peak Portability Flags (Continued)

502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.0.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-07 13:46:45-0400.
Report generated on 2024-01-29 17:08:29 by CPU2017 PS formatter v6716.
Originally published on 2022-10-25.