SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11
(2.40 GHz, AMD EPYC 9654P)

SPECrate®2017_fp_base = 666

SPECrate®2017_fp_peak = 725

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2022
Hardware Availability: Dec-2022
Software Availability: Nov-2022

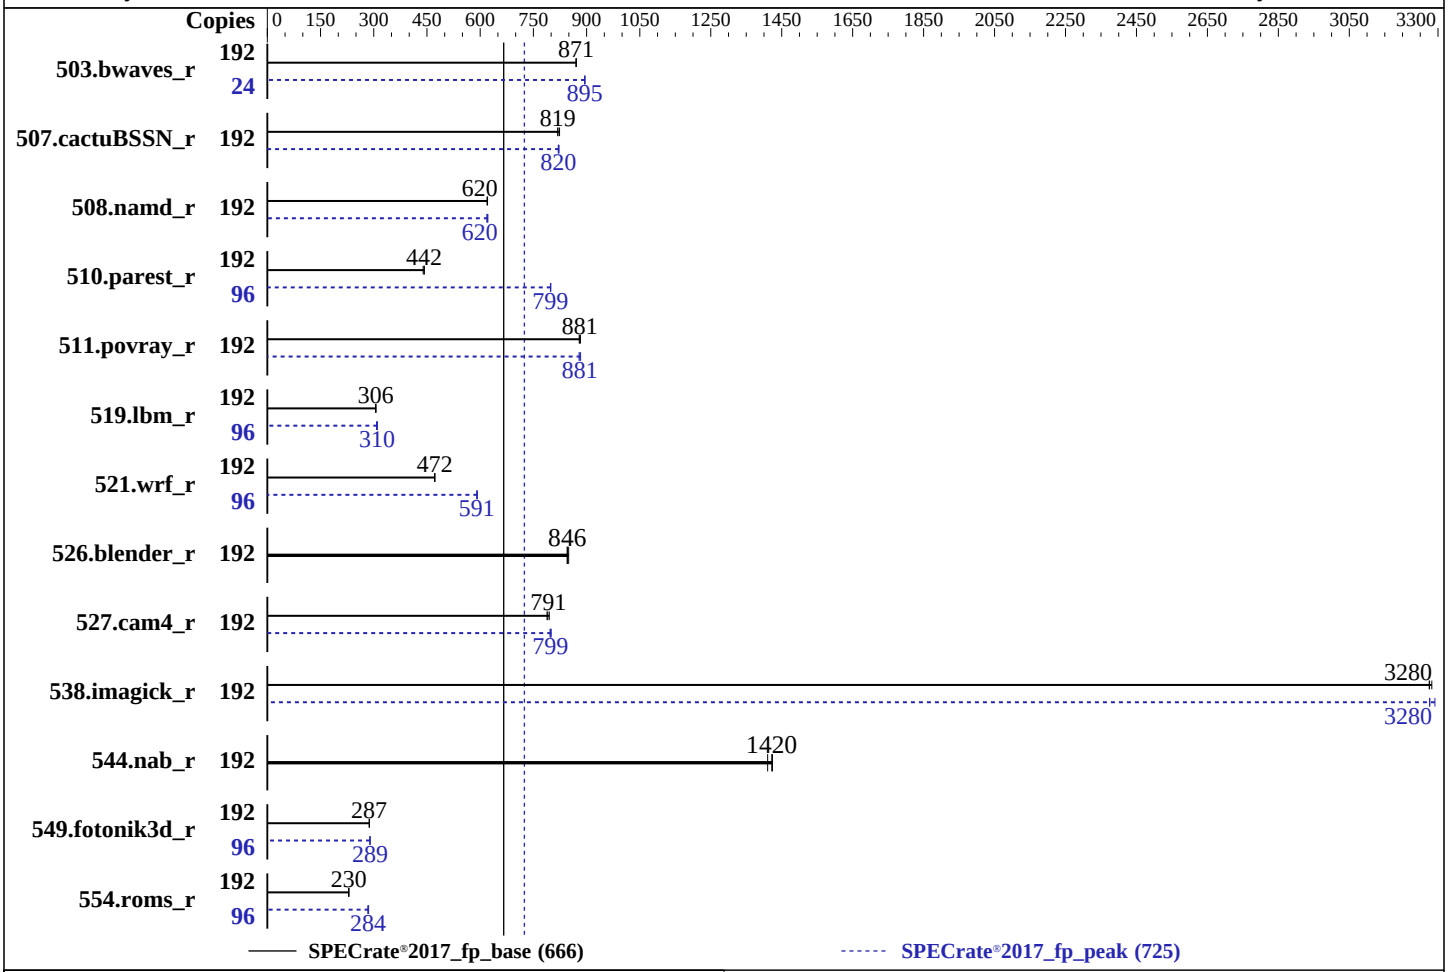

Hardware

CPU Name:	AMD EPYC 9654P
Max MHz:	3700
Nominal:	2400
Enabled:	96 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 1.6 TB NVMe SSD, RAID 0
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version v1.10 10/06/2022 released Oct-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL345 Gen11
(2.40 GHz, AMD EPYC 9654P)

SPECrate®2017_fp_base = 666

SPECrate®2017_fp_peak = 725

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Oct-2022
Hardware Availability: Dec-2022
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	2212	870	2211	871	**2211**	**871**	24	269	895	**269**	**895**	269	896
507.cactuBSSN_r	192	295	824	**297**	**819**	297	819	192	**296**	**820**	296	822	296	820
508.namd_r	192	294	620	294	621	**294**	**620**	192	**294**	**620**	295	619	293	622
510.parest_r	192	1135	442	1143	439	**1136**	**442**	96	314	799	**314**	**799**	315	798
511.povray_r	192	508	883	**509**	**881**	510	879	192	508	883	510	879	**509**	**881**
519.lbm_r	192	662	306	**662**	**306**	662	306	96	**327**	**310**	326	310	329	308
521.wrf_r	192	913	471	**912**	**472**	910	473	96	363	592	364	591	**364**	**591**
526.blender_r	192	346	845	**346**	**846**	344	849	192	346	845	**346**	**846**	344	849
527.cam4_r	192	422	795	**425**	**791**	426	788	192	420	800	**420**	**799**	421	797
538.imagick_r	192	**146**	**3280**	146	3280	145	3280	192	146	3280	145	3290	**146**	**3280**
544.nab_r	192	229	1410	227	1420	**227**	**1420**	192	229	1410	227	1420	**227**	**1420**
549.fotonik3d_r	192	2605	287	**2603**	**287**	2599	288	96	1292	290	1293	289	**1292**	**289**
554.roms_r	192	**1329**	**230**	1329	229	1328	230	96	534	285	**537**	**284**	538	284

SPECrate®2017_fp_base = 666

SPECrate®2017_fp_peak = 725

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017/amd_rate_a
     occ400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 Workload Profile set to General Throughput Compute
 Determinism Control set to Manual
  Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Four memory domains per socket
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0xa10110d for the
AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this
```

(Continued on next page)

Platform Notes (Continued)

```
ROM is version GenoaPI 1.0.0.1-L2

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Sun Oct 23 00:12:12 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 9654P 96-Core Processor
       1  "physical id"s (chips)
       192 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 96
       siblings  : 192
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
       81 82 83 84 85 86 87 88 89 90 91 92 93 94 95

 From lscpu from util-linux 2.37.4:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   52 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          192
      On-line CPU(s) list:             0-191
      Vendor ID:                       AuthenticAMD
      BIOS Vendor ID:                  Advanced Micro Devices, Inc.
      Model name:                      AMD EPYC 9654P 96-Core Processor
      BIOS Model name:                 AMD EPYC 9654P 96-Core Processor
      CPU family:                      25
      Model:                           17
      Thread(s) per core:              2
      Core(s) per socket:              96
      Socket(s):                       1
      Stepping:                        1
      Frequency boost:                 enabled
      CPU max MHz:                     3707.8120
      CPU min MHz:                     1500.0000
      BogoMIPS:                        4792.58
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
```

(Continued on next page)

Platform Notes (Continued)

```
      aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
      avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
      rdpid overflow_recov succor smca fsrm flush_l1d
      Virtualization:                  AMD-V
      L1d cache:                       3 MiB (96 instances)
      L1i cache:                       3 MiB (96 instances)
      L2 cache:                        96 MiB (96 instances)
      L3 cache:                        384 MiB (12 instances)
      NUMA node(s):                    12
      NUMA node0 CPU(s):               0-7,96-103
      NUMA node1 CPU(s):               8-15,104-111
      NUMA node2 CPU(s):               16-23,112-119
      NUMA node3 CPU(s):               24-31,120-127
      NUMA node4 CPU(s):               32-39,128-135
      NUMA node5 CPU(s):               40-47,136-143
      NUMA node6 CPU(s):               48-55,144-151
      NUMA node7 CPU(s):               56-63,152-159
      NUMA node8 CPU(s):               64-71,160-167
      NUMA node9 CPU(s):               72-79,168-175
      NUMA node10 CPU(s):              80-87,176-183
      NUMA node11 CPU(s):              88-95,184-191
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW,
      STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       3M    8 Data            1    64        1             64
      L1i       32K       3M    8 Instruction     1    64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
      L2          1M       96M     8 Unified          2   2048         1              64
      L3         32M      384M    16 Unified          3  32768         1              64

  /proc/cpuinfo cache data
     cache size : 1024 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 12 nodes (0-11)
    node 0 cpus: 0 1 2 3 4 5 6 7 96 97 98 99 100 101 102 103
    node 0 size: 32006 MB
    node 0 free: 31434 MB
    node 1 cpus: 8 9 10 11 12 13 14 15 104 105 106 107 108 109 110 111
    node 1 size: 32252 MB
    node 1 free: 31708 MB
    node 2 cpus: 16 17 18 19 20 21 22 23 112 113 114 115 116 117 118 119
    node 2 size: 32252 MB
    node 2 free: 31660 MB
    node 3 cpus: 24 25 26 27 28 29 30 31 120 121 122 123 124 125 126 127
    node 3 size: 32216 MB
    node 3 free: 31665 MB
    node 4 cpus: 32 33 34 35 36 37 38 39 128 129 130 131 132 133 134 135
    node 4 size: 32252 MB
    node 4 free: 31525 MB
    node 5 cpus: 40 41 42 43 44 45 46 47 136 137 138 139 140 141 142 143
    node 5 size: 32252 MB
    node 5 free: 31713 MB
    node 6 cpus: 48 49 50 51 52 53 54 55 144 145 146 147 148 149 150 151
    node 6 size: 32252 MB
    node 6 free: 31716 MB
    node 7 cpus: 56 57 58 59 60 61 62 63 152 153 154 155 156 157 158 159
    node 7 size: 32252 MB
    node 7 free: 31712 MB
    node 8 cpus: 64 65 66 67 68 69 70 71 160 161 162 163 164 165 166 167
    node 8 size: 32252 MB
    node 8 free: 31617 MB
    node 9 cpus: 72 73 74 75 76 77 78 79 168 169 170 171 172 173 174 175
    node 9 size: 32193 MB
    node 9 free: 31661 MB
    node 10 cpus: 80 81 82 83 84 85 86 87 176 177 178 179 180 181 182 183
    node 10 size: 32252 MB
    node 10 free: 31707 MB
    node 11 cpus: 88 89 90 91 92 93 94 95 184 185 186 187 188 189 190 191
    node 11 size: 32252 MB
    node 11 free: 31699 MB
    node distances:
    node   0   1   2   3   4   5   6   7   8   9  10  11
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  12  12  12  11  12  12  12  11  12  12  12
     1:  12  10  12  12  12  11  12  12  12  11  12  12
     2:  12  12  10  12  12  12  11  12  12  12  11  12
     3:  12  12  12  10  12  12  12  11  12  12  12  11
     4:  11  12  12  12  10  12  12  12  11  12  12  12
     5:  12  11  12  12  12  10  12  12  12  11  12  12
     6:  12  12  11  12  12  12  10  12  12  12  11  12
     7:  12  12  12  11  12  12  12  10  12  12  12  11
     8:  11  12  12  12  11  12  12  12  10  12  12  12
     9:  12  11  12  12  12  11  12  12  12  10  12  12
    10:  12  12  11  12  12  12  11  12  12  12  10  12
    11:  12  12  12  11  12  12  12  11  12  12  12  10

  From /proc/meminfo
     MemTotal:       395968312 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux"
        VERSION="9.0 (Plow)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="9.0"
        PLATFORM_ID="platform:el9"
        PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
        ANSI_COLOR="0;31"
     redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
     system-release: Red Hat Enterprise Linux release 9.0 (Plow)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

  uname -a:
     Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
     12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                    Not affected
  CVE-2018-3620 (L1 Terminal Fault):                 Not affected
  Microarchitectural Data Sampling:                  Not affected
  CVE-2017-5754 (Meltdown):                          Not affected
  CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                     Bypass disabled via prctl
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2017-5753 (Spectre variant 1):                    Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Retpolines, IBPB:
                                                       conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 Oct 22 13:38

 SPEC is set to: /home/cpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.4T   16G  1.4T   2% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         HPE
     Product:        ProLiant DL345 Gen11
     Product Family: ProLiant
     Serial:         DL3x5GEN11

 Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     6x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800
     2x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800
     4x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       HPE
    BIOS Version:      1.10
    BIOS Date:         10/06/2022
    BIOS Revision:     1.10
    Firmware Revision: 1.10

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Benchmarks using both C and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc`

538.imagick_r: `Same as 519.lbm_r`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc`

510.parest_r: `-m64 -flto -Wl,-mllvm -Wl,-suppress-fmas -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc`

Fortran benchmarks:

503.bwaves_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc -lflang`

549.fotonik3d_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee`

(Continued on next page)

Peak Optimization Flags (Continued)

549.fotonik3d_r (continued):
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang

554.roms_r: Same as 503.bwaves_r

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc

526.blender_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -faggressive-loop-transform -fvector-transform
-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.html
http://www.spec.org/cpu2017/flags/aocc400-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.0.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-22 14:42:11-0400.
Report generated on 2022-11-10 14:46:16 by CPU2017 PS formatter v6442.
Originally published on 2022-11-10.