SPEC CPU®2017 Integer Rate Result

Fujitsu

PRIMERGY RX2540 M6, Intel Xeon Gold 6334, 3.60GHz

SPECrate®2017_int_base = 152

SPECrate®2017_int_peak = Not Run

CPU2017 License:	19	**Test Date:**	Oct-2022
Test Sponsor:	Fujitsu	**Hardware Availability:**	Aug-2021
Tested by:	Fujitsu	**Software Availability:**	Jul-2022

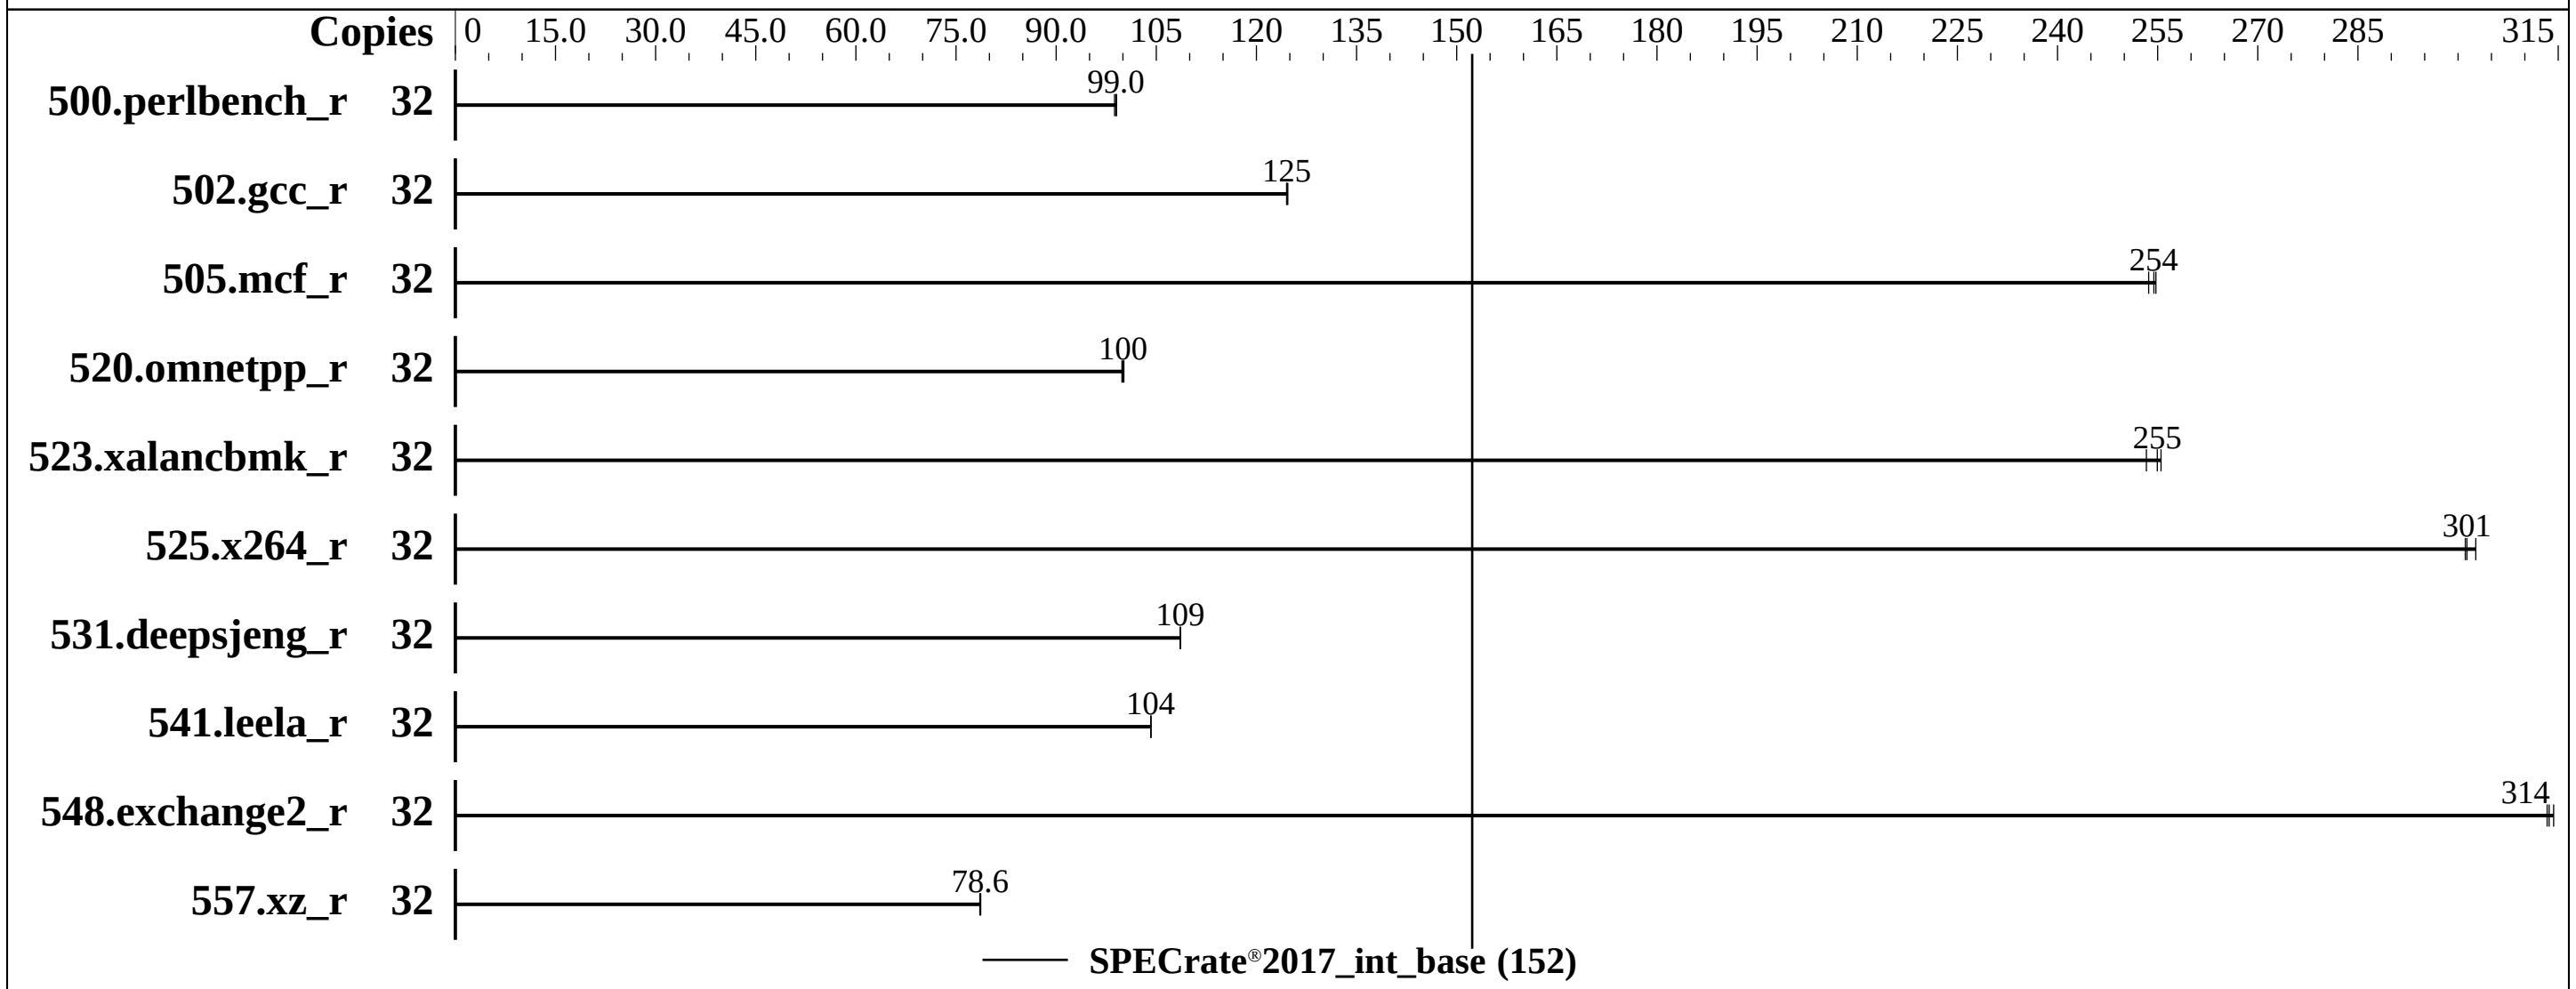

Hardware

CPU Name:	Intel Xeon Gold 6334
Max MHz:	3700
Nominal:	3600
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	18 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x SATA M.2 SSD, 480GB
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Fujitsu BIOS Version V1.0.0.0 R1.16.0 for D3891-B1x. Released Aug-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Fujitsu
PRIMERGY RX2540 M6, Intel Xeon Gold 6334, 3.60GHz

SPECrate®2017_int_base = 152
SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Oct-2022
Hardware Availability: Aug-2021
Software Availability: Jul-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	514	99.0	**515**	**99.0**	516	98.7							
502.gcc_r	32	363	125	364	125	**364**	**125**							
505.mcf_r	32	204	254	**203**	**254**	203	255							
520.omnetpp_r	32	420	99.9	419	100	**420**	**100**							
523.xalancbmk_r	32	**133**	**255**	132	256	133	253							
525.x264_r	32	185	303	**186**	**301**	186	301							
531.deepsjeng_r	32	**338**	**109**	338	109	338	109							
541.leela_r	32	**509**	**104**	509	104	509	104							
548.exchange2_r	32	**267**	**314**	267	314	268	313							
557.xz_r	32	**440**	**78.6**	440	78.6	439	78.7							

SPECrate®2017_int_base = 152
SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-31
cpupower -c all frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu202201/lib/intel64:/home/Benchmark/speccpu202201/lib/ia32:/home/Benchmark/spec
     cpu202201/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
DCU Streamer Prefetcher = Disabled
CPU C1E Support = Disabled
Package C State Limit = C2
UPI Link Frequency Select = 10.4 GT/s
XPT Prefetch = Enabled
LLC Prefetch = Enabled
UPI Prefetch = Disabled
FAN Control = Full

Sysinfo program /home/Benchmark/speccpu202201/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Thu Oct 20 04:41:02 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
      2  "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              32
     On-line CPU(s) list: 0-31
     Thread(s) per core:  2
     Core(s) per socket:  8
     Socket(s):           2
     NUMA node(s):        4
     Vendor ID:           GenuineIntel
     CPU family:          6
     Model:               106
```

(Continued on next page)

Platform Notes (Continued)

```
     Model name:          Intel(R) Xeon(R) Gold 6334 CPU @ 3.60GHz
     Stepping:            6
     CPU MHz:             3583.400
     CPU max MHz:         3700.0000
     CPU min MHz:         800.0000
     BogoMIPS:            7200.00
     Virtualization:      VT-x
     L1d cache:           48K
     L1i cache:           32K
     L2 cache:            1280K
     L3 cache:            18432K
     NUMA node0 CPU(s):   0-3,16-19
     NUMA node1 CPU(s):   4-7,20-23
     NUMA node2 CPU(s):   8-11,24-27
     NUMA node3 CPU(s):   12-15,28-31
     Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
     pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
     lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
     aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
     xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
     avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd
     mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase
     tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
     rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
     avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
     hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
     avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
     arch_capabilities

/proc/cpuinfo cache data
   cache size : 18432 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0 1 2 3 16 17 18 19
  node 0 size: 257308 MB
  node 0 free: 256913 MB
  node 1 cpus: 4 5 6 7 20 21 22 23
  node 1 size: 258045 MB
  node 1 free: 257670 MB
  node 2 cpus: 8 9 10 11 24 25 26 27
  node 2 size: 258018 MB
  node 2 free: 257785 MB
  node 3 cpus: 12 13 14 15 28 29 30 31
  node 3 size: 258043 MB
  node 3 free: 257765 MB
  node distances:
  node   0   1   2   3
    0:  10  11  20  20
    1:  11  10  20  20
    2:  20  20  10  11
    3:  20  20  11  10

From /proc/meminfo
   MemTotal:       1056170056 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB
```

(Continued on next page)

Platform Notes (Continued)

```
/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.2 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.2"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga

uname -a:
   Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): No status reported
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 Oct 20 04:39

SPEC is set to: /home/Benchmark/speccpu202201
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   392G   51G  341G  13% /home

From /sys/devices/virtual/dmi/id
    Vendor:         FUJITSU
    Product:        PRIMERGY RX2540 M6
    Product Family: SERVER
    Serial:         EWAAxxxxxx

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    32x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200
```

(Continued on next page)

Platform Notes (Continued)

```
BIOS:
   BIOS Vendor:       FUJITSU
   BIOS Version:      V1.0.0.0 R1.16.0 for D3891-B1x
   BIOS Date:         07/19/2022
   BIOS Revision:     1.16
   Firmware Revision: 3.33

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`

(Continued on next page)

Fujitsu
PRIMERGY RX2540 M6, Intel Xeon Gold 6334, 3.60GHz

SPECrate®2017_int_base = 152
SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Oct-2022
Hardware Availability: Aug-2021
Software Availability: Jul-2022

Base Portability Flags (Continued)

520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ICL-RevB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-ICL-RevB.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-10-20 04:41:02-0400.
Report generated on 2024-01-29 17:08:46 by CPU2017 PS formatter v6716.
Originally published on 2022-11-08.