SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2022
Hardware Availability: Feb-2023
Software Availability: Jun-2022

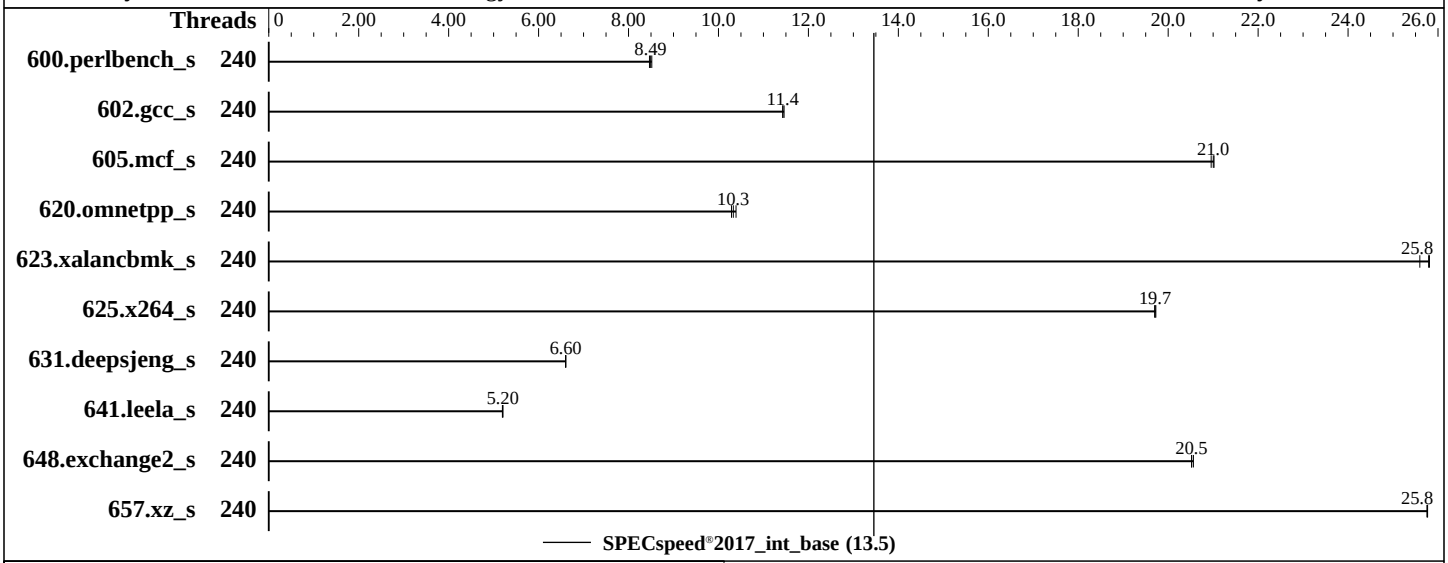

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	120 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64) Kernel 5.14.21-150400.22-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Lenovo BIOS Version USE109H 1.12 released Nov-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2022
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	240	210	8.47	**209**	**8.49**	208	8.52							
602.gcc_s	240	**348**	**11.4**	348	11.5	348	11.4							
605.mcf_s	240	225	21.0	225	21.0	**225**	**21.0**							
620.omnetpp_s	240	159	10.3	157	10.4	**158**	**10.3**							
623.xalancbmk_s	240	55.4	25.6	54.9	25.8	**54.9**	**25.8**							
625.x264_s	240	89.5	19.7	89.4	19.7	**89.5**	**19.7**							
631.deepsjeng_s	240	217	6.60	**217**	**6.60**	217	6.60							
641.leela_s	240	328	5.20	**328**	**5.20**	328	5.20							
648.exchange2_s	240	143	20.5	**143**	**20.5**	143	20.6							
657.xz_s	240	240	25.8	240	25.8	**240**	**25.8**							

SPECspeed®2017_int_base = 13.5

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.8-ic2022.1/lib/intel64:/home/cpu2017-1.1.8-ic2022.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Custom Mode
CPU P-state Control set to Cooperative with Legacy
SNC set to SNC4

 Sysinfo program /home/cpu2017-1.1.8-ic2022.1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost Mon Dec  5 11:28:37 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8490H
       2  "physical id"s (chips)
       240 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 60
       siblings  : 120
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
       53 54 55 56 57 58 59

 From lscpu from util-linux 2.37.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   46 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          240
      On-line CPU(s) list:             0-239
      Vendor ID:                       GenuineIntel
      Model name:                      Intel(R) Xeon(R) Platinum 8490H
      CPU family:                      6
      Model:                           143
      Thread(s) per core:              2
      Core(s) per socket:              60
      Socket(s):                       2
      Stepping:                        6
      CPU max MHz:                     3500.0000
      CPU min MHz:                     800.0000
```

(Continued on next page)

Platform Notes (Continued)

```
      BogoMIPS:                        3800.00
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
      smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
      hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2
      gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
      bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
      pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
      Virtualization:                  VT-x
      L1d cache:                       5.6 MiB (120 instances)
      L1i cache:                       3.8 MiB (120 instances)
      L2 cache:                        240 MiB (120 instances)
      L3 cache:                        225 MiB (2 instances)
      NUMA node(s):                    8
      NUMA node0 CPU(s):               0-14,120-134
      NUMA node1 CPU(s):               15-29,135-149
      NUMA node2 CPU(s):               30-44,150-164
      NUMA node3 CPU(s):               45-59,165-179
      NUMA node4 CPU(s):               60-74,180-194
      NUMA node5 CPU(s):               75-89,195-209
      NUMA node6 CPU(s):               90-104,210-224
      NUMA node7 CPU(s):               105-119,225-239
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
      filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     5.6M   12 Data            1     64        1             64
      L1i       32K     3.8M    8 Instruction     1     64        1             64
      L2         2M     240M   16 Unified         2   2048        1             64
      L3     112.5M     225M   15 Unified         3 122880        1             64

  /proc/cpuinfo cache data
     cache size : 115200 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129
    130 131 132 133 134
    node 0 size: 64167 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 free: 63618 MB
  node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141
  142 143 144 145 146 147 148 149
  node 1 size: 64504 MB
  node 1 free: 64274 MB
  node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156
  157 158 159 160 161 162 163 164
  node 2 size: 64469 MB
  node 2 free: 64251 MB
  node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171
  172 173 174 175 176 177 178 179
  node 3 size: 64504 MB
  node 3 free: 64289 MB
  node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186
  187 188 189 190 191 192 193 194
  node 4 size: 64504 MB
  node 4 free: 64023 MB
  node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201
  202 203 204 205 206 207 208 209
  node 5 size: 64504 MB
  node 5 free: 64260 MB
  node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215
  216 217 218 219 220 221 222 223 224
  node 6 size: 64504 MB
  node 6 free: 63890 MB
  node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227
  228 229 230 231 232 233 234 235 236 237 238 239
  node 7 size: 64457 MB
  node 7 free: 63870 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

From /proc/meminfo
   MemTotal:       527992256 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP4"
      VERSION_ID="15.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
   Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
   UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                        Not affected
 CVE-2018-3620 (L1 Terminal Fault):                     Not affected
 Microarchitectural Data Sampling:                      Not affected
 CVE-2017-5754 (Meltdown):                              Not affected
 CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                        Bypass disabled via prctl and
                                                        seccomp
 CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                        barriers and __user pointer
                                                        sanitization
 CVE-2017-5715 (Spectre variant 2):                     Mitigation: Enhanced IBRS, IBPB:
                                                        conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 3 Dec 5 11:26

 SPEC is set to: /home/cpu2017-1.1.8-ic2022.1
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda3      xfs   889G   24G  865G   3% /

 From /sys/devices/virtual/dmi/id
     Vendor:         Lenovo
     Product:        ThinkSystem SD650 V3
     Product Family: ThinkSystem
     Serial:         123456789

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     4x Hynix HMCG88AEBRA115N 32 GB 2 rank 4800
     12x Hynix HMCG88AEBRA173N 32 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       Lenovo
    BIOS Version:      USE109H-1.12
    BIOS Date:         11/29/2022
    BIOS Revision:     1.12
    Firmware Revision: 0.90

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
----------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
----------------------------------------------------------------------------------------------

==============================================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.html
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.xml
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-04 22:28:37-0500.
Report generated on 2024-01-29 17:14:54 by CPU2017 PS formatter v6716.
Originally published on 2023-01-10.