SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECrate®2017_fp_base = 898

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Dec-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

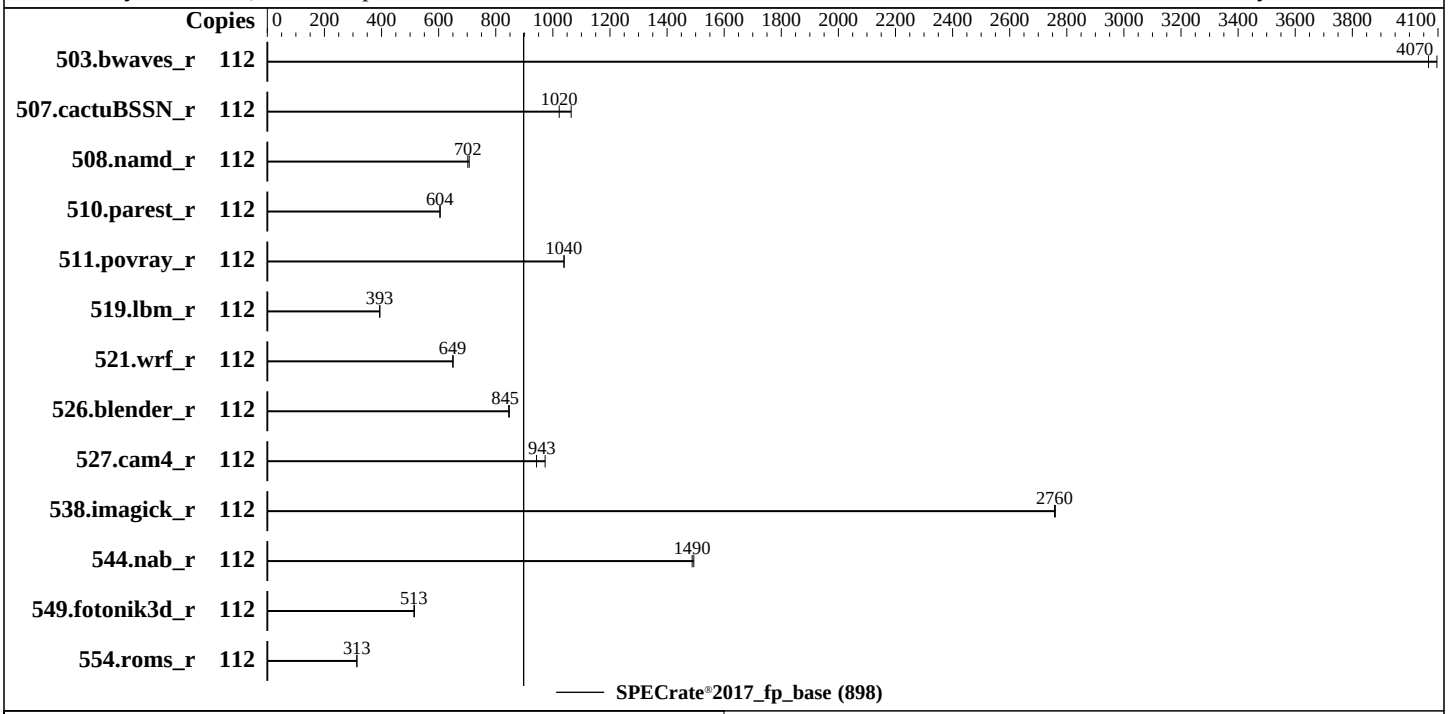

Hardware

CPU Name:	Intel Xeon Platinum 8480+
Max MHz:	3800
Nominal:	2000
Enabled:	112 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 7.68 TB PCIe 4.0x4 NVMe SSD
Other:	None

Software

OS:	Ubuntu 22.04.1 LTS 5.15.0-16-generic
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 3A10 released Nov-2022
File System:	ext4
System State:	Run level 5
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

D54Q-2U (Intel Xeon Platinum 8480+, 2.0GHz)

SPECrate®2017_fp_base = 898

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Dec-2022
Hardware Availability: Nov-2022
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	274	4100	**276**	**4070**									
507.cactuBSSN_r	112	133	1060	**139**	**1020**									
508.namd_r	112	150	707	**152**	**702**									
510.parest_r	112	484	606	**485**	**604**									
511.povray_r	112	252	1040	**252**	**1040**									
519.lbm_r	112	299	394	**300**	**393**									
521.wrf_r	112	385	651	**386**	**649**									
526.blender_r	112	201	848	**202**	**845**									
527.cam4_r	112	201	973	**208**	**943**									
538.imagick_r	112	101	2760	**101**	**2760**									
544.nab_r	112	126	1490	**127**	**1490**									
549.fotonik3d_r	112	**850**	**513**	847	515									
554.roms_r	112	567	314	**568**	**313**									

SPECrate®2017_fp_base = 898

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration
Intel VT for Directed I/O set to Disabled
Patrol Scrub set to Disabled
SNC set to SNC4
DCU Streamer Prefetcher set to Disabled
Hardware P-States set to Out Of Band Mode
Enable LP [Global] set to Single LP

 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on quanta Sun Dec  4 12:16:33 2022

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -a
   Linux quanta 5.15.0-56-generic #62-Ubuntu SMP Tue Nov 22 19:54:14 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
 2. w
    12:16:33 up 1 min,  1 user,  load average: 0.61, 0.22, 0.08
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                12:15    7.00s  0.91s  0.03s /bin/bash ./S6Qtest.sh

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   time(seconds)        unlimited
   file(blocks)         unlimited
   data(kbytes)         unlimited
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 132050896
   process              4126146
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

------------------------------------------------------------
 5. sysinfo process ancestry
  /sbin/init
  /bin/login -f
  -bash
  /bin/bash ./S6Qtest.sh
  /bin/bash ./S6Qtest.sh
```

(Continued on next page)

Platform Notes (Continued)

```
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=56 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base -o all fprate -n 2
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=56 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --iterations 2
   --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.024/templogs/preenv.fprate.024.0.log --lognum 024.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8480+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0000c0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 56
    siblings        : 56
    2 physical ids (chips)
    112 processors (hardware threads)
    physical id 0: core ids 0-55
    physical id 1: core ids 0-55
    physical id 0: apicids
   0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110
    physical id 1: apicids
   128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
   80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
    2,234,236,238
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          112
  On-line CPU(s) list:             0-111
  Vendor ID:                       GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
Model name:                      Intel(R) Xeon(R) Platinum 8480+
CPU family:                      6
Model:                           143
Thread(s) per core:              1
Core(s) per socket:              56
Socket(s):                       2
Stepping:                        8
BogoMIPS:                        4000.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                 tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                                 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                 cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                 arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                 vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                 bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                 tsxldtrk pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                 arch_capabilities
Virtualization:                  VT-x
L1d cache:                       5.3 MiB (112 instances)
L1i cache:                       3.5 MiB (112 instances)
L2 cache:                        224 MiB (112 instances)
L3 cache:                        210 MiB (2 instances)
NUMA node(s):                    8
NUMA node0 CPU(s):               0-13
NUMA node1 CPU(s):               14-27
NUMA node2 CPU(s):               28-41
NUMA node3 CPU(s):               42-55
NUMA node4 CPU(s):               56-69
NUMA node5 CPU(s):               70-83
NUMA node6 CPU(s):               84-97
NUMA node7 CPU(s):               98-111
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Mmio stale data:   Not affected
Vulnerability Retbleed:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v1:       Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:       Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                  sequence
   Vulnerability Srbds:           Not affected
   Vulnerability Tsx async abort: Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.3M   12 Data            1     64        1             64
     L1i       32K     3.5M    8 Instruction     1     64        1             64
     L2         2M     224M   16 Unified         2   2048        1             64
     L3       105M     210M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-13
  node 0 size: 128545 MB
  node 0 free: 127830 MB
  node 1 cpus: 14-27
  node 1 size: 129020 MB
  node 1 free: 128596 MB
  node 2 cpus: 28-41
  node 2 size: 129020 MB
  node 2 free: 128573 MB
  node 3 cpus: 42-55
  node 3 size: 129020 MB
  node 3 free: 128577 MB
  node 4 cpus: 56-69
  node 4 size: 129020 MB
  node 4 free: 128771 MB
  node 5 cpus: 70-83
  node 5 size: 128985 MB
  node 5 free: 128713 MB
  node 6 cpus: 84-97
  node 6 size: 129020 MB
  node 6 free: 128770 MB
  node 7 cpus: 98-111
  node 7 size: 129014 MB
  node 7 free: 128601 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
     4:  21  21  21  21  10  12  12  12
     5:  21  21  21  21  12  10  12  12
     6:  21  21  21  21  12  12  10  12
     7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056407168 kB

------------------------------------------------------------
10. who -r
  run-level 5 Dec 4 12:15

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled           ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                    cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                    grub-common irqbalance keyboard-setup lvm2-monitor lxd-agent multipathd
                    networkd-dispatcher open-iscsi open-vm-tools pollinate rpcbind rsyslog secureboot-db
                    setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                    systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                    ufw unattended-upgrades vgauth
  enabled-runtime   netplan-ovs-cleanup rc-local systemd-fsck-root systemd-remount-fs
  disabled          console-getty debug-shell grub-initrd-fallback ipmievd iscsid nftables rsync serial-getty@
                    sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                    systemd-time-wait-sync upower
  generated         apport cpufrequtils loadcpufreq openipmi
  indirect          uuidd
  masked            cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot nfs-common rc rcS
                    screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-56-generic
  root=UUID=3fb9636c-5076-4302-a065-9aaccf1a50e3
  ro
  pcie_aspm=off

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
```

(Continued on next page)

Platform Notes (Continued)

```
     Unable to determine current policy
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: balanced

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.1 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /root/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 ext4  7.0T   87G  6.5T   2% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid D54Q-2U

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Micron MTC40F2046S1RC48BA1 64 GB 2 rank 4800
     16x NO DIMM NO DIMM


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      3A10
   BIOS Date:         11/23/2022
   BIOS Revision:     5.29
   Firmware Revision: 3.8
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-Eagle_Stream-Platform-Settings-V1.1.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-12-04 07:16:33-0500.
Report generated on 2023-01-10 18:59:43 by CPU2017 PS formatter v6442.
Originally published on 2023-01-10.