SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SSG-121E-NES24R
(X13DSF-A , Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 646

SPECrate®2017_fp_peak = 663

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: Jun-2022

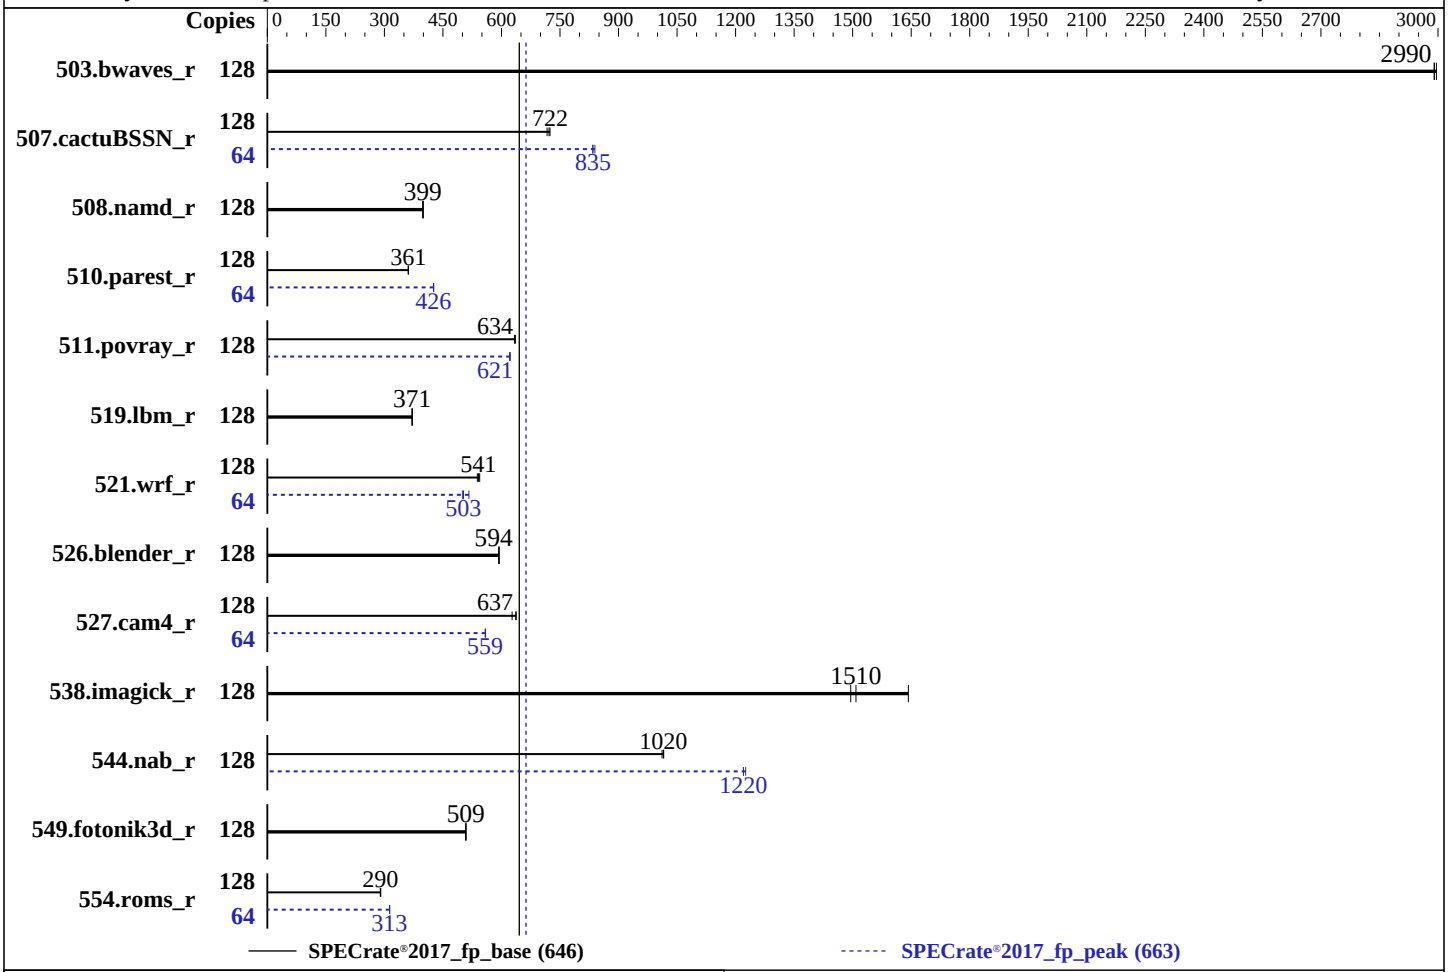

Hardware

CPU Name:	Intel Xeon Platinum 8454H
Max MHz:	3400
Nominal:	2100
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	82.5 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 480 GB NVMe SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 Kernel 5.14.21-150400.22-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.0 released Nov-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

SuperServer SSG-121E-NES24R
(X13DSF-A , Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 646

SPECrate®2017_fp_peak = 663

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	429	2990	**429**	**2990**	428	3000	128	429	2990	**429**	**2990**	428	3000
507.cactuBSSN_r	128	**224**	**722**	226	717	224	724	64	97.2	834	96.5	839	**97.1**	**835**
508.namd_r	128	304	400	**305**	**399**	305	398	128	304	400	**305**	**399**	305	398
510.parest_r	128	927	361	**927**	**361**	926	362	64	393	426	**393**	**426**	393	426
511.povray_r	128	**471**	**634**	470	635	472	634	128	481	621	480	622	**481**	**621**
519.lbm_r	128	364	371	363	371	**363**	**371**	128	364	371	363	371	**363**	**371**
521.wrf_r	128	527	544	**530**	**541**	533	538	64	278	517	286	501	**285**	**503**
526.blender_r	128	**328**	**594**	328	594	328	594	128	**328**	**594**	328	594	328	594
527.cam4_r	128	351	638	357	627	**352**	**637**	64	200	559	**200**	**559**	200	558
538.imagick_r	128	194	1640	213	1500	**211**	**1510**	128	194	1640	213	1500	**211**	**1510**
544.nab_r	128	213	1010	212	1020	**212**	**1020**	128	177	1220	**177**	**1220**	176	1230
549.fotonik3d_r	128	981	509	980	509	**981**	**509**	128	981	509	980	509	**981**	**509**
554.roms_r	128	700	291	703	289	**701**	**290**	64	324	314	**325**	**313**	325	313

SPECrate®2017_fp_base = 646

SPECrate®2017_fp_peak = 663

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
DCU Streamer Prefetcher = Disable
SNC = Enable SNC4 (4-clusters)
LLC Dead Line Alloc = Disable
KTI Prefetch = Enable
Stale AtoS = Disable
Patrol Scrub = Disable

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on 135-179-217 Fri Dec  2 20:32:12 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8454H
       2  "physical id"s (chips)
       128 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 32
       siblings  : 64
       physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
       25 26 27 28 29 30 31
       physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
```

(Continued on next page)

Platform Notes (Continued)

```
       25 26 27 28 29 30 31

 From lscpu from util-linux 2.37.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   46 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          128
      On-line CPU(s) list:             0-127
      Vendor ID:                       GenuineIntel
      Model name:                      Intel(R) Xeon(R) Platinum 8454H
      CPU family:                      6
      Model:                           143
      Thread(s) per core:              2
      Core(s) per socket:              32
      Socket(s):                       2
      Stepping:                        8
      Frequency boost:                 enabled
      CPU max MHz:                     2101.0000
      CPU min MHz:                     800.0000
      BogoMIPS:                        4200.00
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
      smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
      umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
      tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd
      fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d
      arch_capabilities
      Virtualization:                  VT-x
      L1d cache:                       3 MiB (64 instances)
      L1i cache:                       2 MiB (64 instances)
      L2 cache:                        128 MiB (64 instances)
      L3 cache:                        165 MiB (2 instances)
      NUMA node(s):                    8
      NUMA node0 CPU(s):               0-7,64-71
      NUMA node1 CPU(s):               8-15,72-79
      NUMA node2 CPU(s):               16-23,80-87
      NUMA node3 CPU(s):               24-31,88-95
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node4 CPU(s):                32-39,96-103
      NUMA node5 CPU(s):                40-47,104-111
      NUMA node6 CPU(s):                48-55,112-119
      NUMA node7 CPU(s):                56-63,120-127
      Vulnerability Itlb multihit:      Not affected
      Vulnerability L1tf:               Not affected
      Vulnerability Mds:                Not affected
      Vulnerability Meltdown:           Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:         Mitigation; Enhanced IBRS, IBPB conditional, RSB
      filling
      Vulnerability Srbds:              Not affected
      Vulnerability Tsx async abort:    Not affected

  From lscpu --cache:
       NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
       L1d       48K       3M   12 Data            1    64        1             64
       L1i       32K       2M    8 Instruction     1    64        1             64
       L2         2M     128M   16 Unified         2  2048        1             64
       L3      82.5M     165M   15 Unified         3 90112        1             64

  /proc/cpuinfo cache data
     cache size : 84480 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
    node 0 size: 64146 MB
    node 0 free: 52969 MB
    node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
    node 1 size: 64507 MB
    node 1 free: 57915 MB
    node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
    node 2 size: 64507 MB
    node 2 free: 57876 MB
    node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
    node 3 size: 64473 MB
    node 3 free: 57939 MB
    node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
    node 4 size: 64507 MB
    node 4 free: 57966 MB
    node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
    node 5 size: 64507 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 5 free: 57876 MB
   node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
   node 6 size: 64507 MB
   node 6 free: 57974 MB
   node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
   node 7 size: 64460 MB
   node 7 free: 57521 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  21  21  21  21
     1:  12  10  12  12  21  21  21  21
     2:  12  12  10  12  21  21  21  21
     3:  12  12  12  10  21  21  21  21
     4:  21  21  21  21  10  12  12  12
     5:  21  21  21  21  12  10  12  12
     6:  21  21  21  21  12  12  10  12
     7:  21  21  21  21  12  12  12  10

 From /proc/meminfo
    MemTotal:       527995576 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
    ondemand

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15-SP4"
       VERSION_ID="15.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
       ID="sles"
       ID_LIKE="suse"
       ANSI_COLOR="0;32"
       CPE_NAME="cpe:/o:suse:sles:15:sp4"

 uname -a:
    Linux 135-179-217 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
    UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):                       Not affected
 Microarchitectural Data Sampling:                        Not affected
 CVE-2017-5754 (Meltdown):                                Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2018-3639 (Speculative Store Bypass):             Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
 CVE-2017-5753 (Spectre variant 1):                    Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
 CVE-2017-5715 (Spectre variant 2):                   Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 Dec 2 13:45

 SPEC is set to: /home/cpu2017
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p2 xfs   445G   59G  387G  14% /

 From /sys/devices/virtual/dmi/id
     Vendor:         Supermicro
     Product:        Super Server
     Product Family: Family
     Serial:         0123456789

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      1.0
    BIOS Date:         11/29/2022
    BIOS Revision:     5.29

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-02 07:32:12-0500.
Report generated on 2023-01-10 19:00:06 by CPU2017 PS formatter v6442.
Originally published on 2023-01-10.