



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176


Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

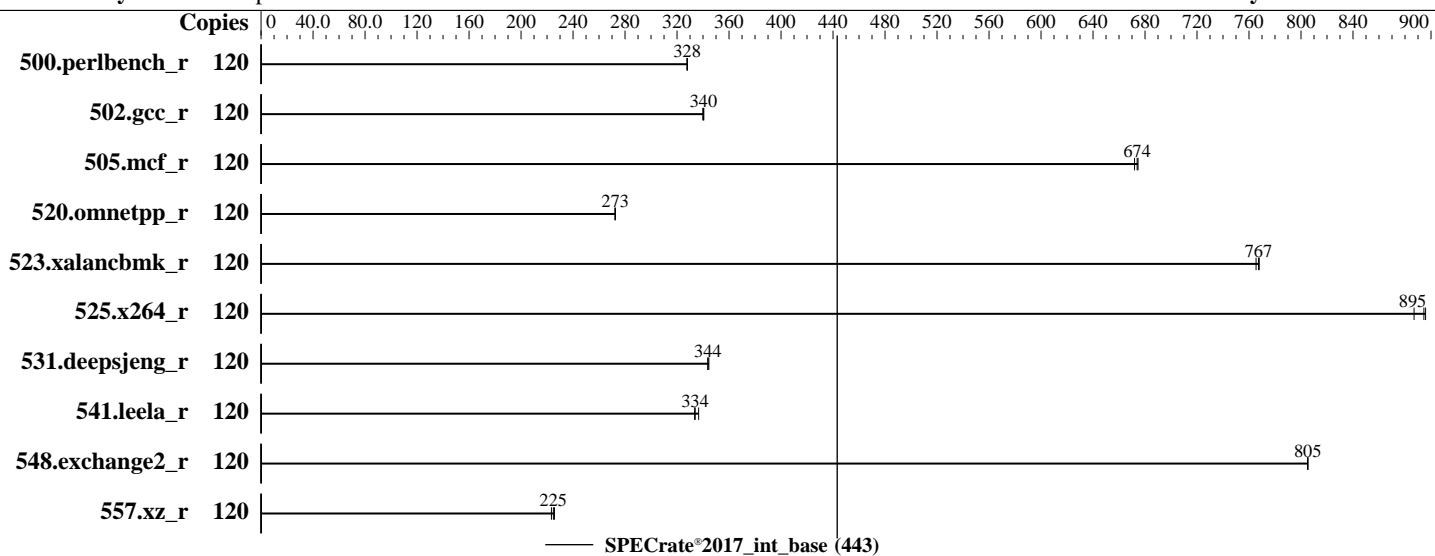

### Hardware

CPU Name: Intel Xeon Platinum 8490H  
Max MHz: 3500  
Nominal: 1900  
Enabled: 60 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 112.5 MB I+D on chip per chip  
Other: None  
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)  
Storage: 1 x 120 GB NVMe SSD  
Other: None

### OS:

SUSE Linux Enterprise Server 15 SP4

Kernel 5.14.21-150400.22-default

C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;

Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;

No

Version 1.0a released Nov-2022

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

Not Applicable

Other:

None

Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 443**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	120	583	328	<b>583</b>	<b>328</b>	582	328									
502.gcc_r	120	<b>499</b>	<b>340</b>	499	341	500	340									
505.mcf_r	120	289	672	<b>288</b>	<b>674</b>	287	675									
520.omnetpp_r	120	578	272	<b>578</b>	273	<b>578</b>	<b>273</b>									
523.xalancbmk_r	120	165	768	166	765	<b>165</b>	<b>767</b>									
525.x264_r	120	235	896	237	887	<b>235</b>	<b>895</b>									
531.deepsjeng_r	120	400	344	399	344	<b>400</b>	<b>344</b>									
541.leela_r	120	<b>595</b>	<b>334</b>	590	337	596	334									
548.exchange2_r	120	390	805	391	805	<b>390</b>	<b>805</b>									
557.xz_r	120	574	226	<b>576</b>	<b>225</b>	580	223									

**SPECrate®2017\_int\_base = 443**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Performance

DCU Streamer Prefetcher = Disable

SNC = Enable SNC4 (4-clusters)

LLC Dead Line Alloc = Disable

KTI Prefetch = Enable

Stale AtoS = Disable

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Fri Dec 2 10:18:52 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8490H  
1 "physical id"s (chips)  
120 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 60  
siblings : 120  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52  
53 54 55 56 57 58 59

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	120
On-line CPU(s) list:	0-119
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Platinum 8490H
CPU family:	6

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

**SPECrate®2017\_int\_base = 443**

**SPECrate®2017\_int\_peak = Not Run**

**CPU2017 License:** 001176

**Test Date:** Dec-2022

**Test Sponsor:** Supermicro

**Hardware Availability:** Jan-2023

**Tested by:** Supermicro

**Software Availability:** Jun-2022

## Platform Notes (Continued)

```

Model: 143
Thread(s) per core: 2
Core(s) per socket: 60
Socket(s): 1
Stepping: 6
Frequency boost: enabled
CPU max MHz: 1901.0000
CPU min MHz: 800.0000
BogoMIPS: 3800.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmpfperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bm1
hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi
umpk uopk ospke waitpkg avx512_vbmi2 gfn_i vaes vpclmulqdq avx512_vnni avx512_bitalg
tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdir64b enqcmd
fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld
arch_capabilities
Virtualization: VT-x
L1d cache: 2.8 MiB (60 instances)
L1i cache: 1.9 MiB (60 instances)
L2 cache: 120 MiB (60 instances)
L3 cache: 112.5 MiB (1 instance)
NUMA node(s): 4
NUMA node0 CPU(s): 0-14,60-74
NUMA node1 CPU(s): 15-29,75-89
NUMA node2 CPU(s): 30-44,90-104
NUMA node3 CPU(s): 45-59,105-119
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.8M	12	Data	1	64	1	64
L1i	32K	1.9M	8	Instruction	1	64	1	64
L2	2M	120M	16	Unified	2	2048	1	64
L3	112.5M	112.5M	15	Unified	3	122880	1	64

/proc/cpuinfo cache data  
cache size : 115200 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## Platform Notes (Continued)

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 60 61 62 63 64 65 66 67 68 69 70 71 72
73 74
node 0 size: 64109 MB
node 0 free: 63403 MB
node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 75 76 77 78 79 80 81 82 83 84
85 86 87 88 89
node 1 size: 64504 MB
node 1 free: 64177 MB
node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 90 91 92 93 94 95 96 97 98 99
100 101 102 103 104
node 2 size: 64504 MB
node 2 free: 64248 MB
node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 105 106 107 108 109 110 111
112 113 114 115 116 117 118 119
node 3 size: 64475 MB
node 3 free: 64153 MB
node distances:
node 0 1 2 3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10
```

```
From /proc/meminfo
MemTotal:           263776152 kB
HugePages_Total:      0
Hugepagesize:        2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
ondemand
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP4"
  VERSION_ID="15.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

```
uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## Platform Notes (Continued)

conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 3 Dec 2 09:34

SPEC is set to: /home/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p2  xfs   117G  7.7G  110G   7%  /
```

From /sys/devices/virtual/dmi/id

```
Vendor:        Supermicro
Product:       Super Server
Product Family: Family
Serial:        0123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800
```

BIOS:

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     1.0a
BIOS Date:        11/24/2022
BIOS Revision:    5.29
```

(End of data from sysinfo program)

## Compiler Version Notes

=====

```
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
```

=====

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

=====

=====

```
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
```

=====

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

=====

=====

```
Fortran | 548.exchange2_r(base)
```

=====

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 001176

Test Date: Dec-2022

Test Sponsor: Supermicro

Hardware Availability: Jan-2023

Tested by: Supermicro

Software Availability: Jun-2022

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

SuperServer SYS-F511E2-RT  
(X13SEFR-A , Intel Xeon Platinum 8490H)

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 001176

**Test Date:** Dec-2022

**Test Sponsor:** Supermicro

**Hardware Availability:** Jan-2023

**Tested by:** Supermicro

**Software Availability:** Jun-2022

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-01 21:18:52-0500.

Report generated on 2024-01-29 17:15:34 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-10.