SPEC CPU®2017 Floating Point Rate Result

xFusion

FusionServer 1288H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = Not Run

CPU2017 License:	6488	**Test Date:**	Dec-2022
Test Sponsor:	xFusion	**Hardware Availability:**	Jan-2023
Tested by:	xFusion	**Software Availability:**	May-2022

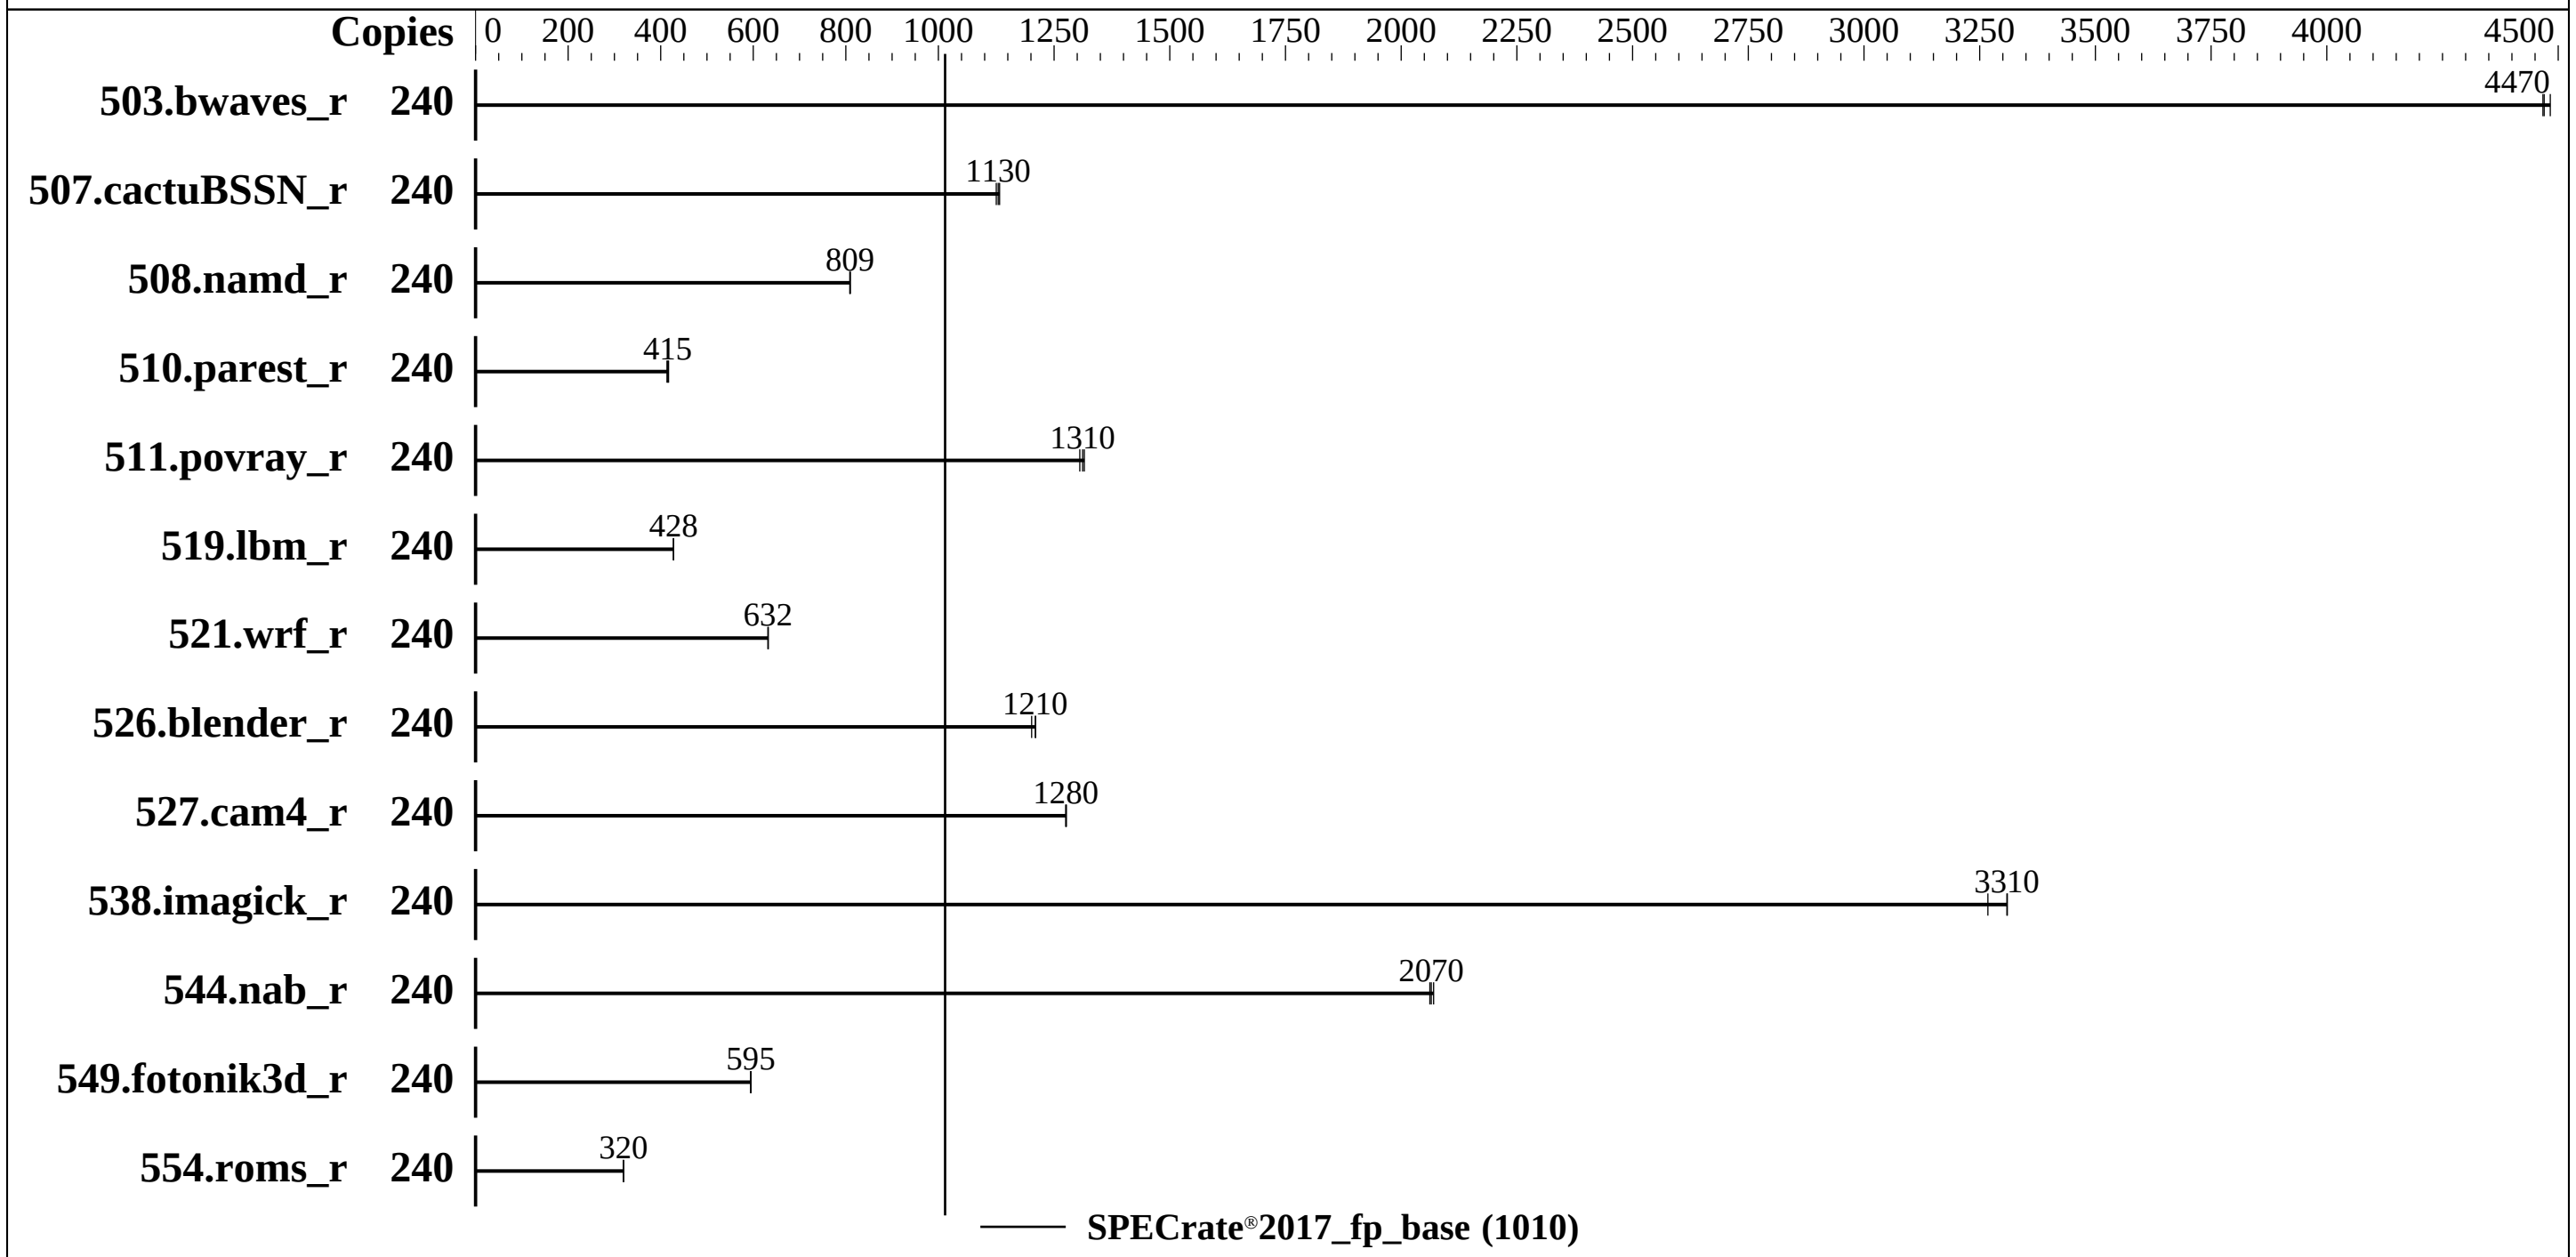

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	120 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 1920 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 2.00.35 Released Nov-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

xFusion

FusionServer 1288H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion
Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

Results Table

Benchmark	Base Copies	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Copies	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
503.bwaves_r	240	537	4480	**538**	**4470**	539	4470							
507.cactuBSSN_r	240	268	1130	**269**	**1130**	270	1130							
508.namd_r	240	282	810	**282**	**809**	282	809							
510.parest_r	240	**1512**	**415**	1506	417	1518	414							
511.povray_r	240	**427**	**1310**	426	1320	429	1310							
519.lbm_r	240	591	428	592	428	**591**	**428**							
521.wrf_r	240	851	632	**851**	**632**	850	632							
526.blender_r	240	**302**	**1210**	302	1210	304	1200							
527.cam4_r	240	**329**	**1280**	329	1280	329	1280							
538.imagick_r	240	183	3270	180	3310	**180**	**3310**							
544.nab_r	240	**196**	**2070**	196	2060	195	2070							
549.fotonik3d_r	240	**1572**	**595**	1573	595	1571	595							
554.roms_r	240	1194	319	1193	320	**1193**	**320**							

SPECrate®2017_fp_base = 1010

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Sun Dec  4 18:55:41 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8490H
      2  "physical id"s (chips)
      240 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 60
      siblings  : 120
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59

From lscpu from util-linux 2.37.4:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Address sizes:                   46 bits physical, 57 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
Byte Order:                      Little Endian
CPU(s):                          240
On-line CPU(s) list:             0-239
Vendor ID:                       GenuineIntel
BIOS Vendor ID:                  Intel(R) Corporation
Model name:                      Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:                 Intel(R) Xeon(R) Platinum 8490H
CPU family:                      6
Model:                           143
Thread(s) per core:              2
Core(s) per socket:              60
Socket(s):                       2
Stepping:                        6
BogoMIPS:                        3800.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est
tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       5.6 MiB (120 instances)
L1i cache:                       3.8 MiB (120 instances)
L2 cache:                        240 MiB (120 instances)
L3 cache:                        225 MiB (2 instances)
NUMA node(s):                    8
NUMA node0 CPU(s):               0-14,120-134
NUMA node1 CPU(s):               15-29,135-149
NUMA node2 CPU(s):               30-44,150-164
NUMA node3 CPU(s):               45-59,165-179
NUMA node4 CPU(s):               60-74,180-194
NUMA node5 CPU(s):               75-89,195-209
NUMA node6 CPU(s):               90-104,210-224
NUMA node7 CPU(s):               105-119,225-239
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
     Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
     prctl
     Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
     pointer sanitization
     Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
     filling
     Vulnerability Srbds:             Not affected
     Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.6M   12 Data            1     64        1             64
     L1i       32K     3.8M    8 Instruction     1     64        1             64
     L2         2M     240M   16 Unified         2   2048        1             64
     L3    112.5M     225M   15 Unified         3 122880        1             64

/proc/cpuinfo cache data
   cache size : 115200 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129
  130 131 132 133 134
  node 0 size: 63567 MB
  node 0 free: 47754 MB
  node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141
  142 143 144 145 146 147 148 149
  node 1 size: 64505 MB
  node 1 free: 58004 MB
  node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156
  157 158 159 160 161 162 163 164
  node 2 size: 64505 MB
  node 2 free: 57968 MB
  node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171
  172 173 174 175 176 177 178 179
  node 3 size: 64505 MB
  node 3 free: 57967 MB
  node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186
  187 188 189 190 191 192 193 194
  node 4 size: 64505 MB
  node 4 free: 58015 MB
  node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201
  202 203 204 205 206 207 208 209
  node 5 size: 64505 MB
  node 5 free: 57999 MB
  node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215
```

(Continued on next page)

Platform Notes (Continued)

```
  216 217 218 219 220 221 222 223 224
  node 6 size: 64469 MB
  node 6 free: 57985 MB
  node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227
  228 229 230 231 232 233 234 235 236 237 238 239
  node 7 size: 64485 MB
  node 7 free: 58009 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

From /proc/meminfo
   MemTotal:       527411156 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="9.0 (Plow)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="9.0"
      PLATFORM_ID="platform:el9"
      PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
   system-release: Red Hat Enterprise Linux release 9.0 (Plow)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

uname -a:
   Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
   12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                              Not affected
CVE-2018-3620 (L1 Terminal Fault):                           Not affected
Microarchitectural Data Sampling:                            Not affected
CVE-2017-5754 (Meltdown):                                    Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
CVE-2018-3639 (Speculative Store Bypass):                  Mitigation: Speculative Store
                                                           Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):                         Mitigation: usercopy/swapgs
                                                           barriers and __user pointer
                                                           sanitization
CVE-2017-5715 (Spectre variant 2):                        Mitigation: Enhanced IBRS, IBPB:
                                                           conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                   Not affected

run-level 3 Dec 4 15:27

SPEC is set to: /home/speccpu
   Filesystem             Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   1.7T   75G  1.6T   5% /home

From /sys/devices/virtual/dmi/id
    Vendor:         XFUSION
    Product:        1288H V7
    Product Family: Eagle Stream
    Serial:         2106182101X3N8000006

Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

BIOS:
   BIOS Vendor:       XFUSION
   BIOS Version:      2.00.35
   BIOS Date:         11/30/2022
   BIOS Revision:     0.35

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`
510.parest_r: `-DSPEC_LP64`
511.povray_r: `-DSPEC_LP64`
519.lbm_r: `-DSPEC_LP64`
521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.xml

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-04 05:55:40-0500.
Report generated on 2023-01-10 19:02:00 by CPU2017 PS formatter v6442.
Originally published on 2023-01-10.