SPEC CPU®2017 Integer Speed Result

xFusion

FusionServer 2288H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017_int_base = 15.5

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion
Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

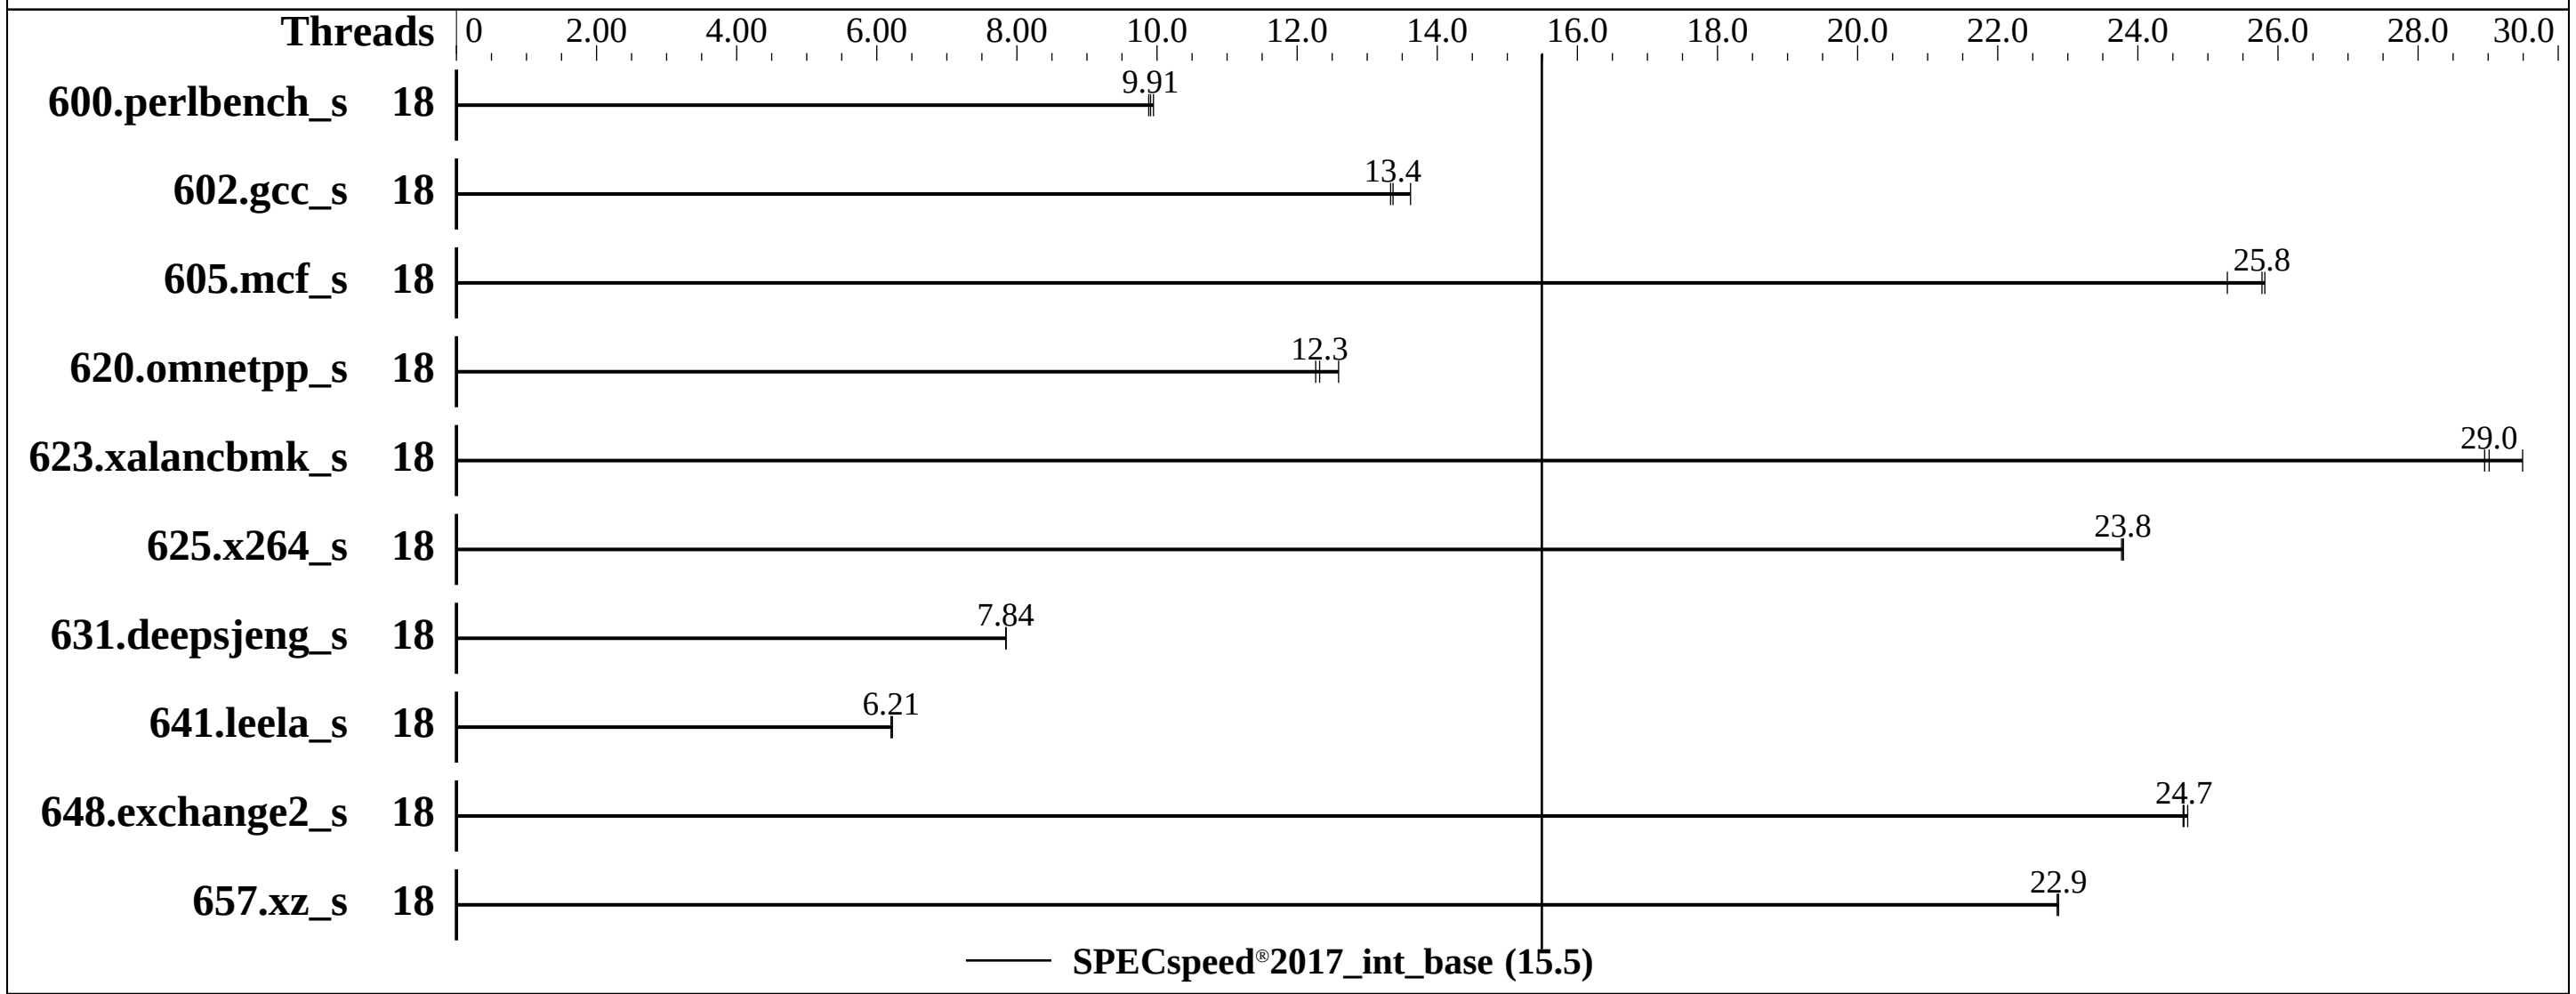

Hardware

CPU Name:	Intel Xeon Gold 6416H
Max MHz:	4200
Nominal:	2200
Enabled:	18 cores, 1 chip
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	45 MB I+D on chip per chip
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 2.00.35 Released Nov-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	18	180	9.88	**179**	**9.91**	178	9.95							
602.gcc_s	18	**298**	**13.4**	292	13.6	299	13.3							
605.mcf_s	18	187	25.3	**183**	**25.8**	183	25.8							
620.omnetpp_s	18	130	12.6	**132**	**12.3**	133	12.3							
623.xalancbmk_s	18	**48.8**	**29.0**	48.9	28.9	48.0	29.5							
625.x264_s	18	**74.2**	**23.8**	74.1	23.8	74.2	23.8							
631.deepsjeng_s	18	183	7.84	183	7.85	**183**	**7.84**							
641.leela_s	18	274	6.22	**275**	**6.21**	275	6.20							
648.exchange2_s	18	**119**	**24.7**	119	24.6	119	24.7							
657.xz_s	18	**270**	**22.9**	271	22.8	270	22.9							

SPECspeed®2017_int_base = 15.5

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Performance Profile Set to Load Balance
Enable LP [Global] Set to Single LP

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Tue Dec  6 14:10:42 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6416H
      1  "physical id"s (chips)
      18 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 18
      siblings  : 18
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

From lscpu from util-linux 2.37.4:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Address sizes:                   46 bits physical, 57 bits virtual
     Byte Order:                      Little Endian
     CPU(s):                          18
     On-line CPU(s) list:             0-17
     Vendor ID:                       GenuineIntel
     BIOS Vendor ID:                  Intel(R) Corporation
     Model name:                      Intel(R) Xeon(R) Gold 6416H
     BIOS Model name:                 Intel(R) Xeon(R) Gold 6416H
     CPU family:                      6
     Model:                           143
     Thread(s) per core:              1
     Core(s) per socket:              18
     Socket(s):                       1
     Stepping:                        7
     Frequency boost:                 enabled
     CPU max MHz:                     2201.0000
     CPU min MHz:                     800.0000
     BogoMIPS:                        4400.00
     Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
     pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
```

(Continued on next page)

Platform Notes (Continued)

```
     pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
     nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
     smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
     tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
     epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
     ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
     avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
     clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
     xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
     avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
     avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
     la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
     tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
     Virtualization:                  VT-x
     L1d cache:                       864 KiB (18 instances)
     L1i cache:                       576 KiB (18 instances)
     L2 cache:                        36 MiB (18 instances)
     L3 cache:                        45 MiB (1 instance)
     NUMA node(s):                    1
     NUMA node0 CPU(s):               0-17
     Vulnerability Itlb multihit:     Not affected
     Vulnerability L1tf:              Not affected
     Vulnerability Mds:               Not affected
     Vulnerability Meltdown:          Not affected
     Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
     prctl
     Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
     pointer sanitization
     Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
     filling
     Vulnerability Srbds:             Not affected
     Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     864K   12 Data            1    64        1             64
     L1i       32K     576K    8 Instruction     1    64        1             64
     L2         2M      36M   16 Unified         2  2048        1             64
     L3        45M      45M   15 Unified         3 49152        1             64

/proc/cpuinfo cache data
   cache size : 46080 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
  node 0 size: 256866 MB
  node 0 free: 255964 MB
  node distances:
  node   0
    0:  10

From /proc/meminfo
   MemTotal:       263031540 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance
```

(Continued on next page)

Platform Notes (Continued)

```
From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="9.0 (Plow)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="9.0"
      PLATFORM_ID="platform:el9"
      PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
   system-release: Red Hat Enterprise Linux release 9.0 (Plow)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

uname -a:
   Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14
   12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 Dec 6 14:08

SPEC is set to: /home/speccpu
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   372G   13G  359G   4% /home

From /sys/devices/virtual/dmi/id
    Product:        2288H V7
    Product Family: Eagle Stream

Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    8x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

BIOS:
   BIOS Vendor:
   BIOS Version:      2.00.35
   BIOS Date:         11/30/2022
   BIOS Revision:     0.35

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Base Portability Flags

600.perlbench_s: `-DSPEC_LP64 -DSPEC_LINUX_X64`
602.gcc_s: `-DSPEC_LP64`
605.mcf_s: `-DSPEC_LP64`
620.omnetpp_s: `-DSPEC_LP64`
623.xalancbmk_s: `-DSPEC_LP64 -DSPEC_LINUX`
625.x264_s: `-DSPEC_LP64`
631.deepsjeng_s: `-DSPEC_LP64`
641.leela_s: `-DSPEC_LP64`
648.exchange2_s: `-DSPEC_LP64`
657.xz_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.0-revB.xml

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-06 01:10:41-0500.
Report generated on 2024-01-29 17:15:53 by CPU2017 PS formatter v6716.
Originally published on 2023-01-10.