SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Platinum 8480+, 2.00 GHz)

SPECrate®2017_fp_base = 939

SPECrate®2017_fp_peak = 994

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

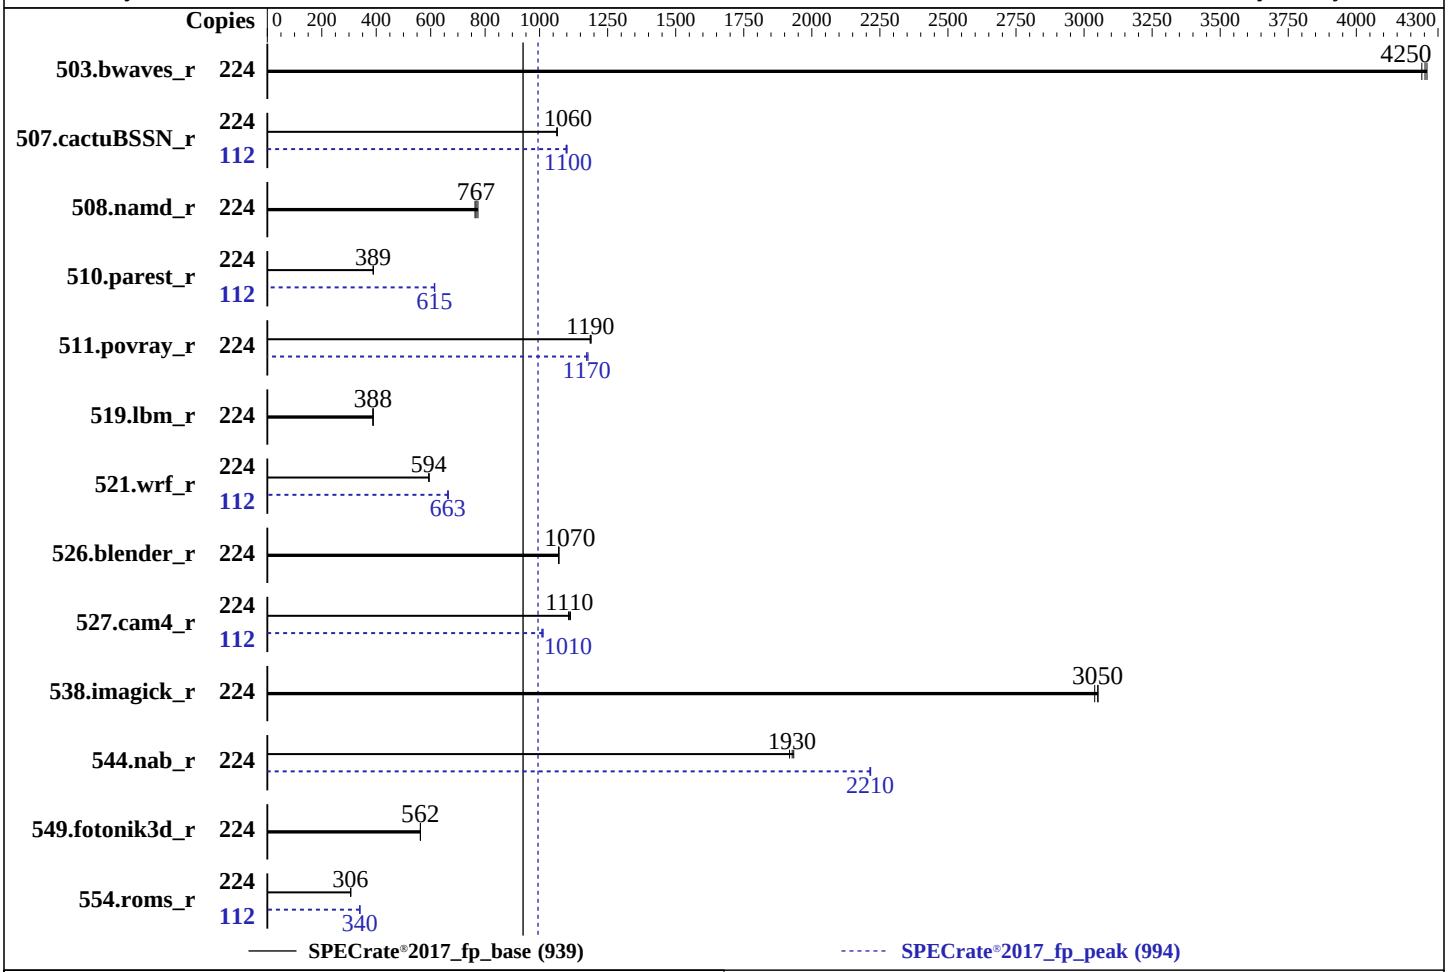

Hardware

CPU Name:	Intel Xeon Platinum 8480+
Max MHz:	3800
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 240 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP3 5.3.18-57-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler Build 20220316 for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler Build 20220316 for Linux;
Parallel:	No
Firmware:	Nettrix BIOS Version NNH1041018-U00-1 released Nov-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Platinum 8480+, 2.00 GHz)

SPECrate®2017_fp_base = 939

SPECrate®2017_fp_peak = 994

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2022
Hardware Availability: Jan-2023
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	527	4260	**528**	**4250**	530	4240	224	527	4260	**528**	**4250**	530	4240
507.cactuBSSN_r	224	267	1060	**267**	**1060**	266	1070	112	129	1100	**129**	**1100**	129	1100
508.namd_r	224	**277**	**767**	279	763	275	774	224	**277**	**767**	279	763	275	774
510.parest_r	224	**1506**	**389**	1507	389	1503	390	112	477	615	478	613	**477**	**615**
511.povray_r	224	440	1190	**441**	**1190**	441	1190	224	444	1180	**446**	**1170**	446	1170
519.lbm_r	224	607	389	**608**	**388**	608	388	224	607	389	**608**	**388**	608	388
521.wrf_r	224	845	593	**845**	**594**	845	594	112	**378**	**663**	377	665	379	662
526.blender_r	224	318	1070	319	1070	**319**	**1070**	224	318	1070	319	1070	**319**	**1070**
527.cam4_r	224	352	1110	**353**	**1110**	354	1110	112	**194**	**1010**	193	1010	194	1010
538.imagick_r	224	**183**	**3050**	183	3050	183	3040	224	**183**	**3050**	183	3050	183	3040
544.nab_r	224	**196**	**1930**	195	1930	197	1920	224	170	2210	170	2220	**170**	**2210**
549.fotonik3d_r	224	1553	562	1552	562	**1552**	**562**	224	1553	562	1552	562	**1552**	**562**
554.roms_r	224	**1163**	**306**	1164	306	1161	307	112	523	340	**524**	**340**	524	339

SPECrate®2017_fp_base = 939

SPECrate®2017_fp_peak = 994

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/lijq/lib/intel64:/home/lijq/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
```

(Continued on next page)

General Notes (Continued)

```
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
  is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
  Enable LP [Global] set to ALL LPs
  LLC Prefetch set to Disabled
  SNC (Sub NUMA) set to Enabled SNC4 (4-clusters)
  Patrol Scrub set to Disabled
  LLC dead line alloc set to Disabled
  XPT Prefetch set to Enabled
  KTI Prefetch set to Disabled
  DCU Streamer Prefetcher set to Disabled
  Hardware P-States set to Native Mode

Sysinfo program /home/lijq/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Thu Dec 15 12:28:44 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8480+
      2  "physical id"s (chips)
      224 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 56
      siblings  : 112
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
```

(Continued on next page)

Platform Notes (Continued)

```
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55

 From lscpu from util-linux 2.36.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Byte Order:                      Little Endian
      Address sizes:                   52 bits physical, 57 bits virtual
      CPU(s):                          224
      On-line CPU(s) list:             0-223
      Thread(s) per core:              2
      Core(s) per socket:              56
      Socket(s):                       2
      NUMA node(s):                    8
      Vendor ID:                       GenuineIntel
      CPU family:                      6
      Model:                           143
      Model name:                      Intel(R) Xeon(R) Platinum 8480+
      Stepping:                        8
      CPU MHz:                         3000.000
      CPU max MHz:                     3800.0000
      CPU min MHz:                     800.0000
      BogoMIPS:                        4000.00
      Virtualization:                  VT-x
      L1d cache:                       5.3 MiB
      L1i cache:                       3.5 MiB
      L2 cache:                        224 MiB
      L3 cache:                        210 MiB
      NUMA node0 CPU(s):               0-13,112-125
      NUMA node1 CPU(s):               14-27,126-139
      NUMA node2 CPU(s):               28-41,140-153
      NUMA node3 CPU(s):               42-55,154-167
      NUMA node4 CPU(s):               56-69,168-181
      NUMA node5 CPU(s):               70-83,182-195
      NUMA node6 CPU(s):               84-97,196-209
      NUMA node7 CPU(s):               98-111,210-223
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
      filling
      Vulnerability Srbds:             Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
      Vulnerability Tsx async abort:   Not affected
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
      pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl vmx smx est
      tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
      tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
      epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp
      ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
      hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
      hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
      vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid cldemote
      movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig avx512_fp16
      flush_l1d arch_capabilities

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     5.3M   12 Data            1     64        1             64
      L1i       32K     3.5M    8 Instruction     1     64        1             64
      L2         2M     224M   16 Unified         2   2048        1             64
      L3       105M     210M   15 Unified         3 114688        1             64

  /proc/cpuinfo cache data
     cache size : 107520 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 112 113 114 115 116 117 118 119 120 121
    122 123 124 125
    node 0 size: 128505 MB
    node 0 free: 128107 MB
    node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 126 127 128 129 130 131 132 133
    134 135 136 137 138 139
    node 1 size: 129017 MB
    node 1 free: 128748 MB
    node 2 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 140 141 142 143 144 145 146 147
    148 149 150 151 152 153
    node 2 size: 129017 MB
    node 2 free: 128773 MB
    node 3 cpus: 42 43 44 45 46 47 48 49 50 51 52 53 54 55 154 155 156 157 158 159 160 161
    162 163 164 165 166 167
    node 3 size: 129017 MB
    node 3 free: 128778 MB
```


(Continued on next page)

Platform Notes (Continued)

```
   node 4 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 168 169 170 171 172 173 174 175
   176 177 178 179 180 181
   node 4 size: 129017 MB
   node 4 free: 128771 MB
   node 5 cpus: 70 71 72 73 74 75 76 77 78 79 80 81 82 83 182 183 184 185 186 187 188 189
   190 191 192 193 194 195
   node 5 size: 129017 MB
   node 5 free: 128659 MB
   node 6 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 196 197 198 199 200 201 202 203
   204 205 206 207 208 209
   node 6 size: 129017 MB
   node 6 free: 128781 MB
   node 7 cpus: 98 99 100 101 102 103 104 105 106 107 108 109 110 111 210 211 212 213 214
   215 216 217 218 219 220 221 222 223
   node 7 size: 128754 MB
   node 7 free: 128423 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  21  21  21  21
     1:  12  10  12  12  21  21  21  21
     2:  12  12  10  12  21  21  21  21
     3:  12  12  12  10  21  21  21  21
     4:  21  21  21  21  10  12  12  12
     5:  21  21  21  21  12  10  12  12
     6:  21  21  21  21  12  12  10  12
     7:  21  21  21  21  12  12  12  10

From /proc/meminfo
   MemTotal:       1056116452 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP3"
      VERSION_ID="15.3"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:
```

(Continued on next page)

Platform Notes (Continued)

```
   Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64
   x86_64 x86_64 GNU/Linux

 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                        Not affected
 CVE-2018-3620 (L1 Terminal Fault):                     Not affected
 Microarchitectural Data Sampling:                      Not affected
 CVE-2017-5754 (Meltdown):                              Not affected
 CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                        Bypass disabled via prctl and
                                                        seccomp
 CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                        barriers and __user pointer
                                                        sanitization
 CVE-2017-5715 (Spectre variant 2):                     Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

 run-level 3 Dec 15 11:28

 SPEC is set to: /home/lijq
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/sda5      xfs   142G  109G   33G  77% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Nettrix
     Product:        R620 G50 LP
     Product Family: Rack
     Serial:         6101823903509474

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      NNH1041018-U00-1
    BIOS Date:         11/01/2022
    BIOS Revision:     5.29

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r (continued):
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-14 23:28:43-0500.
Report generated on 2023-01-10 19:02:25 by CPU2017 PS formatter v6442.
Originally published on 2023-01-10.