SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_base = 840

SPECrate®2017_fp_peak = 896

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Feb-2023
Software Availability: Nov-2022

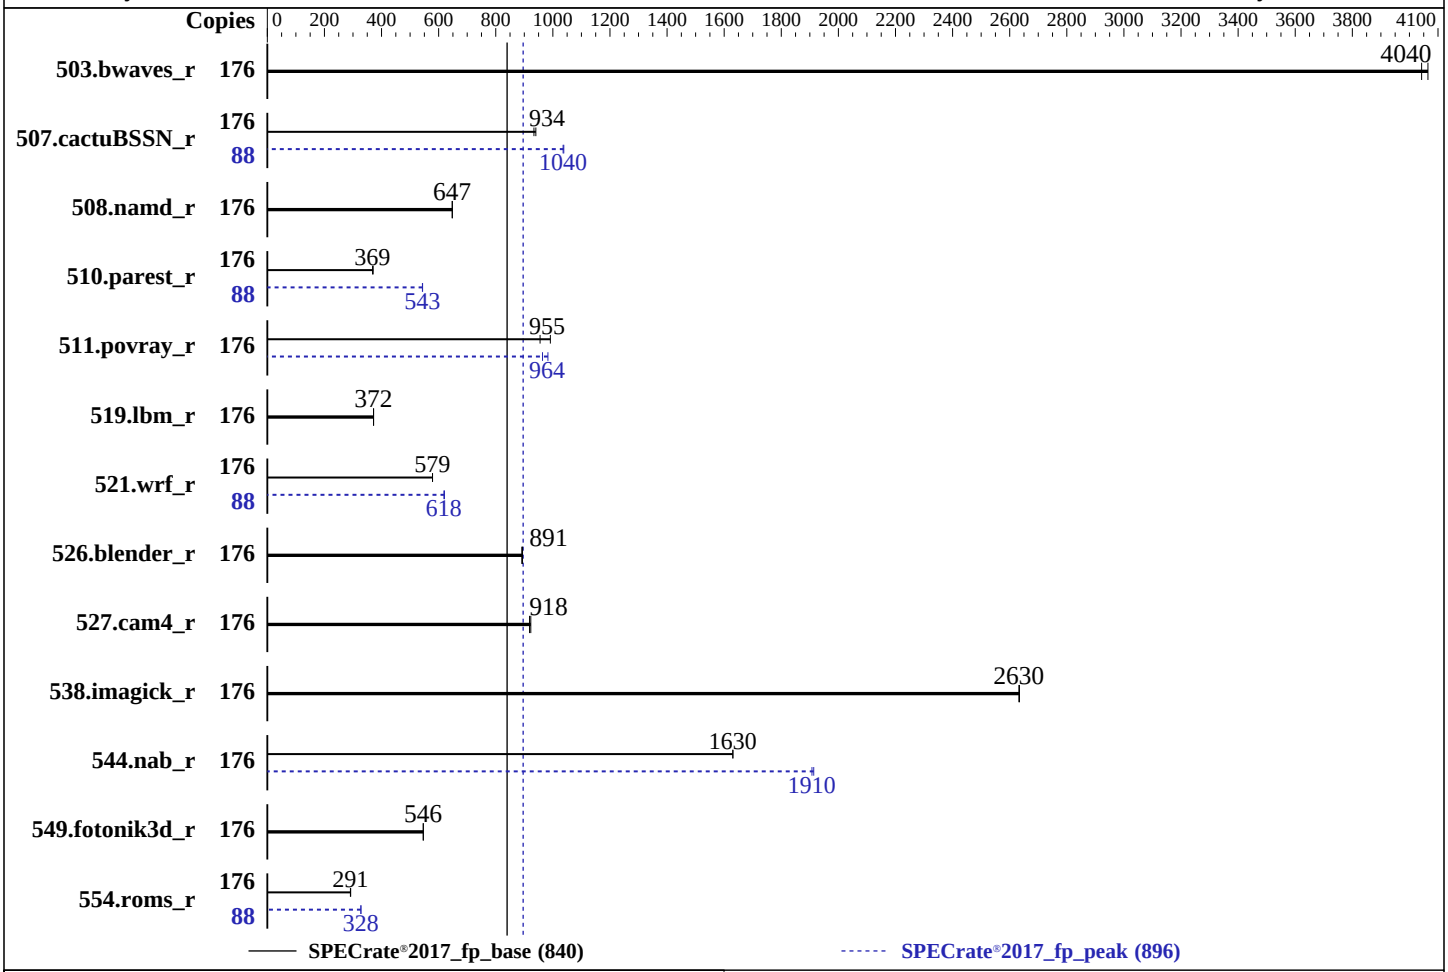

Hardware

CPU Name:	Intel Xeon Platinum 8458P
Max MHz:	3800
Nominal:	2700
Enabled:	88 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	82.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.7 (Ootpa) 4.18.0-425.3.1.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 0.3.2 released Nov-2022
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8458P)

SPECrate®2017_fp_base = 840

SPECrate®2017_fp_peak = 896

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2022
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	176	434	4060	**437**	**4040**			176	434	4060	**437**	**4040**		
507.cactuBSSN_r	176	**239**	**934**	237	940			88	**108**	**1040**	107	1040		
508.namd_r	176	258	648	**258**	**647**			176	258	648	**258**	**647**		
510.parest_r	176	1242	371	**1249**	**369**			88	423	544	**424**	**543**		
511.povray_r	176	415	991	**430**	**955**			176	418	983	**426**	**964**		
519.lbm_r	176	498	372	**499**	**372**			176	498	372	**499**	**372**		
521.wrf_r	176	681	579	**681**	**579**			88	**319**	**618**	318	620		
526.blender_r	176	**301**	**891**	300	894			176	**301**	**891**	300	894		
527.cam4_r	176	**335**	**918**	334	923			176	**335**	**918**	334	923		
538.imagick_r	176	**166**	**2630**	166	2630			176	**166**	**2630**	166	2630		
544.nab_r	176	**182**	**1630**	182	1630			176	**155**	**1910**	155	1910		
549.fotonik3d_r	176	**1256**	**546**	1255	546			176	**1256**	**546**	1255	546		
554.roms_r	176	958	292	**961**	**291**			88	426	328	**427**	**328**		

SPECrate®2017_fp_base = 840

SPECrate®2017_fp_peak = 896

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
     1.8-ic2022.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.

 Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                 ADDDC Setting : Disabled
       DIMM Self Healing on
   Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
             Sub NUMA Cluster : 4-way Clustering
      DCU Streamer Prefetcher : Disabled
                  LLC Prefetch : Disabled
          Dead Line LLC Alloc : Disabled
               Optimizer Mode : Enabled

               System Profile : Custom
         CPU Power Management : Maximum Performance
                          C1E : Disabled
                      C States : Autonomous
          Memory Patrol Scrub : Disabled
     Energy Efficiency Policy : Performance
           PCI ASPM L1 Link
             Power Management : Disabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Tue Dec  6 07:33:11 2022

 SUT (System Under Test) info as seen by some common utilities.
```

(Continued on next page)

Platform Notes (Continued)

```
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8458P
      2  "physical id"s (chips)
      176 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 44
      siblings  : 88
      physical 0: cores 0 1 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29
      30 31 32 33 34 35 36 37 38 39 40 41 42 43
      physical 1: cores 0 1 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29
      30 31 32 33 34 35 36 37 38 39 40 41 42 43

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              176
     On-line CPU(s) list: 0-175
     Thread(s) per core:  2
     Core(s) per socket:  44
     Socket(s):           2
     NUMA node(s):        8
     Vendor ID:           GenuineIntel
     BIOS Vendor ID:      Intel
     CPU family:          6
     Model:               143
     Model name:          Intel(R) Xeon(R) Platinum 8458P
     BIOS Model name:     Intel(R) Xeon(R) Platinum 8458P
     Stepping:            8
     CPU MHz:             3800.000
     BogoMIPS:            5400.00
     L1d cache:           48K
     L1i cache:           32K
     L2 cache:            2048K
     L3 cache:            84480K
     NUMA node0 CPU(s):
     0,4,8,12,16,20,24,28,32,36,40,88,92,96,100,104,108,112,116,120,124,128
     NUMA node1 CPU(s):
     44,48,52,56,60,64,68,72,76,80,84,132,136,140,144,148,152,156,160,164,168,172
     NUMA node2 CPU(s):
     2,6,10,14,18,22,26,30,34,38,42,90,94,98,102,106,110,114,118,122,126,130
     NUMA node3 CPU(s):
     46,50,54,58,62,66,70,74,78,82,86,134,138,142,146,150,154,158,162,166,170,174
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node4 CPU(s):
      1,5,9,13,17,21,25,29,33,37,41,89,93,97,101,105,109,113,117,121,125,129
      NUMA node5 CPU(s):
      45,49,53,57,61,65,69,73,77,81,85,133,137,141,145,149,153,157,161,165,169,173
      NUMA node6 CPU(s):
      3,7,11,15,19,23,27,31,35,39,43,91,95,99,103,107,111,115,119,123,127,131
      NUMA node7 CPU(s):
      47,51,55,59,63,67,71,75,79,83,87,135,139,143,147,151,155,159,163,167,171,175
      Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
      aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg
      fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
      xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
      invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust
      bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
      xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
      avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
      avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
      movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr amx_bf16
      avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities

 /proc/cpuinfo cache data
    cache size : 84480 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 88 92 96 100 104 108 112 116 120 124 128
   node 0 size: 128215 MB
   node 0 free: 115262 MB
   node 1 cpus: 44 48 52 56 60 64 68 72 76 80 84 132 136 140 144 148 152 156 160 164 168
   172
   node 1 size: 129019 MB
   node 1 free: 120695 MB
   node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 90 94 98 102 106 110 114 118 122 126 130
   node 2 size: 129019 MB
   node 2 free: 120538 MB
   node 3 cpus: 46 50 54 58 62 66 70 74 78 82 86 134 138 142 146 150 154 158 162 166 170
   174
   node 3 size: 129019 MB
   node 3 free: 120670 MB
   node 4 cpus: 1 5 9 13 17 21 25 29 33 37 41 89 93 97 101 105 109 113 117 121 125 129
   node 4 size: 129019 MB
   node 4 free: 119680 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 5 cpus: 45 49 53 57 61 65 69 73 77 81 85 133 137 141 145 149 153 157 161 165 169
  173
  node 5 size: 128977 MB
  node 5 free: 120506 MB
  node 6 cpus: 3 7 11 15 19 23 27 31 35 39 43 91 95 99 103 107 111 115 119 123 127 131
  node 6 size: 129019 MB
  node 6 free: 120639 MB
  node 7 cpus: 47 51 55 59 63 67 71 75 79 83 87 135 139 143 147 151 155 159 163 167 171
  175
  node 7 size: 129007 MB
  node 7 free: 112914 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

From /proc/meminfo
   MemTotal:       1056046648 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.7 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.7"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.7 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.7 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.7 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
   Linux localhost.localdomain 4.18.0-425.3.1.el8.x86_64 #1 SMP Fri Sep 30 11:45:06 EDT
   2022 x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
 Kernel self-reported vulnerability status:

 CVE-2018-12207 (iTLB Multihit):                          Not affected
 CVE-2018-3620 (L1 Terminal Fault):                       Not affected
 Microarchitectural Data Sampling:                        Not affected
 CVE-2017-5754 (Meltdown):                                Not affected
 mmio_stale_data:                                         Not affected
 retbleed:                                                Not affected
 CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                          Bypass disabled via prctl
 CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                          barriers and __user pointer
                                                          sanitization
 CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                          conditional, RSB filling,
                                                          PBRSB-eIBRS: SW sequence
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

 run-level 5 Dec 6 03:18

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  125G   71G   55G  57% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge MX760c
     Product Family: PowerEdge
     Serial:         MWCFG04

 Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      0.3.2
    BIOS Date:         11/30/2022
    BIOS Revision:     0.3

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

521.wrf_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian`
526.blender_r: `-DSPEC_LP64 -DSPEC_LINUX -funsigned-char`
527.cam4_r: `-DSPEC_LP64 -DSPEC_CASE_FLAG`
538.imagick_r: `-DSPEC_LP64`
544.nab_r: `-DSPEC_LP64`
549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r (continued):
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-05 18:33:11-0500.
Report generated on 2023-01-17 18:40:20 by CPU2017 PS formatter v6442.
Originally published on 2023-01-17.