# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R760 (Intel Xeon Platinum 8470Q)

**SPECrate®2017_fp_base = 916**

**SPECrate®2017_fp_peak = 981**

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Dec-2022
**Hardware Availability:** Feb-2023
**Software Availability:** Jun-2022

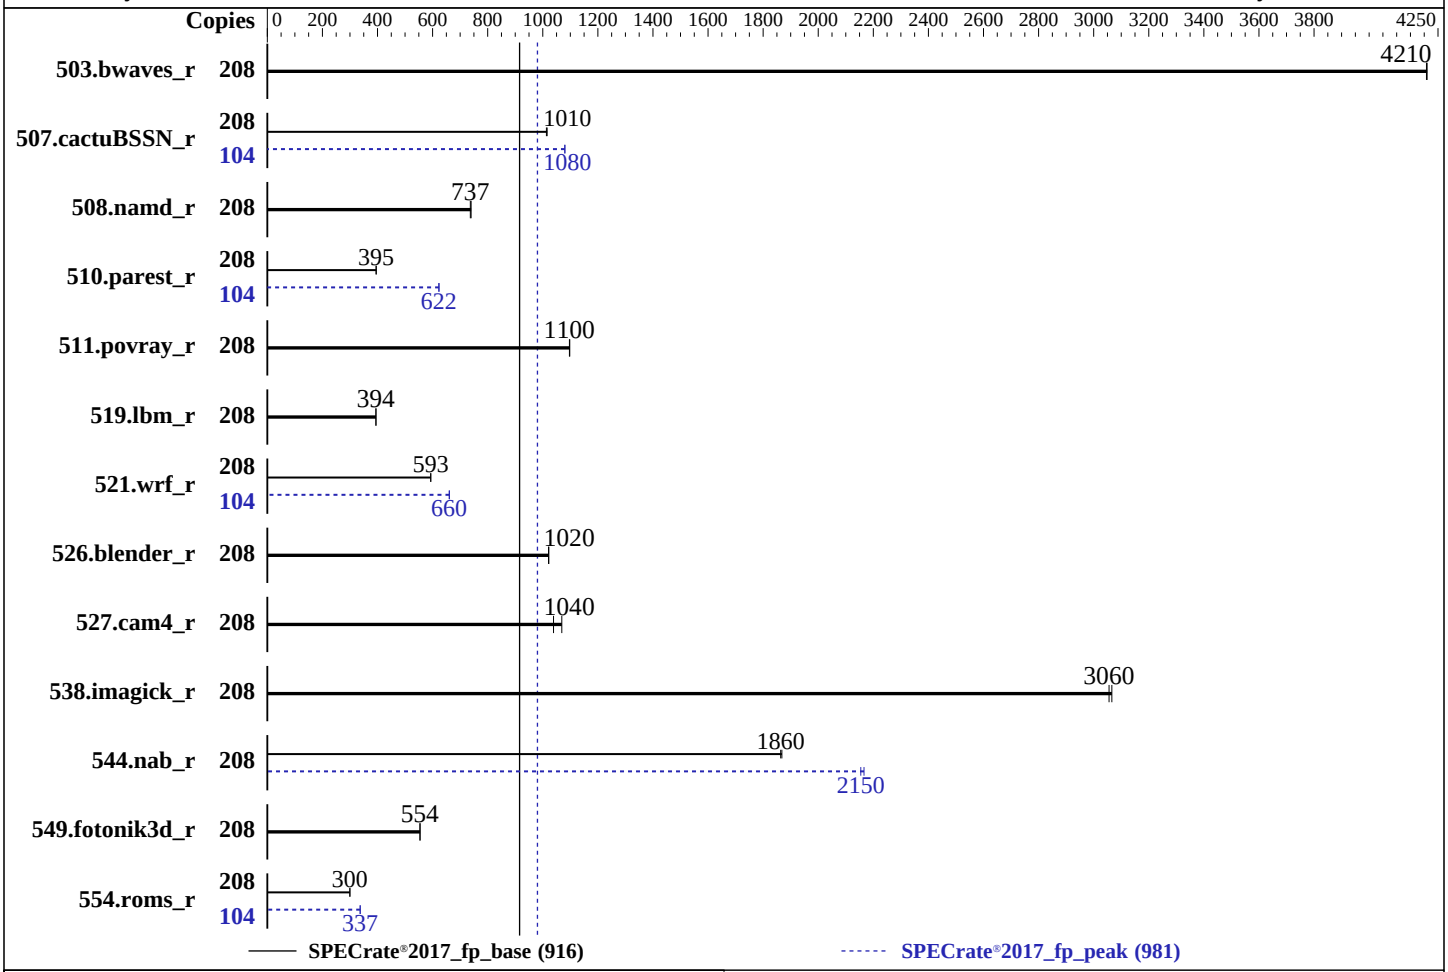


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8470Q |
| Max MHz: | 3800 |
| Nominal: | 2100 |
| Enabled: | 104 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 105 MB I+D on chip per chip |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R) |
| Storage: | 125 GB on tmpfs |
| Other: | None |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP4<br>5.14.21-150400.22-default |
| Compiler: | C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2022.1 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | Version 0.3.2 released Nov-2022 |
| File System: | tmpfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R760 (Intel Xeon Platinum 8470Q)

SPECrate®2017_fp_base = 916

SPECrate®2017_fp_peak = 981

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Dec-2022
**Hardware Availability:** Feb-2023
**Software Availability:** Jun-2022

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 208 | **496** | **4210** | 495 | 4210 | | | 208 | **496** | **4210** | 495 | 4210 | | |
| 507.cactuBSSN_r | 208 | 259 | 1020 | **260** | **1010** | | | 104 | **122** | **1080** | 122 | 1080 | | |
| 508.namd_r | 208 | 267 | 740 | **268** | **737** | | | 208 | 267 | 740 | **268** | **737** | | |
| 510.parest_r | 208 | 1375 | 396 | **1379** | **395** | | | 104 | 436 | 624 | **437** | **622** | | |
| 511.povray_r | 208 | 442 | 1100 | **443** | **1100** | | | 208 | 442 | 1100 | **443** | **1100** | | |
| 519.lbm_r | 208 | **556** | **394** | 556 | 394 | | | 208 | **556** | **394** | 556 | 394 | | |
| 521.wrf_r | 208 | 785 | 594 | **786** | **593** | | | 104 | **353** | **660** | 352 | 661 | | |
| 526.blender_r | 208 | **310** | **1020** | 310 | 1020 | | | 208 | **310** | **1020** | 310 | 1020 | | |
| 527.cam4_r | 208 | 340 | 1070 | **350** | **1040** | | | 208 | 340 | 1070 | **350** | **1040** | | |
| 538.imagick_r | 208 | 169 | 3070 | **169** | **3060** | | | 208 | 169 | 3070 | **169** | **3060** | | |
| 544.nab_r | 208 | **188** | **1860** | 187 | 1870 | | | 208 | 162 | 2170 | **162** | **2150** | | |
| 549.fotonik3d_r | 208 | **1463** | **554** | 1462 | 555 | | | 208 | **1463** | **554** | 1462 | 555 | | |
| 554.roms_r | 208 | 1103 | 300 | **1103** | **300** | | | 104 | 490 | 337 | **490** | **337** | | |

**SPECrate®2017_fp_base = 916**

**SPECrate®2017_fp_peak = 981**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
     1.8-ic2022.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
```

**(Continued on next page)**

## General Notes (Continued)

```
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"
```

## Platform Notes

```
BIOS settings:
                 ADDDC Setting : Disabled
       DIMM Self Healing on
   Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
             Sub NUMA Cluster : 4-way Clustering
      DCU Streamer Prefetcher : Disabled
                  LLC Prefetch : Disabled
          Dead Line LLC Alloc : Disabled
               Optimizer Mode : Enabled

               System Profile : Custom
         CPU Power Management : Maximum Performance
                          C1E : Disabled
                    C States : Autonomous
          Memory Patrol Scrub : Disabled
     Energy Efficiency Policy : Performance
           PCI ASPM L1 Link
             Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Sat Dec  3 13:36:52 2022

SUT (System Under Test) info as seen by some common utilities.
```

**(Continued on next page)**

## Platform Notes (Continued)

```
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8470Q
      2  "physical id"s (chips)
      208 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 52
      siblings  : 104
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51

From lscpu from util-linux 2.37.2:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Address sizes:                   46 bits physical, 57 bits virtual
     Byte Order:                      Little Endian
     CPU(s):                          208
     On-line CPU(s) list:             0-207
     Vendor ID:                       GenuineIntel
     Model name:                      Intel(R) Xeon(R) Platinum 8470Q
     CPU family:                      6
     Model:                           143
     Thread(s) per core:              2
     Core(s) per socket:              52
     Socket(s):                       2
     Stepping:                        8
     BogoMIPS:                        4200.00
     Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
     pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
     pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
     nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl smx est tm2
     ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
     tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
     epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp
     ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a
     avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
     avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln
     pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
     avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri
     movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
     amx_tile flush_l1d arch_capabilities
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      L1d cache:                       4.9 MiB (104 instances)
      L1i cache:                       3.3 MiB (104 instances)
      L2 cache:                        208 MiB (104 instances)
      L3 cache:                        210 MiB (2 instances)
      NUMA node(s):                    8
      NUMA node0 CPU(s):               0-12,104-116
      NUMA node1 CPU(s):               13-25,117-129
      NUMA node2 CPU(s):               26-38,130-142
      NUMA node3 CPU(s):               39-51,143-155
      NUMA node4 CPU(s):               52-64,156-168
      NUMA node5 CPU(s):               65-77,169-181
      NUMA node6 CPU(s):               78-90,182-194
      NUMA node7 CPU(s):               91-103,195-207
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
      filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     4.9M   12 Data            1     64        1             64
      L1i       32K     3.3M    8 Instruction     1     64        1             64
      L2         2M     208M   16 Unified         2   2048        1             64
      L3       105M     210M   15 Unified         3 114688        1             64

  /proc/cpuinfo cache data
     cache size : 107520 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 104 105 106 107 108 109 110 111 112 113 114
    115 116
    node 0 size: 63923 MB
    node 0 free: 48515 MB
    node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 117 118 119 120 121 122 123 124 125
    126 127 128 129
    node 1 size: 64505 MB
    node 1 free: 46797 MB
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 130 131 132 133 134 135 136 137 138
   139 140 141 142
   node 2 size: 64505 MB
   node 2 free: 54233 MB
   node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 143 144 145 146 147 148 149 150 151
   152 153 154 155
   node 3 size: 64505 MB
   node 3 free: 54209 MB
   node 4 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 156 157 158 159 160 161 162 163 164
   165 166 167 168
   node 4 size: 64505 MB
   node 4 free: 54233 MB
   node 5 cpus: 65 66 67 68 69 70 71 72 73 74 75 76 77 169 170 171 172 173 174 175 176 177
   178 179 180 181
   node 5 size: 64505 MB
   node 5 free: 54240 MB
   node 6 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 182 183 184 185 186 187 188 189 190
   191 192 193 194
   node 6 size: 64505 MB
   node 6 free: 54246 MB
   node 7 cpus: 91 92 93 94 95 96 97 98 99 100 101 102 103 195 196 197 198 199 200 201 202
   203 204 205 206 207
   node 7 size: 64458 MB
   node 7 free: 54161 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  21  21  21  21
     1:  12  10  12  12  21  21  21  21
     2:  12  12  10  12  21  21  21  21
     3:  12  12  12  10  21  21  21  21
     4:  21  21  21  21  10  12  12  12
     5:  21  21  21  21  12  10  12  12
     6:  21  21  21  21  12  12  10  12
     7:  21  21  21  21  12  12  12  10

 From /proc/meminfo
    MemTotal:       527784340 kB
    HugePages_Total:       0
    Hugepagesize:       2048 kB

 From /etc/*release* /etc/*version*
    os-release:
       NAME="SLES"
       VERSION="15-SP4"
       VERSION_ID="15.4"
       PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
       ID="sles"
```

**(Continued on next page)**

## Platform Notes (Continued)

```
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:
   Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
   UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                          Not affected
CVE-2018-3620 (L1 Terminal Fault):                       Not affected
Microarchitectural Data Sampling:                        Not affected
CVE-2017-5754 (Meltdown):                                Not affected
CVE-2018-3639 (Speculative Store Bypass):                Mitigation: Speculative Store
                                                         Bypass disabled via prctl and
                                                         seccomp
CVE-2017-5753 (Spectre variant 1):                       Mitigation: usercopy/swapgs
                                                         barriers and __user pointer
                                                         sanitization
CVE-2017-5715 (Spectre variant 2):                      Mitigation: Enhanced IBRS, IBPB:
                                                         conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):                 Not affected

run-level 3 Dec 3 09:09

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  125G   82G   44G  66% /mnt/ramdisk

From /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R760
    Product Family: PowerEdge
    Serial:         SLR7603

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    16x 002C0632002C MTC20F2085S1RC48BA1 32 GB 2 rank 4800

BIOS:
   BIOS Vendor:       Dell Inc.
   BIOS Version:      0.3.2
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    BIOS Date:         11/30/2022
    BIOS Revision:     0.3

 (End of data from sysinfo program)
```

## Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops`

**(Continued on next page)**

# Peak Optimization Flags (Continued)

544.nab_r (continued):
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.8 on 2022-12-03 14:36:52-0500.
Report generated on 2023-01-17 18:44:10 by CPU2017 PS formatter v6442.
Originally published on 2023-01-17.