SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017_int_base = 14.0

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2022
Hardware Availability: Dec-2022
Software Availability: Nov-2022

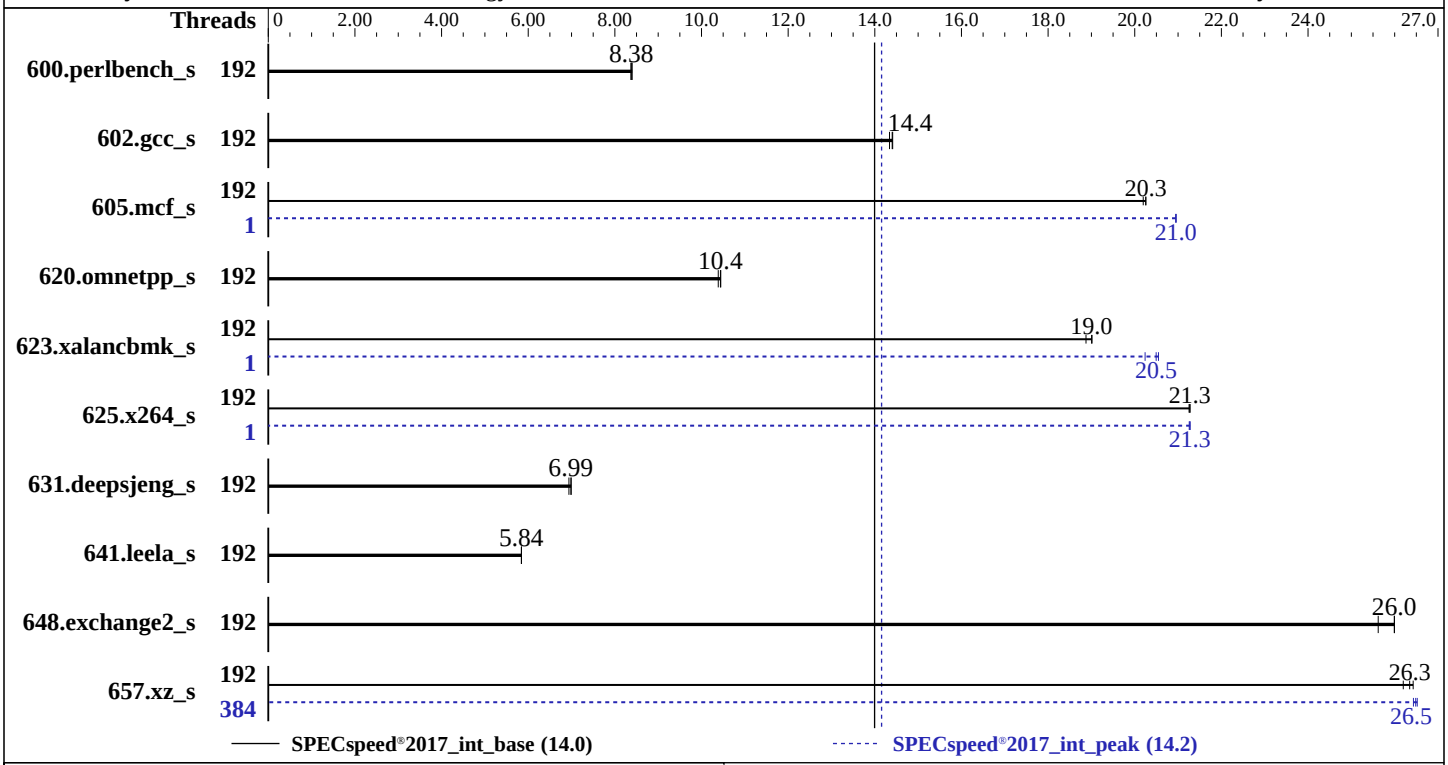

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 3.84 TB NVME SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64) Kernel 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Lenovo BIOS Version QGE105O 1.10 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD665 V3
(2.40 GHz,AMD EPYC 9654)

SPECspeed®2017_int_base = 14.0

SPECspeed®2017_int_peak = 14.2

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2022
Hardware Availability: Dec-2022
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	**212**	**8.38**	211	8.40	212	8.37	192	**212**	**8.38**	211	8.40	212	8.37
602.gcc_s	192	278	14.3	**277**	**14.4**	276	14.4	192	278	14.3	**277**	**14.4**	276	14.4
605.mcf_s	192	233	20.3	234	20.2	**233**	**20.3**	1	225	21.0	**225**	**21.0**	225	20.9
620.omnetpp_s	192	156	10.4	**156**	**10.4**	157	10.4	192	156	10.4	**156**	**10.4**	157	10.4
623.xalancbmk_s	192	**74.6**	**19.0**	75.1	18.9	74.5	19.0	1	69.0	20.5	70.0	20.2	**69.1**	**20.5**
625.x264_s	192	82.9	21.3	**82.9**	**21.3**	83.0	21.3	1	**82.9**	**21.3**	82.9	21.3	83.0	21.3
631.deepsjeng_s	192	206	6.94	205	6.99	**205**	**6.99**	192	206	6.94	205	6.99	**205**	**6.99**
641.leela_s	192	292	5.84	**292**	**5.84**	292	5.84	192	292	5.84	**292**	**5.84**	292	5.84
648.exchange2_s	192	**113**	**26.0**	115	25.6	113	26.0	192	**113**	**26.0**	115	25.6	113	26.0
657.xz_s	192	**235**	**26.3**	236	26.2	234	26.4	384	**233**	**26.5**	233	26.5	234	26.4

SPECspeed®2017_int_base = 14.0

SPECspeed®2017_int_peak = 14.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_speed_aocc400_genoa_B_lib
     /lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "384"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-383"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Operating Mode set to Maximum Performance and then set it to Custom Mode
NUMA Nodes per Socket set to NPS4

 Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost Wed Dec 28 05:15:01 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 9654 96-Core Processor
       2  "physical id"s (chips)
       384 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 96
       siblings  : 192
       physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
       26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
       54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
       82 83 84 85 86 87 88 89 90 91 92 93 94 95
       physical 1: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
       26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
       54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
       82 83 84 85 86 87 88 89 90 91 92 93 94 95

 From lscpu from util-linux 2.37.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   52 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          384
      On-line CPU(s) list:             0-383
      Vendor ID:                       AuthenticAMD
      Model name:                      AMD EPYC 9654 96-Core Processor
      CPU family:                      25
      Model:                           17
      Thread(s) per core:              2
      Core(s) per socket:              96
      Socket(s):                       2
      Stepping:                        1
      Frequency boost:                 enabled
      CPU max MHz:                     3707.8120
      CPU min MHz:                     1500.0000
```

(Continued on next page)

Platform Notes (Continued)

```
      BogoMIPS:                          4799.90
      Flags:                             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
      aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
      avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
      rdpid overflow_recov succor smca fsrm flush_l1d
      Virtualization:                    AMD-V
      L1d cache:                         6 MiB (192 instances)
      L1i cache:                         6 MiB (192 instances)
      L2 cache:                          192 MiB (192 instances)
      L3 cache:                          768 MiB (24 instances)
      NUMA node(s):                      8
      NUMA node0 CPU(s):                 0-23,192-215
      NUMA node1 CPU(s):                 24-47,216-239
      NUMA node2 CPU(s):                 48-71,240-263
      NUMA node3 CPU(s):                 72-95,264-287
      NUMA node4 CPU(s):                 96-119,288-311
      NUMA node5 CPU(s):                 120-143,312-335
      NUMA node6 CPU(s):                 144-167,336-359
      NUMA node7 CPU(s):                 168-191,360-383
      Vulnerability Itlb multihit:       Not affected
      Vulnerability L1tf:                Not affected
      Vulnerability Mds:                 Not affected
      Vulnerability Meltdown:            Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:         Mitigation; Retpolines, IBPB conditional, IBRS_FW,
      STIBP always-on, RSB filling
      Vulnerability Srbds:               Not affected
      Vulnerability Tsx async abort:     Not affected

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       6M    8 Data            1    64        1             64
      L1i       32K       6M    8 Instruction     1    64        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
      L2          1M     192M    8 Unified         2  2048        1              64
      L3         32M     768M   16 Unified         3 32768        1              64

  /proc/cpuinfo cache data
     cache size : 1024 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 8 nodes (0-7)
    node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 192 193 194
    195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215
    node 0 size: 96376 MB
    node 0 free: 93133 MB
    node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
    216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237
    238 239
    node 1 size: 96752 MB
    node 1 free: 96271 MB
    node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
    240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261
    262 263
    node 2 size: 96752 MB
    node 2 free: 96393 MB
    node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
    264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285
    286 287
    node 3 size: 96752 MB
    node 3 free: 96460 MB
    node 4 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114
    115 116 117 118 119 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304
    305 306 307 308 309 310 311
    node 4 size: 96752 MB
    node 4 free: 96505 MB
    node 5 cpus: 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137
    138 139 140 141 142 143 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327
    328 329 330 331 332 333 334 335
    node 5 size: 96717 MB
    node 5 free: 96472 MB
    node 6 cpus: 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161
    162 163 164 165 166 167 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351
    352 353 354 355 356 357 358 359
    node 6 size: 96752 MB
    node 6 free: 96509 MB
    node 7 cpus: 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185
    186 187 188 189 190 191 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375
    376 377 378 379 380 381 382 383
    node 7 size: 96549 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 7 free: 96294 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

From /proc/meminfo
   MemTotal:       791965468 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="SLES"
      VERSION="15-SP4"
      VERSION_ID="15.4"
      PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
      ID="sles"
      ID_LIKE="suse"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:15:sp4"

uname -a:
   Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
   UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                    Not affected
CVE-2018-3620 (L1 Terminal Fault):                 Not affected
Microarchitectural Data Sampling:                  Not affected
CVE-2017-5754 (Meltdown):                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl and
                                                   seccomp
CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                   barriers and __user pointer
                                                   sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Retpolines, IBPB:
                                                       conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 Dec 27 22:27

 SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b
    Filesystem     Type  Size  Used Avail Use% Mounted on
    /dev/nvme1n1p3 xfs   3.5T   27G  3.5T   1% /

 From /sys/devices/virtual/dmi/id
     Vendor:         Lenovo
     Product:        ThinkSystem SD665 V3
     Product Family: ThinkSystem
     Serial:         1234567890

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     5x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800
     3x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800
     16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

 BIOS:
    BIOS Vendor:       Lenovo
    BIOS Version:      QGE105O-1.10
    BIOS Date:         12/19/2022
    BIOS Revision:     1.10
    Firmware Revision: 0.90

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
        | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
        | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

(Continued on next page)

Peak Optimization Flags (Continued)

625.x264_s: `Same as 605.mcf_s`

657.xz_s: `Same as 605.mcf_s`

C++ benchmarks:

620.omnetpp_s: `basepeak = yes`

623.xalancbmk_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt -mllvm -do-block-reorder=aggressive -fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang`

631.deepsjeng_s: `basepeak = yes`

641.leela_s: `basepeak = yes`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-O.html`
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-O.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-27 16:15:00-0500.
Report generated on 2023-01-17 18:46:26 by CPU2017 PS formatter v6442.
Originally published on 2023-01-17.