SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 961

SPECrate®2017_fp_peak = 1020

CPU2017 License: 9082
Test Sponsor: Giga Computing Technology Co., Ltd.
Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

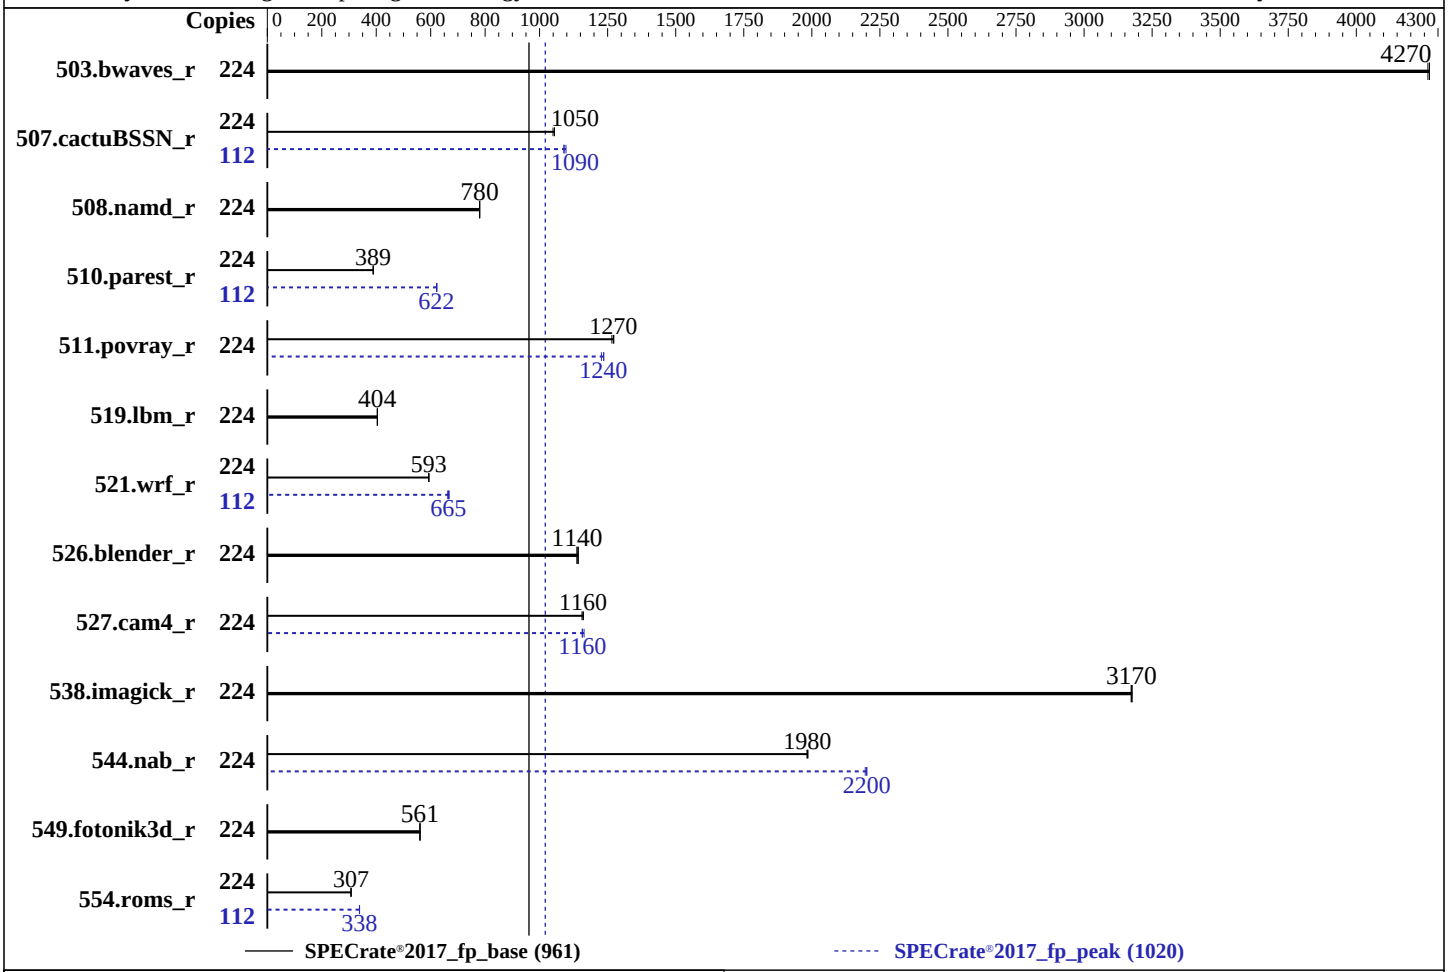

Hardware

CPU Name:	Intel Xeon Platinum 8480+
Max MHz:	3800
Nominal:	2000
Enabled:	112 cores, 2 chips, 2 threads/core
Orderable:	1,2 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 3.84 TB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version F06 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R283-S91 (Intel Xeon Platinum 8480+)

SPECrate®2017_fp_base = 961

SPECrate®2017_fp_peak = 1020

CPU2017 License: 9082
Test Sponsor: Giga Computing Technology Co., Ltd.
Tested by: Giga Computing Technology Co., Ltd.

Test Date: Jan-2023
Hardware Availability: Jan-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	**526**	**4270**	527	4260	526	4270	224	**526**	**4270**	527	4260	526	4270
507.cactuBSSN_r	224	269	1050	**269**	**1050**	270	1050	112	130	1090	129	1100	**130**	**1090**
508.namd_r	224	273	780	273	780	**273**	**780**	224	273	780	273	780	**273**	**780**
510.parest_r	224	**1505**	**389**	1509	388	1503	390	112	470	623	**471**	**622**	471	621
511.povray_r	224	**412**	**1270**	413	1270	411	1270	224	426	1230	423	1240	**423**	**1240**
519.lbm_r	224	**584**	**404**	584	404	584	404	224	**584**	**404**	584	404	584	404
521.wrf_r	224	846	593	846	593	**846**	**593**	112	376	668	**377**	**665**	379	663
526.blender_r	224	299	1140	300	1140	**300**	**1140**	224	299	1140	300	1140	**300**	**1140**
527.cam4_r	224	339	1160	**338**	**1160**	337	1160	224	339	1160	**339**	**1160**	337	1160
538.imagick_r	224	175	3180	**175**	**3170**	176	3170	224	175	3180	**175**	**3170**	176	3170
544.nab_r	224	190	1990	**190**	**1980**	190	1980	224	171	2200	**171**	**2200**	172	2200
549.fotonik3d_r	224	1555	561	1559	560	**1557**	**561**	224	1555	561	1559	560	**1557**	**561**
554.roms_r	224	**1158**	**307**	1155	308	1159	307	112	**526**	**338**	525	339	526	338

SPECrate®2017_fp_base = 961

SPECrate®2017_fp_peak = 1020

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
setterm -powersave off -blank 0
cpupower frequency-set -g performance
service irqbalance stop
echo 0 > /proc/sys/kernel/numa_balancing
echo 40 > /proc/sys/vm/dirty_ratio
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
Power Policy Quick Settings = Best Performance
SR-IOV Support = Disabled
SNC = Enable SNC4 (4-clusters)
Intel VT for Directed I/O (VT-d) = Enabled
Enable LP [Global] = Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sat Jan  7 00:51:02 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
```

(Continued on next page)

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
   x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   00:51:02 up 22:23,  1 user,  load average: 167.60, 210.15, 216.97
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/1    10.1.111.161     18:03    6:38m  1.08s  0.00s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4126540
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4126540
  virtual memory          (kbytes, -v) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/1
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
    --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8480+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0000c0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 56
    siblings        : 112
    2 physical ids (chips)
    224 processors (hardware threads)
    physical id 0: core ids 0-55
    physical id 1: core ids 0-55
    physical id 0: apicids 0-111
    physical id 1: apicids 128-239
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
```

(Continued on next page)

Platform Notes (Continued)

```
Byte Order:                      Little Endian
CPU(s):                          224
On-line CPU(s) list:             0-223
Vendor ID:                       GenuineIntel
Model name:                      Intel(R) Xeon(R) Platinum 8480+
CPU family:                      6
Model:                           143
Thread(s) per core:              2
Core(s) per socket:              56
Socket(s):                       2
Stepping:                        8
CPU max MHz:                     3800.0000
CPU min MHz:                     800.0000
BogoMIPS:                        4000.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                 tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                                 avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                 xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                 cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                 arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                                 ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                 enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                 amx_tile flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       5.3 MiB (112 instances)
L1i cache:                       3.5 MiB (112 instances)
L2 cache:                        224 MiB (112 instances)
L3 cache:                        210 MiB (2 instances)
NUMA node(s):                    8
NUMA node0 CPU(s):               0-13,112-125
NUMA node1 CPU(s):               14-27,126-139
NUMA node2 CPU(s):               28-41,140-153
NUMA node3 CPU(s):               42-55,154-167
NUMA node4 CPU(s):               56-69,168-181
NUMA node5 CPU(s):               70-83,182-195
NUMA node6 CPU(s):               84-97,196-209
NUMA node7 CPU(s):               98-111,210-223
Vulnerability Itlb multihit:     Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
   Vulnerability L1tf:                Not affected
   Vulnerability Mds:                 Not affected
   Vulnerability Meltdown:            Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:          Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
   Vulnerability Srbds:               Not affected
   Vulnerability Tsx async abort:     Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     5.3M   12 Data            1     64        1             64
      L1i       32K     3.5M    8 Instruction     1     64        1             64
      L2         2M      224M   16 Unified         2   2048        1             64
      L3       105M      210M   15 Unified         3 114688        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0-13,112-125
   node 0 size: 128623 MB
   node 0 free: 112066 MB
   node 1 cpus: 14-27,126-139
   node 1 size: 128982 MB
   node 1 free: 117779 MB
   node 2 cpus: 28-41,140-153
   node 2 size: 129016 MB
   node 2 free: 117779 MB
   node 3 cpus: 42-55,154-167
   node 3 size: 129016 MB
   node 3 free: 117800 MB
   node 4 cpus: 56-69,168-181
   node 4 size: 129016 MB
   node 4 free: 117609 MB
   node 5 cpus: 70-83,182-195
   node 5 size: 129016 MB
   node 5 free: 117705 MB
   node 6 cpus: 84-97,196-209
   node 6 size: 129016 MB
   node 6 free: 117804 MB
   node 7 cpus: 98-111,210-223
   node 7 size: 128969 MB
   node 7 free: 117717 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
     1:  12  10  12  12  21  21  21  21
     2:  12  12  10  12  21  21  21  21
     3:  12  12  12  10  21  21  21  21
     4:  21  21  21  21  10  12  12  12
     5:  21  21  21  21  12  10  12  12
     6:  21  21  21  21  12  12  10  12
     7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056420444 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jan 6 02:28

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                   irqbalance iscsi issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels
                     rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                     wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                     chronyd console-getty cups cups-browsed debug-shell dmraid-activation ebtables
                   exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init
                   iscsid iscsiuio issue-add-ssh-keys kexec-load lunmask man-db-create multipathd munge nfs
                   nfs-blkmap nmb ntp-wait ntpd rdisc rpcbind rpmconfigcheck rsyncd salt-minion serial-getty@
                   slurmd smartd_generate_opts smb snmpd snmptrapd svnserve systemd-boot-check-no-failures
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                     ypbind
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=9d5fa92c-859c-4d95-88c2-93940c809d39
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
```

(Continued on next page)

Platform Notes (Continued)

```
   pages_to_scan             4096
   scan_sleep_millisecs     10000

 ------------------------------------------------------------
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP4

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   1.0T   97G  927G  10% /

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:          Giga Computing
     Product:         R283-S91-AAE2-000
     Product Family: Server
     Serial:          0123456789012345678 9AB

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       GIGABYTE
    BIOS Version:      F06
    BIOS Date:         12/13/2022
    BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```


(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

549.fotonik3d_r: `-DSPEC_LP64`
554.roms_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

C++ benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html
http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-SPR-rev1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml
http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-SPR-rev1.0.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-06 11:51:02-0500.
Report generated on 2023-02-01 18:18:21 by CPU2017 PS formatter v6442.
Originally published on 2023-02-01.