SPEC CPU®2017 Floating Point Rate Result

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_fp_base =	938
SPECrate®2017_fp_energy_base =	910
SPECrate®2017_fp_peak =	Not Run
SPECrate®2017_fp_energy_peak =	Not Run

CPU2017 License:	19	**Test Date:**	Jan-2023
Test Sponsor:	Fujitsu	**Hardware Availability:**	Mar-2023
Tested by:	Fujitsu	**Software Availability:**	Jun-2022

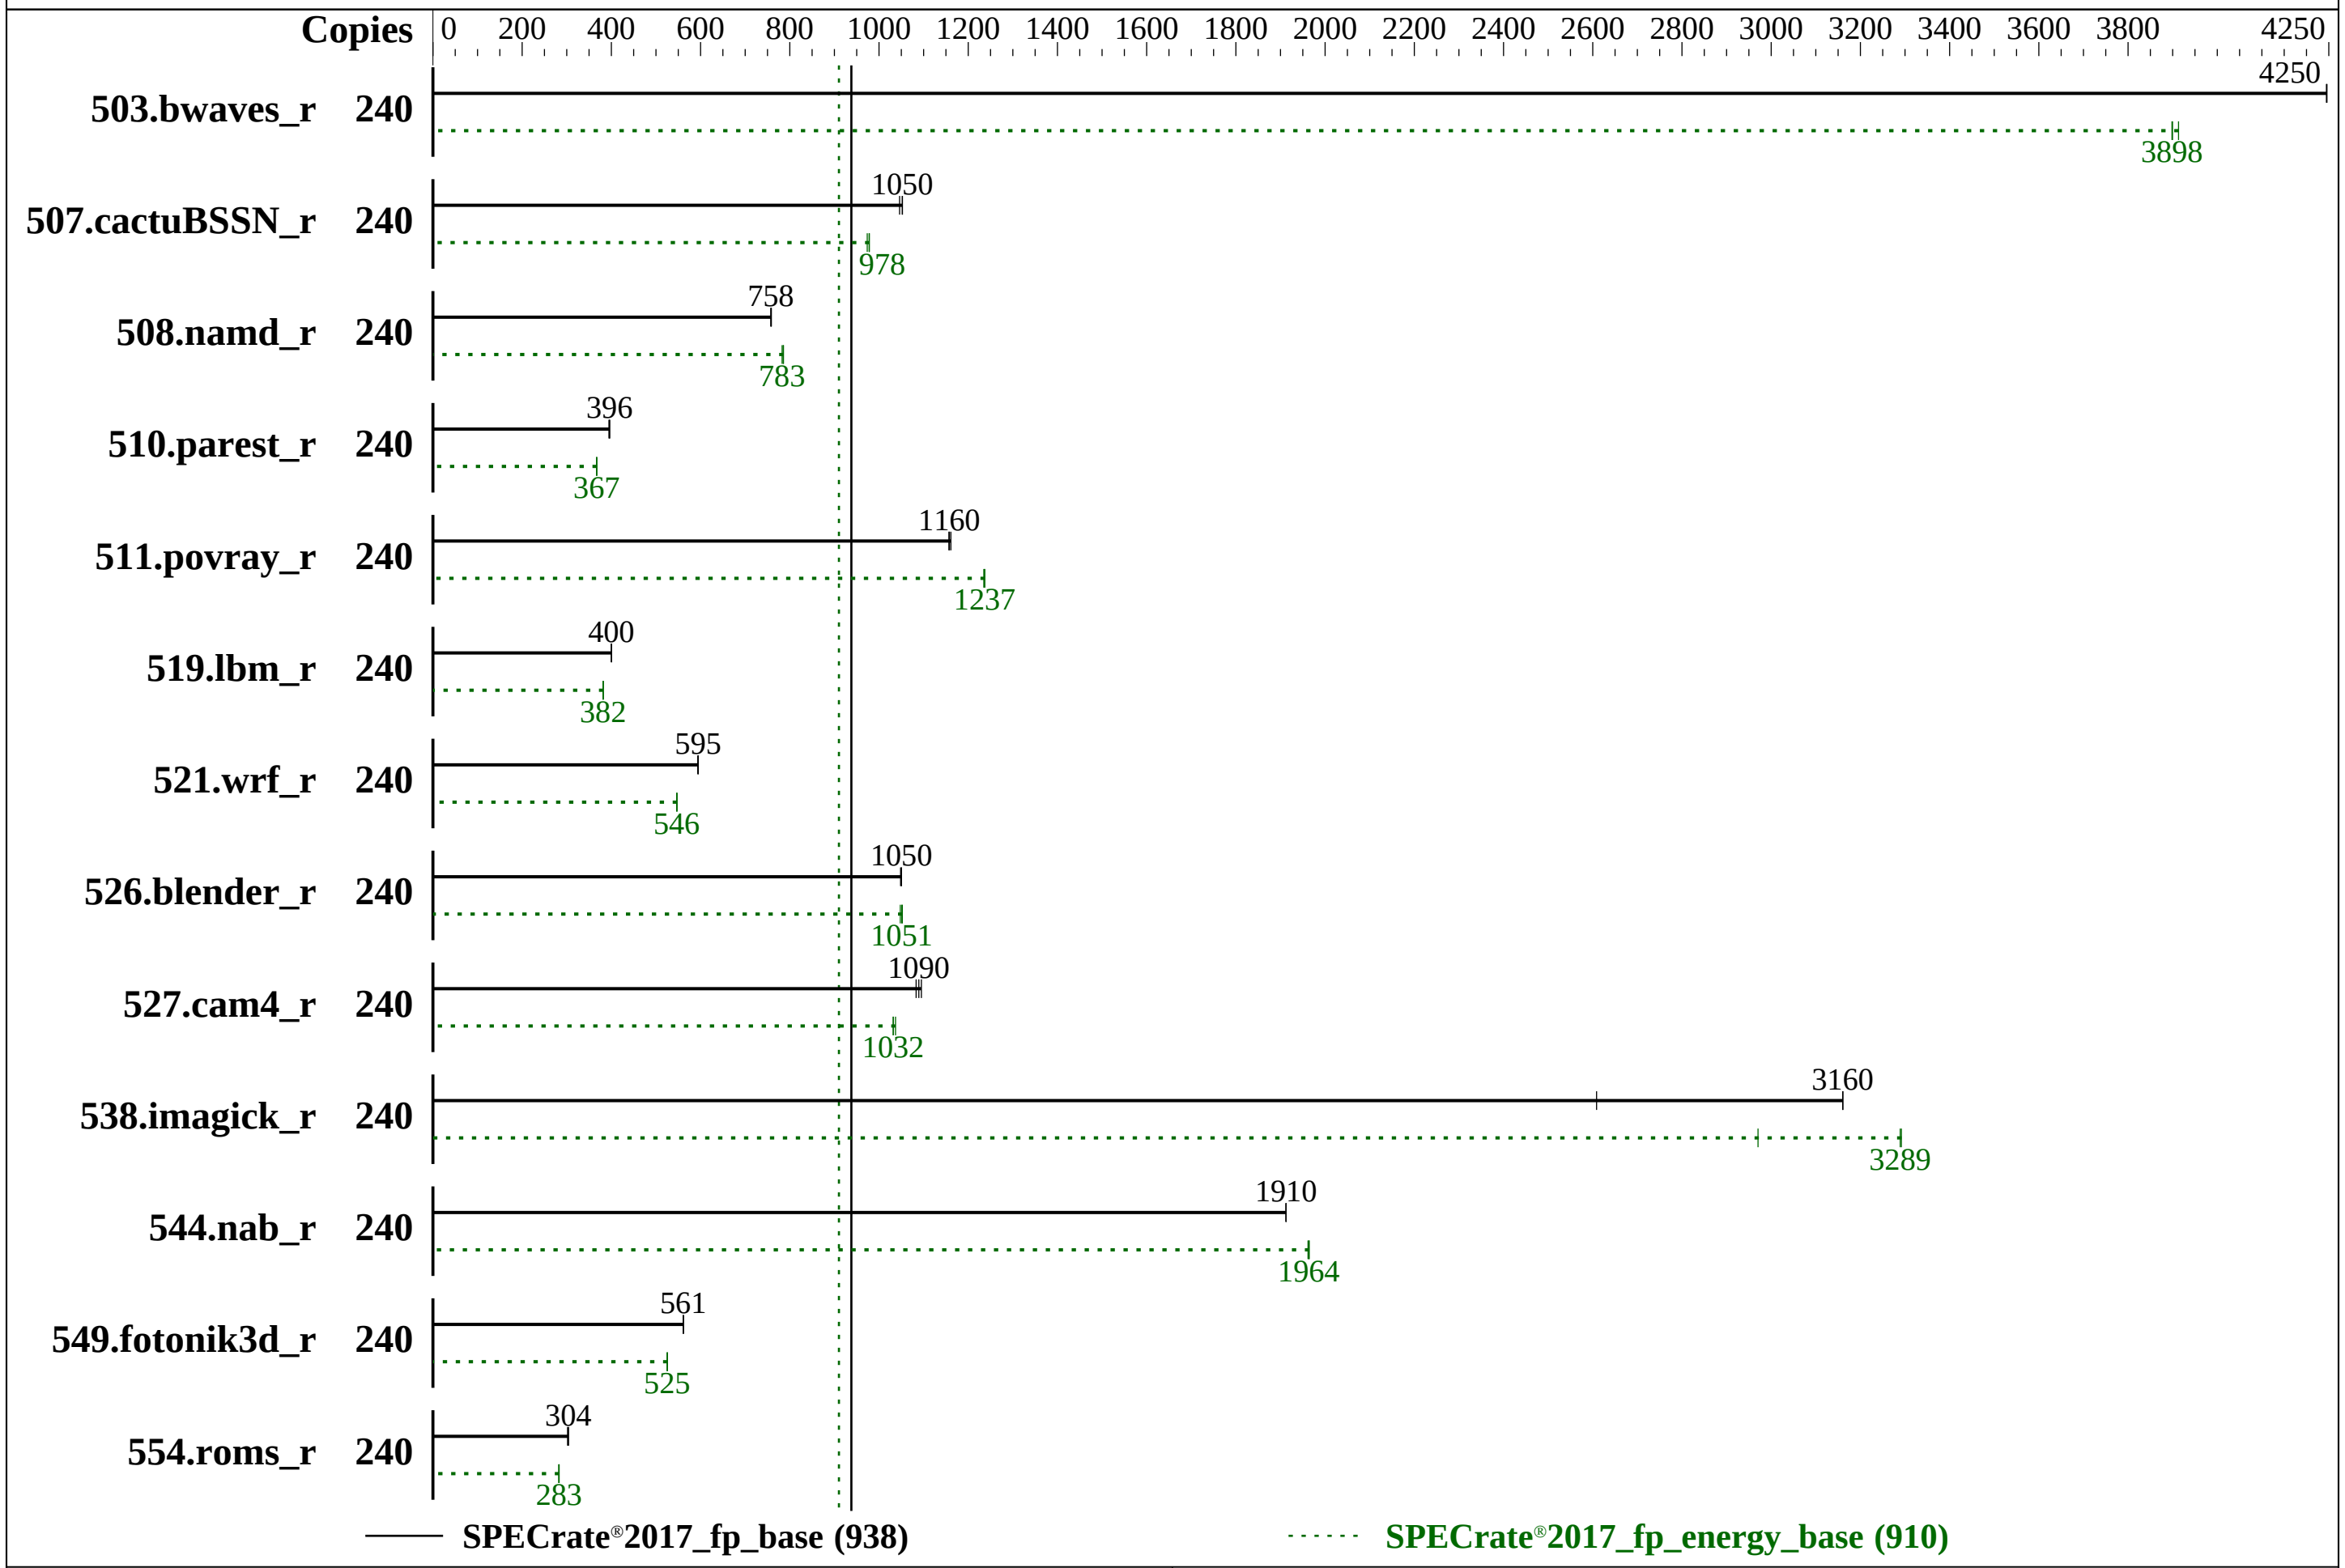

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	120 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x SATA SSD, 1.92TB
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Fujitsu BIOS Version V1.0.0.0 R1.10.0 for D3983-A1x. Released Mar-2023 tested as V1.0.0.0 R0.22.1 for D3983-A1x Jan-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1

(Continued on next page)

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_fp_base =	938
SPECrate®2017_fp_energy_base =	910
SPECrate®2017_fp_peak =	Not Run
SPECrate®2017_fp_energy_peak =	Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Software (Continued)

Power Management: BIOS set to prefer performance at the cost of additional power usage

Power

Max. Power (W): 1245.4
Idle Power (W): 322.57
Min. Temperature (C): 23.94
Elevation (m): 11
Line Standard: 200 V / 50 Hz / 1 phase / 2 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 2.00u for D3933-A1x of Fujitsu BMC Firmware
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 2200 W (non-redundant)
Details: Standard power supply part of base unit S26113-E646-V50-1
Backplane: 12 x 3.5inch HDD back plan
Other Storage: Embedded SATA Controller
Storage Model #s: S26361-F5776-E192
NICs Installed: 1 x Intel I210-T1 @ 1 Gb
NICs Enabled (FW/OS): 1 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: None

Power Analyzer

Power Analyzer: 10.118.163.191:8888
Hardware Vendor: Hioki
Model: Hioki PW3336:1-Channel
Serial Number: 170213562
Input Connection: USB via USB-Serial CH340
Metrology Institute: NICT
Calibration By: HIOKI E.E. CORPORATION
Calibration Label: H06400088
Calibration Date: 28-Jun-2022
PTDaemon® Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: Connected to PSU 1
Current Ranges Used: 10A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: 10.118.163.191:8889
Hardware Vendor: Digi International Inc.
Model: DigiWATCHPORT_H
Serial Number: W 640 45112
Input Connection: USB
PTDaemon Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: 5 mm in front of SUT main air intake

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
503.bwaves_r	240	567	4240	670	3910	1180	1230	**567**	**4250**	**673**	**3900**	**1190**	**1230**	567	4250	673	3900	1190	1240
507.cactuBSSN_r	240	**289**	**1050**	**341**	**978**	**1180**	**1220**	290	1050	343	974	1180	1210	289	1050	341	978	1180	1210
508.namd_r	240	301	758	316	786	1050	1120	**301**	**758**	**317**	**783**	**1060**	**1140**	301	759	317	785	1050	1130
510.parest_r	240	1591	395	1860	367	1170	1200	**1586**	**396**	**1860**	**367**	**1170**	**1200**	1585	396	1860	367	1170	1200
511.povray_r	240	**484**	**1160**	**492**	**1240**	**1020**	**1080**	485	1160	492	1230	1020	1080	483	1160	492	1240	1020	1080
519.lbm_r	240	632	400	753	382	1190	1230	632	400	754	381	1190	1250	**632**	**400**	**753**	**382**	**1190**	**1240**

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Fujitsu

PRIMERGY RX2540 M7, Intel Xeon Platinum 8490H, 1.90GHz

SPECrate®2017_fp_base =	938
SPECrate®2017_fp_energy_base =	910
SPECrate®2017_fp_peak =	Not Run
SPECrate®2017_fp_energy_peak =	Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu
Test Date: Jan-2023
Hardware Availability: Mar-2023
Software Availability: Jun-2022

Base Results Table (Continued)

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
521.wrf_r	240	905	594	1070	547	1190	1230	904	595	1070	547	1190	1240	**904**	**595**	**1070**	**546**	**1190**	**1240**
526.blender_r	240	349	1050	378	1050	1080	1190	348	1050	376	1050	1080	1180	**348**	**1050**	**377**	**1050**	**1080**	**1180**
527.cam4_r	240	**385**	**1090**	**443**	**1030**	**1150**	**1190**	383	1090	441	1040	1150	1200	388	1080	443	1030	1140	1200
538.imagick_r	240	189	3160	196	3290	1040	1180	**189**	**3160**	**197**	**3290**	**1040**	**1180**	229	2610	218	2970	951	1180
544.nab_r	240	**211**	**1910**	**223**	**1960**	**1060**	**1090**	211	1910	223	1960	1060	1100	211	1910	223	1960	1060	1110
549.fotonik3d_r	240	1667	561	1980	526	1190	1200	1666	561	1980	525	1190	1200	**1666**	**561**	**1980**	**525**	**1190**	**1200**
554.roms_r	240	1256	304	1490	283	1180	1200	**1256**	**304**	**1490**	**283**	**1180**	**1190**	1263	302	1490	282	1180	1200

SPECrate®2017_fp_base = 938

SPECrate®2017_fp_energy_base = 910

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu-1.1.8/lib/intel64:/home/Benchmark/speccpu-1.1.8
     /je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Package C State limit = C0
CPU Performance Boost = Aggressive
SNC (Sub NUMA) = Enable SNC4
FAN Control = Full
Optimized Power Mode = Enable

Sysinfo program /home/Benchmark/speccpu-1.1.8/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Sat Jan 14 06:32:09 2023

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Platinum 8490H
      2  "physical id"s (chips)
      240 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 60
      siblings  : 120
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
      25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
      53 54 55 56 57 58 59

From lscpu from util-linux 2.37.2:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Address sizes:                   46 bits physical, 57 bits virtual
     Byte Order:                      Little Endian
     CPU(s):                          240
```

(Continued on next page)

Platform Notes (Continued)

```
On-line CPU(s) list:             0-239
Vendor ID:                       GenuineIntel
Model name:                      Intel(R) Xeon(R) Platinum 8490H
CPU family:                      6
Model:                           143
Thread(s) per core:              2
Core(s) per socket:              60
Socket(s):                       2
Stepping:                        8
CPU max MHz:                     3500.0000
CPU min MHz:                     800.0000
BogoMIPS:                        3800.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       5.6 MiB (120 instances)
L1i cache:                       3.8 MiB (120 instances)
L2 cache:                        240 MiB (120 instances)
L3 cache:                        225 MiB (2 instances)
NUMA node(s):                    8
NUMA node0 CPU(s):               0-14,120-134
NUMA node1 CPU(s):               15-29,135-149
NUMA node2 CPU(s):               30-44,150-164
NUMA node3 CPU(s):               45-59,165-179
NUMA node4 CPU(s):               60-74,180-194
NUMA node5 CPU(s):               75-89,195-209
NUMA node6 CPU(s):               90-104,210-224
NUMA node7 CPU(s):               105-119,225-239
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
     Vulnerability Meltdown:          Not affected
     Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
     prctl and seccomp
     Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
     pointer sanitization
     Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
     filling
     Vulnerability Srbds:             Not affected
     Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.6M   12 Data            1     64        1             64
     L1i       32K     3.8M    8 Instruction     1     64        1             64
     L2         2M     240M   16 Unified         2   2048        1             64
     L3     112.5M     225M   15 Unified         3 122880        1             64

 /proc/cpuinfo cache data
    cache size : 115200 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 120 121 122 123 124 125 126 127 128 129
   130 131 132 133 134
   node 0 size: 128597 MB
   node 0 free: 127641 MB
   node 1 cpus: 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 135 136 137 138 139 140 141
   142 143 144 145 146 147 148 149
   node 1 size: 129016 MB
   node 1 free: 128571 MB
   node 2 cpus: 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 150 151 152 153 154 155 156
   157 158 159 160 161 162 163 164
   node 2 size: 128981 MB
   node 2 free: 128208 MB
   node 3 cpus: 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 165 166 167 168 169 170 171
   172 173 174 175 176 177 178 179
   node 3 size: 129016 MB
   node 3 free: 128587 MB
   node 4 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 180 181 182 183 184 185 186
   187 188 189 190 191 192 193 194
   node 4 size: 129016 MB
   node 4 free: 128625 MB
   node 5 cpus: 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 195 196 197 198 199 200 201
   202 203 204 205 206 207 208 209
```

(Continued on next page)

Platform Notes (Continued)

```
    node 5 size: 129016 MB
    node 5 free: 128708 MB
    node 6 cpus: 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 210 211 212 213 214 215
    216 217 218 219 220 221 222 223 224
    node 6 size: 129016 MB
    node 6 free: 128604 MB
    node 7 cpus: 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 225 226 227
    228 229 230 231 232 233 234 235 236 237 238 239
    node 7 size: 128647 MB
    node 7 free: 128202 MB
    node distances:
    node   0   1   2   3   4   5   6   7
      0:  10  12  12  12  21  21  21  21
      1:  12  10  12  12  21  21  21  21
      2:  12  12  10  12  21  21  21  21
      3:  12  12  12  10  21  21  21  21
      4:  21  21  21  21  10  12  12  12
      5:  21  21  21  21  12  10  12  12
      6:  21  21  21  21  12  12  10  12
      7:  21  21  21  21  12  12  12  10

  From /proc/meminfo
     MemTotal:       1056059684 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     powersave

  From /etc/*release* /etc/*version*
     os-release:
        NAME="SLES"
        VERSION="15-SP4"
        VERSION_ID="15.4"
        PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
        ID="sles"
        ID_LIKE="suse"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:15:sp4"

  uname -a:
     Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
     UTC 2022 (49db222/lp) x86_64 x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:
```

(Continued on next page)

Platform Notes (Continued)

```
CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                    Mitigation: Enhanced IBRS, IBPB:
                                                       conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 Jan 14 06:28

SPEC is set to: /home/Benchmark/speccpu-1.1.8
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda2      xfs   1.8T   76G  1.7T   5% /

From /sys/devices/virtual/dmi/id
    Vendor:         FUJITSU
    Product:        PRIMERGY RX2540 M7
    Product Family: SERVER
    Serial:         EWCExxxxxx

Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    10x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
    6x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

BIOS:
   BIOS Vendor:       FUJITSU
   BIOS Version:      V1.0.0.0 R0.22.1 for D3983-A1x
   BIOS Date:         12/01/2022
   BIOS Revision:     0.22
   Firmware Revision: 2.0

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C              | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++            | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C         | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran        | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.html
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-13 16:32:07-0500.
Report generated on 2023-02-01 18:28:11 by CPU2017 PS formatter v6442.
Originally published on 2023-02-01.