



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECSpeed®2017\_int\_base = 14.3

SPECSpeed®2017\_int\_peak = 14.5

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

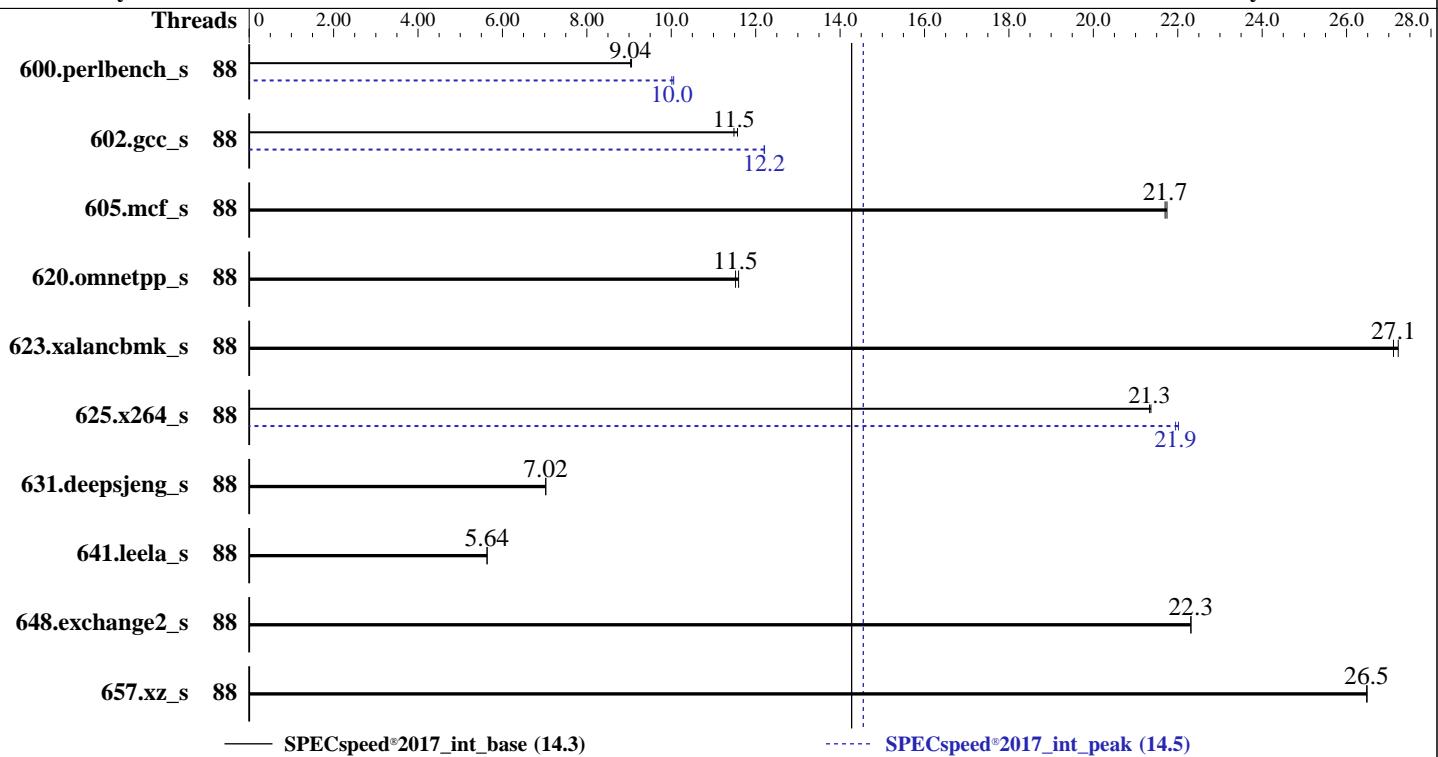

— SPECSpeed®2017\_int\_base (14.3)

- - - SPECSpeed®2017\_int\_peak (14.5)

## Hardware

CPU Name: Intel Xeon Platinum 8458P  
Max MHz: 3800  
Nominal: 2700  
Enabled: 88 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 82.5 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 125 GB on tmpfs  
Other: None

## OS:

SUSE Linux Enterprise Server 15 SP4

5.14.21-150400.22-default

Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;

Parallel:

Yes

Firmware:

Version 0.3.1 released Nov-2022

File System: tmpfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	88	<b>196</b>	<b>9.04</b>	196	9.06			88	<b>177</b>	<b>10.0</b>	176	10.1		
602.gcc_s	88	344	11.6	<b>347</b>	<b>11.5</b>			88	<b>326</b>	<b>12.2</b>	326	12.2		
605.mcf_s	88	217	21.7	<b>218</b>	<b>21.7</b>			88	217	21.7	<b>218</b>	<b>21.7</b>		
620.omnetpp_s	88	141	11.6	<b>142</b>	<b>11.5</b>			88	141	11.6	<b>142</b>	<b>11.5</b>		
623.xalancbmk_s	88	<b>52.3</b>	<b>27.1</b>	52.0	27.2			88	<b>52.3</b>	<b>27.1</b>	52.0	27.2		
625.x264_s	88	<b>82.7</b>	<b>21.3</b>	82.6	21.4			88	<b>80.4</b>	<b>21.9</b>	80.1	22.0		
631.deepsjeng_s	88	204	7.03	<b>204</b>	<b>7.02</b>			88	204	7.03	<b>204</b>	<b>7.02</b>		
641.leela_s	88	303	5.64	<b>303</b>	<b>5.64</b>			88	303	5.64	<b>303</b>	<b>5.64</b>		
648.exchange2_s	88	132	22.3	<b>132</b>	<b>22.3</b>			88	132	22.3	<b>132</b>	<b>22.3</b>		
657.xz_s	88	233	26.5	<b>234</b>	<b>26.5</b>			88	233	26.5	<b>234</b>	<b>26.5</b>		
SPECspeed®2017_int_base = 14.3														
SPECspeed®2017_int_peak = 14.5														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
        Logical Processor : Disabled
        Sub NUMA Cluster : 2-way Clustering
        Optimizer Mode : Enabled
```

```
    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
        C States : Autonomous
        Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
        PCI ASPM L1 Link
        Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Jan 12 02:04:02 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Platform Notes (Continued)

```
14. sysctl  
15. /sys/kernel/mm/transparent_hugepage  
16. /sys/kernel/mm/transparent_hugepage/khugepaged  
17. OS release  
18. Disk information  
19. /sys/devices/virtual/dmi/id  
20. dmidecode  
21. BIOS
```

---

```
1. uname -a  
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w  
02:04:02 up 3 min, 1 user, load average: 0.54, 0.21, 0.08  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 - 02:02 49.00s 0.92s 0.00s /bin/bash ./dell-norun-specspeed.sh  
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
```

---

```
3. Username  
From environment variable $USER: root
```

---

```
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4124611  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 4124611  
virtual memory           (kbytes, -v) unlimited  
file locks              (-x) unlimited
```

---

```
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 29  
login -- root  
-bash  
/bin/bash ./DELL_speed.sh  
/bin/bash ./dell-norun-main.sh speed  
/bin/bash ./dell-norun-main.sh speed  
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc  
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define  
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=88 --tune base,peak -o all --define  
intspeedaffinity --define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Platform Notes (Continued)

```
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=88 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode speed --tune base:peak --size refspeed intspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
```

```
-----  
6. /proc/cpuinfo  
model name      : Intel(R) Xeon(R) Platinum 8458P  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 143  
stepping        : 8  
microcode       : 0x2b000111  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores       : 44  
siblings         : 44  
2 physical ids (chips)  
88 processors (hardware threads)  
physical id 0: core ids 0-43  
physical id 1: core ids 0-43  
physical id 0: apicids  
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72  
,74,76,78,80,82,84,86  
physical id 1: apicids  
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1  
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         46 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                88  
On-line CPU(s) list:  0-87  
Vendor ID:             GenuineIntel  
Model name:            Intel(R) Xeon(R) Platinum 8458P  
CPU family:            6  
Model:                 143  
Thread(s) per core:   1  
Core(s) per socket:   44  
Socket(s):             2  
Stepping:              8  
BogoMIPS:              5400.00  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology  
nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor  
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2  
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm  
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Platform Notes (Continued)

```

cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmil hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
L1d cache: 4.1 MiB (88 instances)
L1i cache: 2.8 MiB (88 instances)
L2 cache: 176 MiB (88 instances)
L3 cache: 165 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.1M	12	Data	1	64	1	64
L1i	32K	2.8M	8	Instruction	1	64	1	64
L2	2M	176M	16	Unified	2	2048	1	64
L3	82.5M	165M	15	Unified	3	90112	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.  
available: 4 nodes (0-3)  
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84  
node 0 size: 257422 MB  
node 0 free: 249294 MB  
node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86  
node 1 size: 258042 MB  
node 1 free: 257707 MB  
node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85  
node 2 size: 258007 MB  
node 2 free: 257667 MB  
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87  
node 3 size: 257702 MB  
node 3 free: 257080 MB  
node distances:  
node 0 1 2 3  
0: 10 12 21 21  
1: 12 10 21 21  
2: 21 21 10 12  
3: 21 21 12 10

-----  
9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8458P)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = 14.5

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Jun-2022

## Platform Notes (Continued)

MemTotal: 1055923196 kB

-----  
10. who -r  
run-level 3 Jan 12 02:01

-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled apparmor auditd cron firewalld getty@ haveged irqbalance issue-generator kbdsettings kdump  
kdump-early lvm2-monitor postfix purge-kernels rollback sshd wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell  
ebtables grub2-once haveged-switch-root issue-add-ssh-keys kexec-load lunmask nfs  
nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd  
indirect wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=3b24f3a7-eacd-4a3a-aef5-ee833c654599  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=311M,high  
crashkernel=72M,low

-----  
14. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
15. /sys/kernel/mm/transparent\_hugepage

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Platform Notes (Continued)

```
defrag      always defer defer+advise [advise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag          1
max_ptes_none   511
max_ptes_shared 256
max_ptes_swap   64
pages_to_scan   4096
scan_sleep_millisecs 10000

-----
17. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

-----
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  125G  3.7G  122G  3% /mnt/ramdisk

-----
19. /sys/devices/virtual/dmi/id
Vendor:        Dell Inc.
Product:       PowerEdge C6620
Product Family: PowerEdge
Serial:        SL6C201

-----
20. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 15x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
 1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

-----
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:    Dell Inc.
BIOS Version:   0.3.1
BIOS Date:      11/24/2022
BIOS Revision:  0.3
```

## Compiler Version Notes

```
=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

=====  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)

=====  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-finite-math-only  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-finite-math-only  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-finite-math-only  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3  
-ffast-math -fno-finite-math-only  
-mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP  
-fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 14.3

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

## Peak Optimization Flags (Continued)

600.perlbench\_s (continued):

-ljemalloc

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.propdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8458P)

SPECspeed®2017\_int\_base = 14.3

SPECspeed®2017\_int\_peak = 14.5

CPU2017 License: 6573

Test Date: Jan-2023

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Jun-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-12 02:04:02-0500.

Report generated on 2024-01-29 17:21:37 by CPU2017 PDF formatter v6716.

Originally published on 2023-02-01.