SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = 1400

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2022
Hardware Availability: Dec-2022
Software Availability: Nov-2022

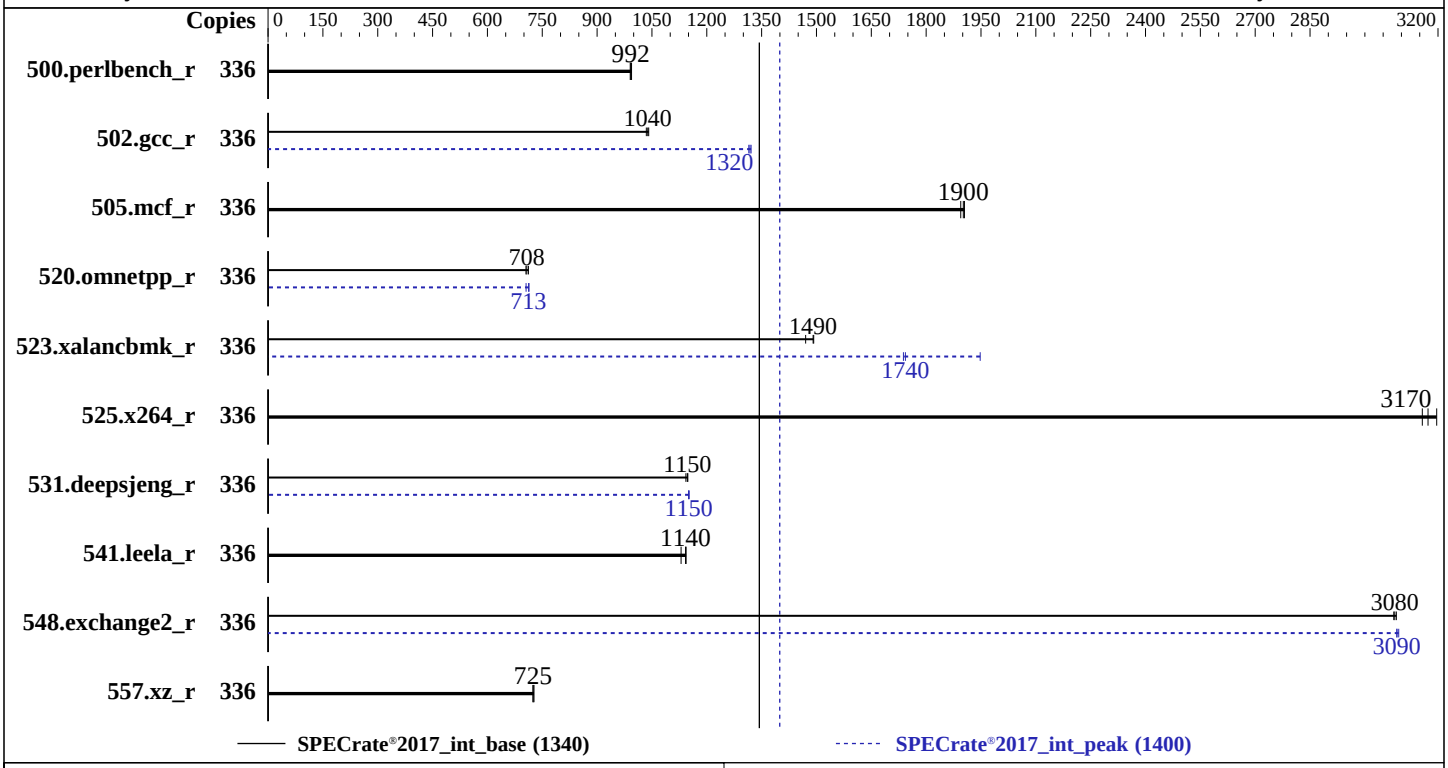

Hardware

CPU Name:	AMD EPYC 9634
Max MHz:	3700
Nominal:	2250
Enabled:	168 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Ubuntu 22.04.1 LTS Kernel 5.15.0-56-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version v1.12 11/24/2022 released Nov-2022
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL385 Gen11
(2.25 GHz, AMD EPYC 9634)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = 1400

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Dec-2022
Hardware Availability: Dec-2022
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	336	538	994	540	991	**539**	**992**	336	538	994	540	991	**539**	**992**
502.gcc_r	336	457	1040	460	1030	**458**	**1040**	336	360	1320	**361**	**1320**	362	1310
505.mcf_r	336	**286**	**1900**	287	1890	285	1900	336	**286**	**1900**	287	1890	285	1900
520.omnetpp_r	336	**623**	**708**	619	712	625	705	336	625	706	**618**	**713**	618	714
523.xalancbmk_r	336	241	1470	238	1490	**238**	**1490**	336	182	1950	**204**	**1740**	204	1740
525.x264_r	336	186	3160	184	3200	**185**	**3170**	336	186	3160	184	3200	**185**	**3170**
531.deepsjeng_r	336	335	1150	337	1140	**336**	**1150**	336	**335**	**1150**	335	1150	334	1150
541.leela_r	336	493	1130	**487**	**1140**	487	1140	336	493	1130	**487**	**1140**	487	1140
548.exchange2_r	336	285	3090	**286**	**3080**	286	3080	336	285	3090	285	3090	**285**	**3090**
557.xz_r	336	499	727	**501**	**725**	501	725	336	499	727	**501**	**725**	501	725

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = 1400

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017/amd_rate_a
     occ400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 Workload Profile set to General Throughput Compute
 Determinism Control set to Manual
   Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Four memory domains per socket
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode
```

(Continued on next page)

Platform Notes (Continued)

```
The system ROM used for this result contains microcode version 0xa10110e for the
AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this
ROM is version GenoaPI 1.0.0.1-L6

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on admin1 Mon Jun 27 18:41:10 2022

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 9634 84-Core Processor
       2  "physical id"s (chips)
       336 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 84
       siblings  : 168
       physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
       60 61 62 64 65 66 67 68 69 70 72 73 74 75 76 77 78 80 81 82 83 84 85 86 88 89 90 91
       92 93 94
       physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
       28 29 30 32 33 34 35 36 37 38 40 41 42 43 44 45 46 48 49 50 51 52 53 54 56 57 58 59
       60 61 62 64 65 66 67 68 69 70 72 73 74 75 76 77 78 80 81 82 83 84 85 86 88 89 90 91
       92 93 94

 From lscpu from util-linux 2.37.2:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   52 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          336
      On-line CPU(s) list:             0-335
      Vendor ID:                       AuthenticAMD
      Model name:                      AMD EPYC 9634 84-Core Processor
      CPU family:                      25
      Model:                           17
      Thread(s) per core:              2
      Core(s) per socket:              84
      Socket(s):                       2
      Stepping:                        1
      Frequency boost:                 enabled
      CPU max MHz:                     3701.0000
      CPU min MHz:                     400.0000
```

(Continued on next page)

Platform Notes (Continued)

```
BogoMIPS:                          4493.08
Flags:                             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:                    AMD-V
L1d cache:                         5.3 MiB (168 instances)
L1i cache:                         5.3 MiB (168 instances)
L2 cache:                          168 MiB (168 instances)
L3 cache:                          768 MiB (24 instances)
NUMA node(s):                      24
NUMA node0 CPU(s):                 0-6,168-174
NUMA node1 CPU(s):                 28-34,196-202
NUMA node2 CPU(s):                 56-62,224-230
NUMA node3 CPU(s):                 14-20,182-188
NUMA node4 CPU(s):                 42-48,210-216
NUMA node5 CPU(s):                 70-76,238-244
NUMA node6 CPU(s):                 21-27,189-195
NUMA node7 CPU(s):                 49-55,217-223
NUMA node8 CPU(s):                 77-83,245-251
NUMA node9 CPU(s):                 7-13,175-181
NUMA node10 CPU(s):                35-41,203-209
NUMA node11 CPU(s):                63-69,231-237
NUMA node12 CPU(s):                84-90,252-258
NUMA node13 CPU(s):                112-118,280-286
NUMA node14 CPU(s):                140-146,308-314
NUMA node15 CPU(s):                98-104,266-272
NUMA node16 CPU(s):                126-132,294-300
NUMA node17 CPU(s):                154-160,322-328
NUMA node18 CPU(s):                105-111,273-279
NUMA node19 CPU(s):                133-139,301-307
NUMA node20 CPU(s):                161-167,329-335
NUMA node21 CPU(s):                91-97,259-265
NUMA node22 CPU(s):                119-125,287-293
NUMA node23 CPU(s):                147-153,315-321
Vulnerability Itlb multihit:       Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Mmio stale data:   Not affected
      Vulnerability Retbleed:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl and seccomp
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW,
      STIBP always-on, RSB filling, PBRSB-eIBRS Not affected
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected

  From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K     5.3M    8 Data            1    64        1             64
      L1i       32K     5.3M    8 Instruction     1    64        1             64
      L2         1M     168M    8 Unified         2  2048        1             64
      L3        32M     768M   16 Unified         3 32768        1             64

  /proc/cpuinfo cache data
     cache size : 1024 KB

  From numactl --hardware
  WARNING: a numactl 'node' might or might not correspond to a physical chip.
    available: 24 nodes (0-23)
    node 0 cpus: 0 1 2 3 4 5 6 168 169 170 171 172 173 174
    node 0 size: 64198 MB
    node 0 free: 63774 MB
    node 1 cpus: 28 29 30 31 32 33 34 196 197 198 199 200 201 202
    node 1 size: 64473 MB
    node 1 free: 64089 MB
    node 2 cpus: 56 57 58 59 60 61 62 224 225 226 227 228 229 230
    node 2 size: 64508 MB
    node 2 free: 64170 MB
    node 3 cpus: 14 15 16 17 18 19 20 182 183 184 185 186 187 188
    node 3 size: 64508 MB
    node 3 free: 64281 MB
    node 4 cpus: 42 43 44 45 46 47 48 210 211 212 213 214 215 216
    node 4 size: 64508 MB
    node 4 free: 64283 MB
    node 5 cpus: 70 71 72 73 74 75 76 238 239 240 241 242 243 244
    node 5 size: 64508 MB
    node 5 free: 64243 MB
    node 6 cpus: 21 22 23 24 25 26 27 189 190 191 192 193 194 195
    node 6 size: 64508 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 6 free: 64280 MB
node 7 cpus: 49 50 51 52 53 54 55 217 218 219 220 221 222 223
node 7 size: 64508 MB
node 7 free: 64249 MB
node 8 cpus: 77 78 79 80 81 82 83 245 246 247 248 249 250 251
node 8 size: 64508 MB
node 8 free: 64297 MB
node 9 cpus: 7 8 9 10 11 12 13 175 176 177 178 179 180 181
node 9 size: 64508 MB
node 9 free: 64274 MB
node 10 cpus: 35 36 37 38 39 40 41 203 204 205 206 207 208 209
node 10 size: 64508 MB
node 10 free: 64277 MB
node 11 cpus: 63 64 65 66 67 68 69 231 232 233 234 235 236 237
node 11 size: 64508 MB
node 11 free: 64287 MB
node 12 cpus: 84 85 86 87 88 89 90 252 253 254 255 256 257 258
node 12 size: 64508 MB
node 12 free: 64307 MB
node 13 cpus: 112 113 114 115 116 117 118 280 281 282 283 284 285 286
node 13 size: 64508 MB
node 13 free: 64308 MB
node 14 cpus: 140 141 142 143 144 145 146 308 309 310 311 312 313 314
node 14 size: 64508 MB
node 14 free: 64281 MB
node 15 cpus: 98 99 100 101 102 103 104 266 267 268 269 270 271 272
node 15 size: 64508 MB
node 15 free: 64236 MB
node 16 cpus: 126 127 128 129 130 131 132 294 295 296 297 298 299 300
node 16 size: 64508 MB
node 16 free: 64243 MB
node 17 cpus: 154 155 156 157 158 159 160 322 323 324 325 326 327 328
node 17 size: 64508 MB
node 17 free: 64234 MB
node 18 cpus: 105 106 107 108 109 110 111 273 274 275 276 277 278 279
node 18 size: 64508 MB
node 18 free: 64324 MB
node 19 cpus: 133 134 135 136 137 138 139 301 302 303 304 305 306 307
node 19 size: 64508 MB
node 19 free: 64291 MB
node 20 cpus: 161 162 163 164 165 166 167 329 330 331 332 333 334 335
node 20 size: 64508 MB
node 20 free: 64313 MB
node 21 cpus: 91 92 93 94 95 96 97 259 260 261 262 263 264 265
node 21 size: 64508 MB
node 21 free: 64303 MB
node 22 cpus: 119 120 121 122 123 124 125 287 288 289 290 291 292 293
```

(Continued on next page)

Platform Notes (Continued)

```
node 22 size: 64508 MB
node 22 free: 64313 MB
node 23 cpus: 147 148 149 150 151 152 153 315 316 317 318 319 320 321
node 23 size: 64450 MB
node 23 free: 64260 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19
20  21  22  23
  0:  10  11  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  1:  11  10  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  2:  11  11  10  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  3:  12  12  12  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  4:  12  12  12  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  5:  12  12  12  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  6:  12  12  12  12  12  12  10  11  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  7:  12  12  12  12  12  12  11  10  11  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  8:  12  12  12  12  12  12  11  11  10  12  12  12  32  32  32  32  32  32  32  32
  32  32  32  32
  9:  12  12  12  12  12  12  12  12  12  10  11  11  32  32  32  32  32  32  32  32
  32  32  32  32
 10:  12  12  12  12  12  12  12  12  12  11  10  11  32  32  32  32  32  32  32  32
 32  32  32  32
 11:  12  12  12  12  12  12  12  12  12  11  11  10  32  32  32  32  32  32  32  32
 32  32  32  32
 12:  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  12  12  12  12  12
 12  12  12  12
 13:  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  12  12  12  12  12
 12  12  12  12
 14:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  12  12  12  12  12
 12  12  12  12
 15:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  11  11  12  12
 12  12  12  12
 16:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  10  11  12  12
 12  12  12  12
 17:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  11  10  12  12
 12  12  12  12
 18:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
 11  12  12  12
 19:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10
```

(Continued on next page)

Platform Notes (Continued)

```
    11  12  12  12
    20:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11
    10  12  12  12
    21:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
    12  10  11  11
    22:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
    12  11  10  11
    23:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12
    12  11  11  10

  From /proc/meminfo
     MemTotal:       1584947680 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /sbin/tuned-adm active
      Current active profile: throughput-performance

  /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
     performance

  /usr/bin/lsb_release -d
     Ubuntu 22.04.1 LTS

  From /etc/*release* /etc/*version*
     debian_version: bookworm/sid
     os-release:
        PRETTY_NAME="Ubuntu 22.04.1 LTS"
        NAME="Ubuntu"
        VERSION_ID="22.04"
        VERSION="22.04.1 LTS (Jammy Jellyfish)"
        VERSION_CODENAME=jammy
        ID=ubuntu
        ID_LIKE=debian
        HOME_URL="https://www.ubuntu.com/"

  uname -a:
     Linux admin1 5.15.0-56-generic #62-Ubuntu SMP Tue Nov 22 19:54:14 UTC 2022 x86_64
     x86_64 x86_64 GNU/Linux

  Kernel self-reported vulnerability status:

  CVE-2018-12207 (iTLB Multihit):                          Not affected
  CVE-2018-3620 (L1 Terminal Fault):                       Not affected
  Microarchitectural Data Sampling:                        Not affected
  CVE-2017-5754 (Meltdown):                                Not affected
  mmio_stale_data:                                         Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
retbleed:                                          Not affected
CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
                                                   Bypass disabled via prctl and
                                                   seccomp
CVE-2017-5753 (Spectre variant 1):                 Mitigation: usercopy/swapgs
                                                   barriers and __user pointer
                                                   sanitization
CVE-2017-5715 (Spectre variant 2):                 Mitigation: Retpolines, IBPB:
                                                   conditional, IBRS_FW, STIBP:
                                                   always-on, RSB filling,
                                                   PBRSB-eIBRS: Not affected
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):           Not affected

run-level 5 Jun 27 18:31

SPEC is set to: /home/cpu2017
   Filesystem                     Type  Size  Used Avail Use% Mounted on
   /dev/mapper/ubuntu--vg-ubuntu--lv ext4  437G   34G  385G   8% /

From /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL385 Gen11
    Product Family: ProLiant
    Serial:         DL385GEN11-003

Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
interpret this section. The 'dmidecode' program reads system data which is "intended to
allow hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  Memory:
    13x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800
    11x Hynix HMCG94MEBRA123N 64 GB 2 rank 4800

BIOS:
   BIOS Vendor:       HPE
   BIOS Version:      1.12
   BIOS Date:         11/24/2022
   BIOS Revision:     1.12
   Firmware Revision: 1.10

(End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-lamdalloc-ext

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64

(Continued on next page)

Peak Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100

(Continued on next page)

Peak Optimization Flags (Continued)

523.xalancbmk_r (continued):
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext

531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

541.leela_r: basepeak = yes

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

C++ benchmarks (except as noted below):
-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html
http://www.spec.org/cpu2017/flags/aocc400-flags.2023-02-15.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.2023-02-15.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-27 14:41:10-0400.
Report generated on 2023-02-15 10:31:20 by CPU2017 PS formatter v6442.
Originally published on 2023-02-14.