SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R750 (Intel Xeon Gold 5318Y, 2.10 GHz)

SPECrate®2017_int_base = 332

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: May-2021
Software Availability: Jun-2022

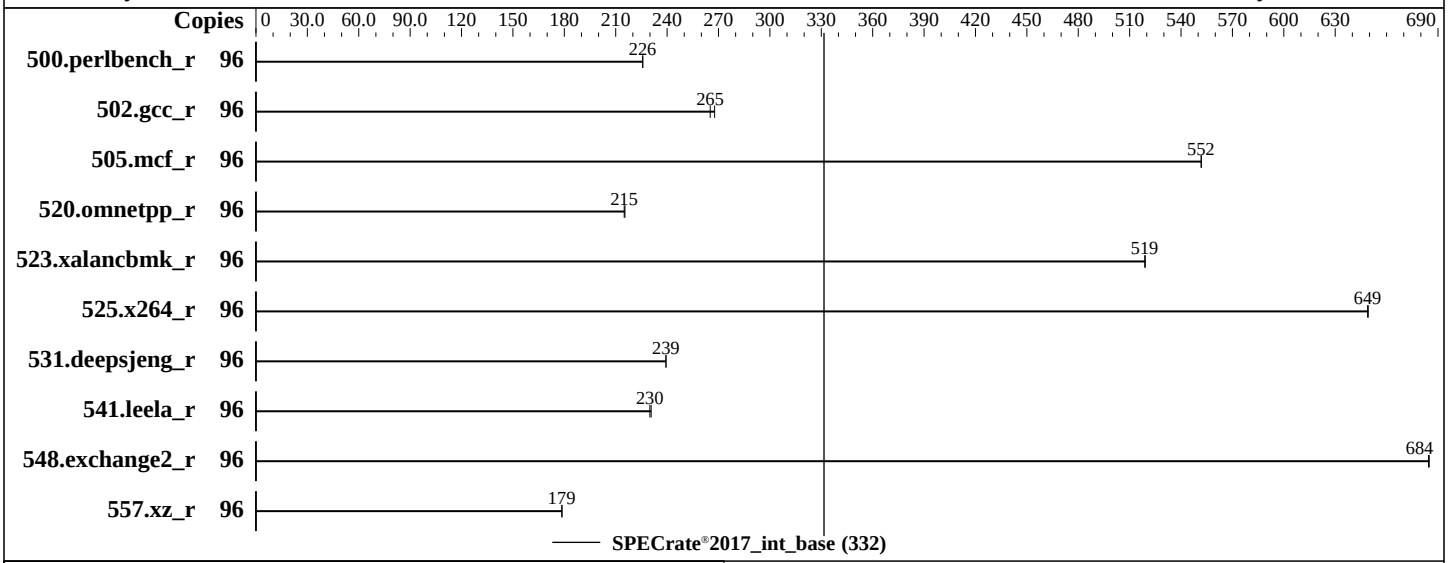

Hardware

CPU Name:	Intel Xeon Gold 5318Y
Max MHz:	3400
Nominal:	2100
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	36 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.9.2 released Nov-2022
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R750 (Intel Xeon Gold 5318Y, 2.10 GHz)

SPECrate®2017_int_base = 332

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: May-2021
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	677	226	**677**	**226**									
502.gcc_r	96	**513**	**265**	508	268									
505.mcf_r	96	281	552	**281**	**552**									
520.omnetpp_r	96	**586**	**215**	585	215									
523.xalancbmk_r	96	**195**	**519**	195	519									
525.x264_r	96	**259**	**649**	259	649									
531.deepsjeng_r	96	460	239	**460**	**239**									
541.leela_r	96	**691**	**230**	689	231									
548.exchange2_r	96	367	685	**367**	**684**									
557.xz_r	96	580	179	**581**	**179**									

SPECrate®2017_int_base = 332

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/ia32:/mnt/ram
     disk/cpu2017-1.1.8-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
     Virtualization Technology : Disabled
              Sub NUMA Cluster : 2-way Clustering
       DCU Streamer Prefetcher : Disabled
                  LLC Prefetch : Disabled
           Dead Line LLC Alloc : Disabled
                Optimizer Mode : Enabled

                System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                      C States : Autonomous
           Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Thu Jan 12 19:09:42 2023

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 5318Y CPU @ 2.10GHz
      2  "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 10 11 12 13 14 15 16 17 18 19 20 21 22 23
      physical 1: cores 0 1 10 11 12 13 14 15 16 17 18 19 20 21 22 23
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu from util-linux 2.37.2:
     Architecture:                    x86_64
     CPU op-mode(s):                  32-bit, 64-bit
     Address sizes:                   46 bits physical, 57 bits virtual
     Byte Order:                      Little Endian
     CPU(s):                          96
     On-line CPU(s) list:             0-95
     Vendor ID:                       GenuineIntel
     Model name:                      Intel(R) Xeon(R) Gold 5318Y CPU @ 2.10GHz
     CPU family:                      6
     Model:                           106
     Thread(s) per core:              2
     Core(s) per socket:              24
     Socket(s):                       2
     Stepping:                        6
     CPU max MHz:                     3400.0000
     CPU min MHz:                     800.0000
     BogoMIPS:                        4200.00
     Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
     pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
     pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
     nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3
     sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
     tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
     epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
     tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq
     rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw
     avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
     cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
     hwp_epp hwp_pkg_req avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
     avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig
     flush_l1d arch_capabilities
     L1d cache:                       2.3 MiB (48 instances)
     L1i cache:                       1.5 MiB (48 instances)
     L2 cache:                        60 MiB (48 instances)
     L3 cache:                        72 MiB (2 instances)
     NUMA node(s):                    4
     NUMA node0 CPU(s):
     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
     NUMA node1 CPU(s):
     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
     NUMA node2 CPU(s):
     1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
     NUMA node3 CPU(s):
     3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
     Vulnerability Itlb multihit:     Not affected
     Vulnerability L1tf:              Not affected
     Vulnerability Mds:               Not affected
     Vulnerability Meltdown:          Not affected
     Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
     prctl and seccomp
     Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
     pointer sanitization
     Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB
     filling
     Vulnerability Srbds:             Not affected
     Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
```

(Continued on next page)

Platform Notes (Continued)

```
      L1d       48K     2.3M   12 Data            1    64        1             64
      L1i       32K     1.5M    8 Instruction     1    64        1             64
      L2       1.3M      60M   20 Unified         2  1024        1             64
      L3        36M      72M   12 Unified         3 49152        1             64

   /proc/cpuinfo cache data
      cache size : 36864 KB

   From numactl --hardware
   WARNING: a numactl 'node' might or might not correspond to a physical chip.
     available: 4 nodes (0-3)
     node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92
     node 0 size: 128410 MB
     node 0 free: 127683 MB
     node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
     node 1 size: 129017 MB
     node 1 free: 128649 MB
     node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93
     node 2 size: 129017 MB
     node 2 free: 121267 MB
     node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
     node 3 size: 128954 MB
     node 3 free: 128500 MB
     node distances:
     node   0   1   2   3
       0:  10  11  20  20
       1:  11  10  20  20
       2:  20  20  10  11
       3:  20  20  11  10

   From /proc/meminfo
      MemTotal:       527770268 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
      performance

   From /etc/*release* /etc/*version*
      os-release:
         NAME="SLES"
         VERSION="15-SP4"
         VERSION_ID="15.4"
         PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
         ID="sles"
         ID_LIKE="suse"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:15:sp4"

   uname -a:
      Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
      UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

   Kernel self-reported vulnerability status:

   CVE-2018-12207 (iTLB Multihit):                    Not affected
   CVE-2018-3620 (L1 Terminal Fault):                 Not affected
   Microarchitectural Data Sampling:                  Not affected
   CVE-2017-5754 (Meltdown):                          Not affected
   CVE-2018-3639 (Speculative Store Bypass):          Mitigation: Speculative Store
```

(Continued on next page)

Platform Notes (Continued)

```
                                                  Bypass disabled via prctl and
                                                  seccomp
 CVE-2017-5753 (Spectre variant 1):               Mitigation: usercopy/swapgs
                                                  barriers and __user pointer
                                                  sanitization
 CVE-2017-5715 (Spectre variant 2):               Mitigation: Enhanced IBRS, IBPB:
                                                  conditional, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):         Not affected

 run-level 5 Jan 12 18:55

 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
    Filesystem     Type   Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  125G  3.6G  122G   3% /mnt/ramdisk

 From /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R750
     Product Family: PowerEdge
     Serial:         3Z6GMH3

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     16x 00CE063200CE M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933

 BIOS:
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.9.2
    BIOS Date:         11/17/2022
    BIOS Revision:     1.9

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-12 20:09:41-0500.
Report generated on 2024-01-29 17:22:18 by CPU2017 PS formatter v6716.
Originally published on 2023-02-14.