SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 783

SPECrate®2017_fp_peak = 827

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

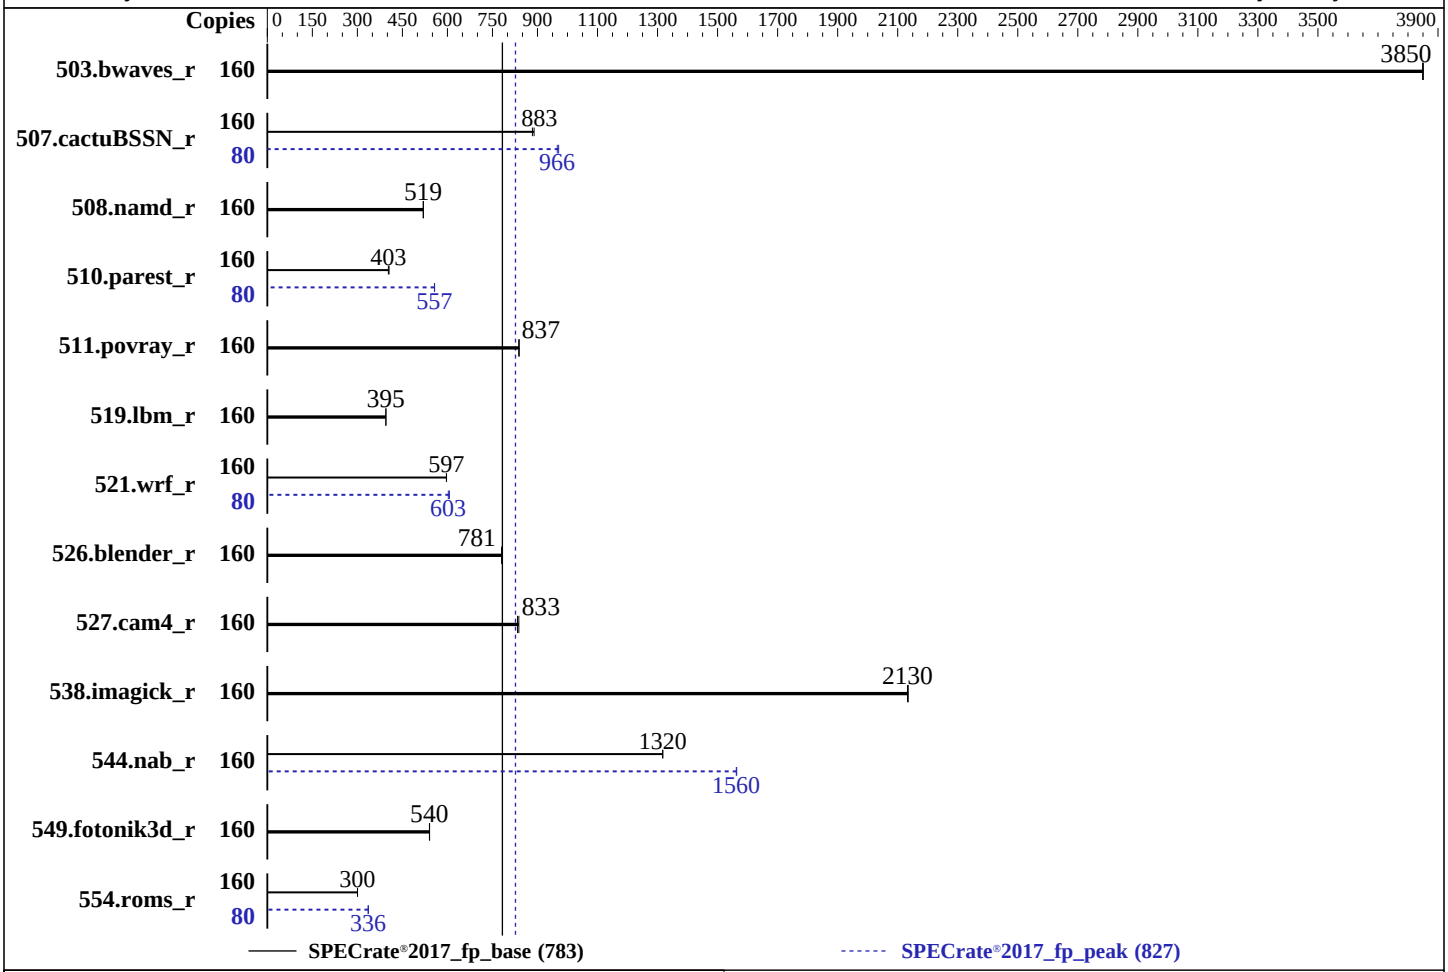

Hardware

CPU Name:	Intel Xeon Platinum 8460Y+
Max MHz:	3700
Nominal:	2000
Enabled:	80 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	125 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.6 (Ootpa) 4.18.0-372.9.1.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.0.1 released Dec-2022
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8460Y+)

SPECrate®2017_fp_base = 783

SPECrate®2017_fp_peak = 827

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Jan-2023
Hardware Availability: Feb-2023
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	417	3850	**417**	**3850**			160	417	3850	**417**	**3850**		
507.cactuBSSN_r	160	228	889	**229**	**883**			80	104	971	**105**	**966**		
508.namd_r	160	**293**	**519**	292	520			160	**293**	**519**	292	520		
510.parest_r	160	**1038**	**403**	1032	406			80	376	557	**376**	**557**		
511.povray_r	160	**446**	**837**	445	839			160	**446**	**837**	445	839		
519.lbm_r	160	**427**	**395**	427	395			160	**427**	**395**	427	395		
521.wrf_r	160	**601**	**597**	600	597			80	**297**	**603**	295	606		
526.blender_r	160	312	781	**312**	**781**			160	312	781	**312**	**781**		
527.cam4_r	160	**336**	**833**	334	838			160	**336**	**833**	334	838		
538.imagick_r	160	**187**	**2130**	186	2140			160	**187**	**2130**	186	2140		
544.nab_r	160	**204**	**1320**	204	1320			160	**172**	**1560**	172	1560		
549.fotonik3d_r	160	1153	541	**1155**	**540**			160	1153	541	**1155**	**540**		
554.roms_r	160	**847**	**300**	846	301			80	377	337	**379**	**336**		

SPECrate®2017_fp_base = 783

SPECrate®2017_fp_peak = 827

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
     1.9-ic2022.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                 ADDDC Setting : Disabled
       DIMM Self Healing on
   Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
             Sub NUMA Cluster : 4-way Clustering
      DCU Streamer Prefetcher : Disabled
                  LLC Prefetch : Disabled
          Dead Line LLC Alloc : Disabled
               Optimizer Mode : Enabled

               System Profile : Custom
         CPU Power Management : Maximum Performance
                          C1E : Disabled
                    C States : Autonomous
          Memory Patrol Scrub : Disabled
     Energy Efficiency Policy : Performance
           PCI ASPM L1 Link
             Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jan 13 17:57:02 2023

SUT (System Under Test) info as seen by some common utilities.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-58.el8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64
   x86_64 GNU/Linux

------------------------------------------------------------
2. w
    17:57:02 up  4:37,  1 user,  load average: 114.15, 149.08, 155.76
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                13:26    4:28m  1.35s  0.00s /bin/bash ./dell-norun-specrate.sh
  --iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 4. ulimit -a
   core file size          (blocks, -c) 0
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 4126062
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4126062
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

 ------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 18
  login -- root
  -bash
  /bin/bash ./DELL_rate.sh
  /bin/bash ./dell-norun-main.sh rate
  /bin/bash ./dell-norun-main.sh rate
  /bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
    Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
  /bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
    Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=160 -c
    ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=80 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
    --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc fprate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=160 --configfile
    ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=80 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
    --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
    --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1

 ------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Platinum 8460Y+
     vendor_id       : GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
     cpu family      : 6
     model           : 143
     stepping        : 8
     microcode       : 0x2b000161
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 40
     siblings        : 80
     2 physical ids (chips)
     160 processors (hardware threads)
     physical id 0: core ids 0-39
     physical id 1: core ids 0-39
     physical id 0: apicids 0-79
     physical id 1: apicids 128-207
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.32.1:
   Architecture:        x86_64
   CPU op-mode(s):      32-bit, 64-bit
   Byte Order:          Little Endian
   CPU(s):              160
   On-line CPU(s) list: 0-159
   Thread(s) per core:  2
   Core(s) per socket:  40
   Socket(s):           2
   NUMA node(s):        8
   Vendor ID:           GenuineIntel
   BIOS Vendor ID:      Intel
   CPU family:          6
   Model:               143
   Model name:          Intel(R) Xeon(R) Platinum 8460Y+
   BIOS Model name:     Intel(R) Xeon(R) Platinum 8460Y+
   Stepping:            8
   CPU MHz:             2000.000
   BogoMIPS:            4000.00
   L1d cache:           48K
   L1i cache:           32K
   L2 cache:            2048K
   L3 cache:            107520K
   NUMA node0 CPU(s):   0,4,8,12,16,20,24,28,32,36,80,84,88,92,96,100,104,108,112,116
   NUMA node1 CPU(s):   40,44,48,52,56,60,64,68,72,76,120,124,128,132,136,140,144,148,152,156
   NUMA node2 CPU(s):   2,6,10,14,18,22,26,30,34,38,82,86,90,94,98,102,106,110,114,118
   NUMA node3 CPU(s):   42,46,50,54,58,62,66,70,74,78,122,126,130,134,138,142,146,150,154,158
   NUMA node4 CPU(s):   1,5,9,13,17,21,25,29,33,37,81,85,89,93,97,101,105,109,113,117
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node5 CPU(s):   41,45,49,53,57,61,65,69,73,77,121,125,129,133,137,141,145,149,153,157
  NUMA node6 CPU(s):    3,7,11,15,19,23,27,31,35,39,83,87,91,95,99,103,107,111,115,119
  NUMA node7 CPU(s):   43,47,51,55,59,63,67,71,75,79,123,127,131,135,139,143,147,151,155,159
  Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                       acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                       arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf
                       tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16
                       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                       f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                       invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
                       avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                       clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                       xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                       avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
                       avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57
                       rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                       tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0,4,8,12,16,20,24,28,32,36,80,84,88,92,96,100,104,108,112,116
  node 0 size: 128472 MB
  node 0 free: 114287 MB
  node 1 cpus: 40,44,48,52,56,60,64,68,72,76,120,124,128,132,136,140,144,148,152,156
  node 1 size: 129019 MB
  node 1 free: 119745 MB
  node 2 cpus: 2,6,10,14,18,22,26,30,34,38,82,86,90,94,98,102,106,110,114,118
  node 2 size: 129019 MB
  node 2 free: 120208 MB
  node 3 cpus: 42,46,50,54,58,62,66,70,74,78,122,126,130,134,138,142,146,150,154,158
  node 3 size: 129019 MB
  node 3 free: 118822 MB
  node 4 cpus: 1,5,9,13,17,21,25,29,33,37,81,85,89,93,97,101,105,109,113,117
  node 4 size: 129019 MB
  node 4 free: 121229 MB
  node 5 cpus: 41,45,49,53,57,61,65,69,73,77,121,125,129,133,137,141,145,149,153,157
  node 5 size: 128977 MB
  node 5 free: 121416 MB
  node 6 cpus: 3,7,11,15,19,23,27,31,35,39,83,87,91,95,99,103,107,111,115,119
  node 6 size: 129019 MB
  node 6 free: 121401 MB
  node 7 cpus: 43,47,51,55,59,63,67,71,75,79,123,127,131,135,139,143,147,151,155,159
  node 7 size: 129007 MB
  node 7 free: 121449 MB
  node distances:
```

(Continued on next page)

Platform Notes (Continued)

```
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056312172 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jan 13 13:20

------------------------------------------------------------
11. Systemd service manager version: systemd 239 (239-58.el8)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE     UNIT FILES
  enabled   NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd autovt@ crond
            firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump
            loadmodules lvm2-monitor mdmonitor microcode multipathd nis-domainname rhsmcertd rsyslog
            selinux-autorelabel-mark sshd sssd syslog timedatex tuned udisks2
  disabled  blk-availability chrony-wait chronyd cni-dhcp console-getty cpupower debug-shell ebtables
            hwloc-dump-hwdata iprdump iprinit iprupdate ipsec iscsid iscsiuio kvm_stat
          man-db-restart-cache-update nftables podman podman-auto-update podman-restart rdisc rhcd rhsm
            rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcsd
  indirect  sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
  masked    systemd-timedated

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd3,gpt4)/vmlinuz-4.18.0-372.9.1.el8.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness         0
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_swap             64
  pages_to_scan           4096
  scan_sleep_millisecs   10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 8.6 (Ootpa)
  redhat-release Red Hat Enterprise Linux release 8.6 (Ootpa)
  system-release Red Hat Enterprise Linux release 8.6 (Ootpa)

------------------------------------------------------------
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
  itlb_multihit        Not affected
  l1tf                 Not affected
  mds                  Not affected
  meltdown             Not affected
  spec_store_bypass    Mitigation: Speculative Store Bypass disabled via prctl and seccomp
  spectre_v1           Mitigation: usercopy/swapgs barriers and __user pointer sanitization
  spectre_v2           Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
  srbds                Not affected
  tsx_async_abort      Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
     https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

------------------------------------------------------------
21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  125G   66G   60G  53% /mnt/ramdisk

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge C6620
    Product Family: PowerEdge

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.0.1
    BIOS Date:         12/27/2022
    BIOS Revision:     1.0
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                 | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C       | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops`

(Continued on next page)

Peak Optimization Flags (Continued)

544.nab_r (continued):
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-01-13 18:57:02-0500.
Report generated on 2023-02-15 10:38:12 by CPU2017 PS formatter v6442.
Originally published on 2023-02-14.