SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECspeed®2017_fp_base =	245
SPECspeed®2017_fp_energy_base =	946
SPECspeed®2017_fp_peak =	250
SPECspeed®2017_fp_energy_peak =	961

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Apr-2023
Software Availability: Nov-2022

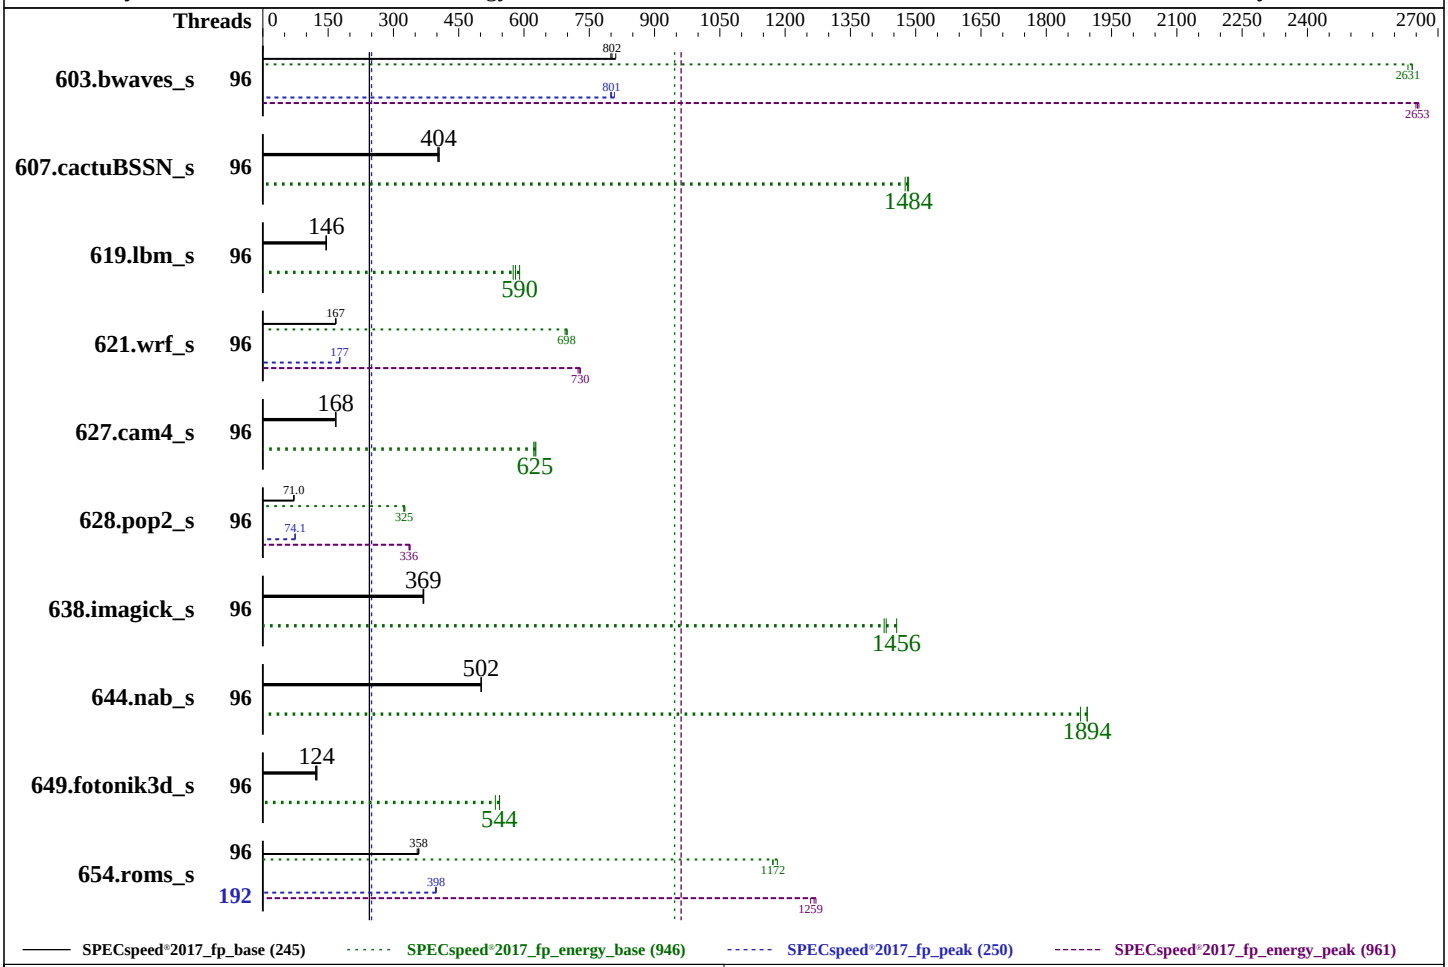

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	96 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) Kernel 5.14.0-70.22.1.el9_0.x86_64
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Lenovo BIOS Version KAE105L 1.20 released Dec-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to balance power and performance

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR655 V3
2.40 GHz, AMD EPYC 9654

SPECspeed®2017_fp_base =	245
SPECspeed®2017_fp_energy_base =	946
SPECspeed®2017_fp_peak =	250
SPECspeed®2017_fp_energy_peak =	961

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jan-2023
Hardware Availability: Apr-2023
Software Availability: Nov-2022

Power

Max. Power (W): 391.2
Idle Power (W): 88.67
Min. Temperature (C): 22.56
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 1.30 of KAX311A
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 1800 W (non-redundant)
Details: 4P57A78359
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #s: 4XB7A17107
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: 6 x Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UG05013E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GRG METROLOGY & TEST (BEIJING) CO., LTD.
Calibration Label: J202210116758A-0007
Calibration Date: 19-Oct-2022
PTDaemon® Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: Connected to PSU1
Current Ranges Used: 5A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W63390099
Input Connection: USB
PTDaemon Version: 1.9.2 (3976349f; 2020-12-08)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	96	73.8	800	24.4	2640	330	340	72.8	811	24.4	2640	335	343	**73.5**	**802**	**24.5**	**2630**	**333**	**342**
607.cactuBSSN_s	96	41.2	405	12.4	1480	300	323	41.5	402	12.3	1480	297	328	**41.2**	**404**	**12.3**	**1480**	**298**	**324**
619.lbm_s	96	35.9	146	10.2	581	286	318	**35.9**	**146**	**10.1**	**590**	**281**	**311**	36.1	145	10.3	575	286	320
621.wrf_s	96	79.1	167	20.8	695	263	267	78.8	168	20.7	699	262	267	**79.0**	**167**	**20.7**	**698**	**262**	**267**
627.cam4_s	96	52.8	168	15.5	622	293	323	**52.9**	**168**	**15.4**	**625**	**292**	**321**	53.1	167	15.4	627	290	323
628.pop2_s	96	**167**	**71.0**	**40.2**	**325**	**240**	**244**	167	71.0	40.3	324	241	244	166	71.6	40.0	326	241	245
638.imagick_s	96	39.2	368	11.0	1430	281	337	**39.1**	**369**	**10.8**	**1460**	**276**	**336**	39.0	370	11.0	1430	281	337
644.nab_s	96	34.8	502	10.0	1890	288	316	34.8	502	10.1	1880	291	315	**34.8**	**502**	**10.0**	**1890**	**288**	**315**
649.fotonik3d_s	96	75.2	121	19.2	534	255	298	**73.7**	**124**	**18.8**	**544**	**255**	**299**	73.4	124	18.8	544	256	299
654.roms_s	96	**44.0**	**358**	**15.0**	**1170**	**342**	**360**	44.4	355	15.0	1170	338	360	43.9	358	14.9	1180	339	363

SPECspeed®2017_fp_base = 245

SPECspeed®2017_fp_energy_base = 946

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
603.bwaves_s	96	**73.6**	**801**	**24.3**	**2650**	**329**	**348**	73.0	808	24.2	2660	332	347	73.8	799	24.3	2650	329	338
607.cactuBSSN_s	96	41.2	405	12.4	1480	300	323	41.5	402	12.3	1480	297	328	**41.2**	**404**	**12.3**	**1480**	**298**	**324**
619.lbm_s	96	35.9	146	10.2	581	286	318	**35.9**	**146**	**10.1**	**590**	**281**	**311**	36.1	145	10.3	575	286	320
621.wrf_s	96	75.1	176	19.9	724	265	269	**74.8**	**177**	**19.8**	**730**	**264**	**269**	74.8	177	19.8	728	265	270
627.cam4_s	96	52.8	168	15.5	622	293	323	**52.9**	**168**	**15.4**	**625**	**292**	**321**	53.1	167	15.4	627	290	323
628.pop2_s	96	160	74.3	38.6	338	241	245	160	74.0	38.8	337	241	245	**160**	**74.1**	**38.9**	**336**	**242**	**246**
638.imagick_s	96	39.2	368	11.0	1430	281	337	**39.1**	**369**	**10.8**	**1460**	**276**	**336**	39.0	370	11.0	1430	281	337
644.nab_s	96	34.8	502	10.0	1890	288	316	34.8	502	10.1	1880	291	315	**34.8**	**502**	**10.0**	**1890**	**288**	**315**
649.fotonik3d_s	96	75.2	121	19.2	534	255	298	**73.7**	**124**	**18.8**	**544**	**255**	**299**	73.4	124	18.8	544	256	299
654.roms_s	192	39.5	398	13.9	1270	352	380	39.7	397	13.9	1270	349	374	**39.5**	**398**	**14.0**	**1260**	**354**	**380**

SPECspeed®2017_fp_peak = **250**

SPECspeed®2017_fp_energy_peak = **961**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd_speed_aocc400_genoa_B_lib
     /lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 96 1 97 2 98 3 99 4 100 5 101 6 102 7 103 8 104 9 105
     10 106 11 107 12 108 13 109 14 110 15 111 16 112 17 113 18 114 19 115 20
     116 21 117 22 118 23 119 24 120 25 121 26 122 27 123 28 124 29 125 30
     126 31 127 32 128 33 129 34 130 35 131 36 132 37 133 38 134 39 135 40
     136 41 137 42 138 43 139 44 140 45 141 46 142 47 143 48 144 49 145 50
     146 51 147 52 148 53 149 54 150 55 151 56 152 57 153 58 154 59 155 60
     156 61 157 62 158 63 159 64 160 65 161 66 162 67 163 68 164 69 165 70
     166 71 167 72 168 73 169 74 170 75 171 76 172 77 173 78 174 79 175 80
```

(Continued on next page)

Environment Variables Notes (Continued)

```
    176 81 177 82 178 83 179 84 180 85 181 86 182 87 183 88 184 89 185 90
    186 91 187 92 188 93 189 94 190 95 191"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Operating Mode set to Custom Mode
Determinism Slider set to Power
Core Performance Boost set to Disabled
DF P-states set to P1

 Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
 running on localhost.localdomain Sun Jan 29 03:29:14 2023

 SUT (System Under Test) info as seen by some common utilities.
 For more information on this section, see
    https://www.spec.org/cpu2017/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : AMD EPYC 9654 96-Core Processor
       1  "physical id"s (chips)
       192 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The following
    excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
       cpu cores : 96
       siblings  : 192
       physical 0: cores 0 1 2 3 4 5 6 7 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
       26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53
       54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81
```

(Continued on next page)

Platform Notes (Continued)

```
       82 83 84 85 86 87 88 89 90 91 92 93 94 95

 From lscpu from util-linux 2.37.4:
      Architecture:                    x86_64
      CPU op-mode(s):                  32-bit, 64-bit
      Address sizes:                   52 bits physical, 57 bits virtual
      Byte Order:                      Little Endian
      CPU(s):                          192
      On-line CPU(s) list:             0-191
      Vendor ID:                       AuthenticAMD
      BIOS Vendor ID:                  Advanced Micro Devices, Inc.
      Model name:                      AMD EPYC 9654 96-Core Processor
      BIOS Model name:                 AMD EPYC 9654 96-Core Processor
      CPU family:                      25
      Model:                           17
      Thread(s) per core:              2
      Core(s) per socket:              96
      Socket(s):                       1
      Stepping:                        1
      Frequency boost:                 disabled
      CPU max MHz:                     3707.8120
      CPU min MHz:                     1500.0000
      BogoMIPS:                        4792.57
      Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
      pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
      pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
     aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
     popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
      misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
      bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
      ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
      avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
      cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
      lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
      pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
      avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
      rdpid overflow_recov succor smca fsrm flush_l1d
      Virtualization:                  AMD-V
      L1d cache:                       3 MiB (96 instances)
      L1i cache:                       3 MiB (96 instances)
      L2 cache:                        96 MiB (96 instances)
      L3 cache:                        384 MiB (12 instances)
      NUMA node(s):                    1
      NUMA node0 CPU(s):               0-191
```

(Continued on next page)

Platform Notes (Continued)

```
      Vulnerability Itlb multihit:     Not affected
      Vulnerability L1tf:              Not affected
      Vulnerability Mds:               Not affected
      Vulnerability Meltdown:          Not affected
      Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
      prctl
      Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user
      pointer sanitization
      Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW,
      STIBP always-on, RSB filling
      Vulnerability Srbds:             Not affected
      Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       3M    8 Data            1    64        1             64
      L1i       32K       3M    8 Instruction     1    64        1             64
      L2         1M      96M    8 Unified         2  2048        1             64
      L3        32M     384M   16 Unified         3 32768        1             64

/proc/cpuinfo cache data
   cache size : 1024 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
  28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
  57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85
  86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110
  111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132
  133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154
  155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176
  177 178 179 180 181 182 183 184 185 186 187 188 189 190 191
  node 0 size: 386485 MB
  node 0 free: 383417 MB
  node distances:
  node   0
    0:  10

From /proc/meminfo
   MemTotal:       395761164 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB
```

(Continued on next page)

Platform Notes (Continued)

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="9.0 (Plow)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="9.0"
      PLATFORM_ID="platform:el9"
      PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
   system-release: Red Hat Enterprise Linux release 9.0 (Plow)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

uname -a:
   Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2
   10:02:12 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
CVE-2018-3639 (Speculative Store Bypass):              Mitigation: Speculative Store
                                                       Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):                     Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
CVE-2017-5715 (Spectre variant 2):                     Mitigation: Retpolines, IBPB:
                                                       conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort):               Not affected

run-level 3 Jan 28 16:32

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   372G   19G  354G   5% /home

From /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
     Vendor:          Lenovo
     Product:         ThinkSystem SR655V3
     Product Family: ThinkSystem
     Serial:          1234567890

  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you
  interpret this section. The 'dmidecode' program reads system data which is "intended to
  allow hardware to be accurately determined", but the intent may not be met, as there are
  frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
    Memory:
      6x SK Hynix HMCG88AEBRA115N 32 GB 2 rank 4800
      6x SK Hynix HMCG88AEBRA168N 32 GB 2 rank 4800

  BIOS:
     BIOS Vendor:       Lenovo
     BIOS Version:      KAE105L-1.20
     BIOS Date:         12/29/2022
     BIOS Revision:     1.20
     Firmware Revision: 1.30

  (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                | 654.roms_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

654.roms_s: `Same as 603.bwaves_s`

Benchmarks using both Fortran and C:

621.wrf_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt -O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

627.cam4_s: `basepeak = yes`

628.pop2_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt -Mrecursive -fvector-transform -fscalar-transform -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.html`
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.xml`
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-28 14:29:13-0500.
Report generated on 2023-03-03 16:49:55 by CPU2017 PS formatter v6442.
Originally published on 2023-02-23.