SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(3.60 GHz, Intel Xeon Gold 6444Y)

SPECrate®2017_fp_base = 507

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

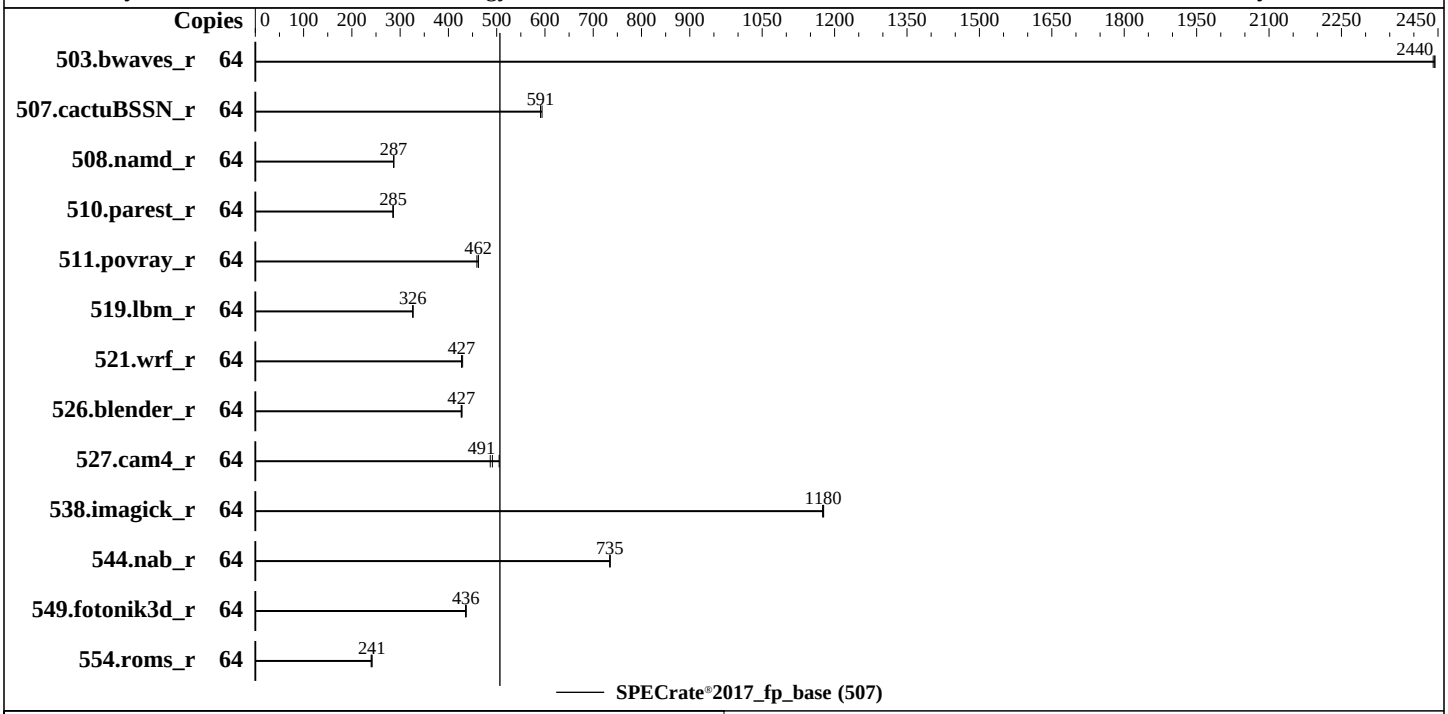

Hardware

CPU Name:	Intel Xeon Gold 6444Y
Max MHz:	4000
Nominal:	3600
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	45 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64) Kernel 5.14.21-150400.22-default
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version USE109N 1.12 released Jan-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD650 V3
(3.60 GHz, Intel Xeon Gold 6444Y)

SPECrate®2017_fp_base = 507

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	**263**	**2440**	263	2440	263	2440							
507.cactuBSSN_r	64	**137**	**591**	137	591	136	594							
508.namd_r	64	**212**	**287**	212	286	212	287							
510.parest_r	64	**586**	**285**	586	286	587	285							
511.povray_r	64	323	462	**323**	**462**	326	459							
519.lbm_r	64	207	326	**207**	**326**	207	327							
521.wrf_r	64	334	429	336	427	**336**	**427**							
526.blender_r	64	228	427	**228**	**427**	228	428							
527.cam4_r	64	222	505	230	487	**228**	**491**							
538.imagick_r	64	135	1180	**135**	**1180**	135	1180							
544.nab_r	64	147	734	**147**	**735**	147	735							
549.fotonik3d_r	64	571	437	573	435	**572**	**436**							
554.roms_r	64	**422**	**241**	421	242	424	240							

SPECrate®2017_fp_base = 507

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.9-ic2022.1/lib/intel64:/home/cpu2017-1.1.9-ic2022.1/j
     e5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
```

(Continued on next page)

General Notes (Continued)

```
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
SNC set to SNC2
MONITOR/MWAIT set to Enabled
XPT Prefetcher set to Disabled
LLC Prefetch set to Disabled

 Sysinfo program /home/cpu2017-1.1.9-ic2022.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Thu Feb  2 17:18:38 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)

Platform Notes (Continued)

```
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -a
   Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
   x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
 2. w
    17:18:38 up 4 min,  1 user,  load average: 0.08, 0.05, 0.01
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                17:15    2.00s  0.80s  0.00s -bash

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 2062622
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 2062622
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 30
  login -- root
  -bash
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
    ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=32 --define physicalfirst
     --define invoke_with_interleave --define drop_caches --tune base -o all fprate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
    ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=32 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
     rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
     $SPEC/tmp/CPU2017.006/templogs/preenv.fprate.006.0.log --lognum 006.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /home/cpu2017-1.1.9-ic2022.1

------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Gold 6444Y
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 8
     microcode       : 0x2b000161
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 16
     siblings        : 32
     2 physical ids (chips)
     64 processors (hardware threads)
     physical id 0: core ids 0-15
     physical id 1: core ids 0-15
     physical id 0: apicids 0-31
     physical id 1: apicids 128-159
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          64
   On-line CPU(s) list:             0-63
```

(Continued on next page)

Platform Notes (Continued)

```
   Vendor ID:                       GenuineIntel
   Model name:                      Intel(R) Xeon(R) Gold 6444Y
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              16
   Socket(s):                       2
   Stepping:                        8
   BogoMIPS:                        7200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                                    avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                    cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                    arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                    vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                    bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                    tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       1.5 MiB (32 instances)
   L1i cache:                       1 MiB (32 instances)
   L2 cache:                        64 MiB (32 instances)
   L3 cache:                        90 MiB (2 instances)
   NUMA node(s):                    4
   NUMA node0 CPU(s):               0-7,32-39
   NUMA node1 CPU(s):               8-15,40-47
   NUMA node2 CPU(s):               16-23,48-55
   NUMA node3 CPU(s):               24-31,56-63
   Vulnerability Itlb multihit:     Not affected
   Vulnerability L1tf:              Not affected
   Vulnerability Mds:               Not affected
   Vulnerability Meltdown:          Not affected
   Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
   Vulnerability Srbds:             Not affected
   Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
```

(Continued on next page)

Platform Notes (Continued)

```
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       48K     1.5M   12 Data            1    64        1             64
      L1i       32K       1M    8 Instruction     1    64        1             64
      L2         2M      64M   16 Unified         2  2048        1             64
      L3        45M      90M   15 Unified         3 49152        1             64

  ------------------------------------------------------------
  8. numactl --hardware
  NOTE: a numactl 'node' might or might not correspond to a physical chip.
    available: 4 nodes (0-3)
    node 0 cpus: 0-7,32-39
    node 0 size: 128649 MB
    node 0 free: 127958 MB
    node 1 cpus: 8-15,40-47
    node 1 size: 129019 MB
    node 1 free: 128564 MB
    node 2 cpus: 16-23,48-55
    node 2 size: 129019 MB
    node 2 free: 128587 MB
    node 3 cpus: 24-31,56-63
    node 3 size: 128991 MB
    node 3 free: 128183 MB
    node distances:
    node   0   1   2   3
      0:  10  12  21  21
      1:  12  10  21  21
      2:  21  21  10  12
      3:  21  21  12  10

  ------------------------------------------------------------
  9. /proc/meminfo
     MemTotal:       528055972 kB

  ------------------------------------------------------------
  10. who -r
    run-level 3 Feb 2 17:14

  ------------------------------------------------------------
  11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
    Default Target  Status
    multi-user      running

  ------------------------------------------------------------
  12. Services, from systemctl list-unit-files
    STATE            UNIT FILES
    enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                     irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels
```

(Continued on next page)

Platform Notes (Continued)

```
                  rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                    wickedd-nanny
   enabled-runtime  systemd-remount-fs
   disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                    chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
                    lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
                    serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
   indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
   root=UUID=5f8bfd2f-a83f-41d5-8917-33e974e2f5bd
   splash=silent
   mitigations=auto
   quiet
   security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
   analyzing CPU 0:
     Unable to determine current policy
     boost state support:
       Supported: yes
       Active: yes

------------------------------------------------------------
15. tuned-adm active
   It seems that tuned daemon is not running, preset profile is not activated.
   Preset profile: powersave

------------------------------------------------------------
16. sysctl
   kernel.numa_balancing              1
   kernel.randomize_va_space          2
   vm.compaction_proactiveness       20
   vm.dirty_background_bytes          0
   vm.dirty_background_ratio         10
   vm.dirty_bytes                     0
   vm.dirty_expire_centisecs       3000
   vm.dirty_ratio                    20
   vm.dirty_writeback_centisecs     500
   vm.dirtytime_expire_seconds    43200
   vm.extfrag_threshold             500
   vm.min_unmapped_ratio              1
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2022.1
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda3      xfs   889G   35G  854G   4% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SD650 V3
    Product Family: ThinkSystem
    Serial:         9999999999

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
```

(Continued on next page)

Platform Notes (Continued)

```
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      USE109N-1.12
    BIOS Date:         01/09/2023
    BIOS Revision:     1.12
    Firmware Revision: 0.90
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.html
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-N.xml
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-02 04:18:38-0500.
Report generated on 2023-03-02 11:23:20 by CPU2017 PS formatter v6442.
Originally published on 2023-02-28.