# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11
(4.10 GHz, AMD EPYC 9174F)

**SPECrate®2017_int_base = 218**

**SPECrate®2017_int_peak = 222**

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Feb-2023
**Hardware Availability:** Nov-2022
**Software Availability:** Nov-2022

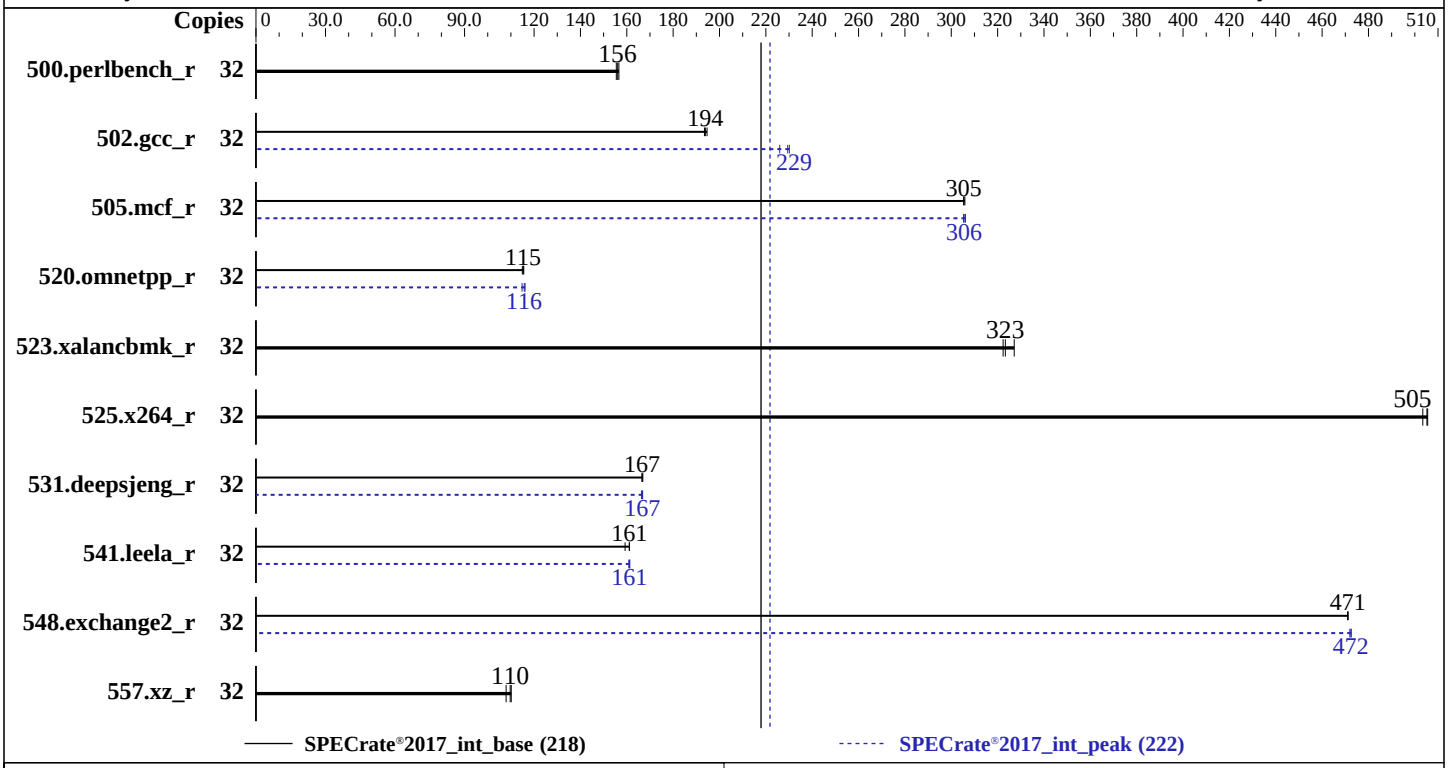


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 9174F |
| Max MHz: | 4400 |
| Nominal: | 4100 |
| Enabled: | 16 cores, 1 chip, 2 threads/core |
| Orderable: | 1 chip |
| Cache L1: | 32 KB I + 32 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 32 MB shared / 2 cores |
| Other: | None |
| Memory: | 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R) |
| Storage: | 1 x 1.6 TB NVMe SSD, RAID 0 |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Ubuntu 22.04.1 LTS<br>Kernel 5.15.0-53-generic |
| Compiler: | C/C++/Fortran: Version 4.0.0 of AOCC |
| Parallel: | No |
| Firmware: | HPE BIOS Version v1.12 11/24/2022 released Nov-2022 |
| File System: | ext4 |
| System State: | Run level 5 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 32/64-bit |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 32 | 328 | 155 | **326** | **156** | 325 | 157 | 32 | 328 | 155 | **326** | **156** | 325 | 157 |
| 502.gcc_r | 32 | 234 | 194 | **234** | **194** | 233 | 195 | 32 | 201 | 226 | **197** | **229** | 197 | 230 |
| 505.mcf_r | 32 | 169 | 306 | **169** | **305** | 169 | 305 | 32 | 169 | 306 | 169 | 305 | **169** | **306** |
| 520.omnetpp_r | 32 | 365 | 115 | **364** | **115** | 363 | 116 | 32 | 362 | 116 | 366 | 115 | **363** | **116** |
| 523.xalancbmk_r | 32 | 103 | 327 | **105** | **323** | 105 | 322 | 32 | 103 | 327 | **105** | **323** | 105 | 322 |
| 525.x264_r | 32 | 111 | 506 | **111** | **505** | 111 | 503 | 32 | 111 | 506 | **111** | **505** | 111 | 503 |
| 531.deepsjeng_r | 32 | 220 | 167 | 220 | 167 | **220** | **167** | 32 | 220 | 167 | 220 | 166 | **220** | **167** |
| 541.leela_r | 32 | 329 | 161 | **329** | **161** | 333 | 159 | 32 | 329 | 161 | 329 | 161 | **329** | **161** |
| 548.exchange2_r | 32 | 178 | 471 | **178** | **471** | 178 | 471 | 32 | 177 | 473 | 178 | 472 | **177** | **472** |
| 557.xz_r | 32 | 314 | 110 | 320 | 108 | **315** | **110** | 32 | 314 | 110 | 320 | 108 | **315** | **110** |

**SPECrate®2017_int_base = 218**

**SPECrate®2017_int_peak = 222**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc400_genoa_B_lib/lib:/home/cpu2017/amd_rate_a
     occ400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS Configuration
 Workload Profile set to General Throughput Compute
 Determinism Control set to Manual
  Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Four memory domains per socket
 Thermal Configuration set to Maximum Cooling
 ACPI CST C2 Latency set to 18 microseconds
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0x0A10110e for the
AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this
ROM is version GenoaPI 1.0.0.1-L6
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on admin1 Tue Jun 28 19:19:19 2022

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux admin1 5.15.0-53-generic #59-Ubuntu SMP Mon Oct 17 18:53:30 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    19:19:19 up 1 day, 50 min,  5 users,  load average: 0.08, 0.15, 0.99
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   admin1   tty1     -                Mon18   24:47m  0.06s  0.00s -bash
   admin1   pts/0    172.16.0.100     Mon18   24:47m  0.23s  0.09s sshd: admin1 [priv]
   admin1   pts/1    172.16.0.100     Mon18   15.00s  3.01s  0.23s sudo -i
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  admin1   pts/2    172.16.0.100     Mon21   21:40m  0.02s  0.09s sshd: admin1 [priv]
  admin1   pts/3    172.16.0.100     Mon21   21:25m  0.02s  0.01s sudo -i

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       admin1

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              1546264
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: admin1 [priv]
 sshd: admin1@pts/0
 -bash
 sudo -i
 sudo -i
 -bash
 python3 ./run_intrate.py
 /bin/bash ./amd_rate_aocc400_genoa_B1.sh
 runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
   rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9174F 16-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     model           : 17
     stepping        : 1
     microcode       : 0xa10110e
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 3584 4K pages
     cpu cores       : 16
     siblings        : 32
     1 physical ids (chips)
     32 processors (hardware threads)
     physical id 0: core ids 0-15
     physical id 0: apicids 0-31
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   52 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          32
   On-line CPU(s) list:             0-31
   Vendor ID:                       AuthenticAMD
   Model name:                      AMD EPYC 9174F 16-Core Processor
   CPU family:                      25
   Model:                           17
   Thread(s) per core:              2
   Core(s) per socket:              16
   Socket(s):                       1
   Stepping:                        1
   Frequency boost:                 enabled
   CPU max MHz:                     4409.0000
   CPU min MHz:                     400.0000
   BogoMIPS:                        8187.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                  clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                    pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                  popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                    abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                     perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                   invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                   avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                   xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
                         lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                         pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                         avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
  Virtualization:                   AMD-V
  L1d cache:                        512 KiB (16 instances)
  L1i cache:                        512 KiB (16 instances)
  L2 cache:                         16 MiB (16 instances)
  L3 cache:                         256 MiB (8 instances)
  NUMA node(s):                     8
  NUMA node0 CPU(s):                0,1,16,17
  NUMA node1 CPU(s):                8,9,24,25
  NUMA node2 CPU(s):                4,5,20,21
  NUMA node3 CPU(s):                12,13,28,29
  NUMA node4 CPU(s):                6,7,22,23
  NUMA node5 CPU(s):                14,15,30,31
  NUMA node6 CPU(s):                2,3,18,19
  NUMA node7 CPU(s):                10,11,26,27
  Vulnerability Itlb multihit:      Not affected
  Vulnerability L1tf:               Not affected
  Vulnerability Mds:                Not affected
  Vulnerability Meltdown:           Not affected
  Vulnerability Mmio stale data:    Not affected
  Vulnerability Retbleed:           Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling, PBRSB-eIBRS Not affected
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K     512K    8 Data            1    64        1             64
     L1i       32K     512K    8 Instruction     1    64        1             64
     L2         1M      16M    8 Unified         2  2048        1             64
     L3        32M     256M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-1,16-17
  node 0 size: 48072 MB
  node 0 free: 47856 MB
  node 1 cpus: 8-9,24-25
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   node 1 size: 48382 MB
   node 1 free: 48179 MB
   node 2 cpus: 4-5,20-21
   node 2 size: 48382 MB
   node 2 free: 47992 MB
   node 3 cpus: 12-13,28-29
   node 3 size: 48382 MB
   node 3 free: 48221 MB
   node 4 cpus: 6-7,22-23
   node 4 size: 48382 MB
   node 4 free: 48209 MB
   node 5 cpus: 14-15,30-31
   node 5 size: 48382 MB
   node 5 free: 48099 MB
   node 6 cpus: 2-3,18-19
   node 6 size: 48382 MB
   node 6 free: 48161 MB
   node 7 cpus: 10-11,26-27
   node 7 size: 48307 MB
   node 7 free: 48109 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  11  12  12  12  12  12  12
     1:  11  10  12  12  12  12  12  12
     2:  12  12  10  11  12  12  12  12
     3:  12  12  11  10  12  12  12  12
     4:  12  12  12  12  10  11  12  12
     5:  12  12  12  12  11  10  12  12
     6:  12  12  12  12  12  12  10  11
     7:  12  12  12  12  12  12  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       395957324 kB

------------------------------------------------------------
10. who -r
  run-level 5 Jun 27 18:30

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  * fwupd-refresh.service              loaded failed failed Refresh fwupd metadata and update motd
  * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled            ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
                   lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
                  secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                  systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                      ufw vgauth
  enabled-runtime   netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled          console-getty debug-shell iscsid nftables rsync serial-getty@
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                      systemd-time-wait-sync upower
  generated         apport
  indirect          uuidd
  masked          cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                      x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-5.15.0-53-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 400 MHz and 4.41 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  4100MHz

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.1 LTS

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017
  Filesystem                     Type  Size  Used Avail Use% Mounted on
  /dev/mapper/ubuntu--vg-ubuntu--lv ext4   98G   37G   57G  40% /
```

**(Continued on next page)**

## Platform Notes (Continued)

```
 ------------------------------------------------------------
 22. /sys/devices/virtual/dmi/id
     Vendor:          HPE
     Product:         ProLiant DL345 Gen11
     Product Family:  ProLiant
     Serial:          DL345G11-002

 ------------------------------------------------------------
 23. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      5x Hynix HMCG88AEBRA168N 32 GB 2 rank 4800
      4x Hynix HMCG88MEBRA113N 32 GB 2 rank 4800
      3x Hynix HMCG88MEBRA115N 32 GB 2 rank 4800


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.12
    BIOS Date:         11/24/2022
    BIOS Revision:     1.12
    Firmware Revision: 1.10
```

## Compiler Version Notes

```
==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
        | 525.x264_r(base, peak) 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
        | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang

**(Continued on next page)**

## Base Optimization Flags (Continued)

C++ benchmarks (continued):
-lamdalloc-ext

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

## Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

## Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64

**(Continued on next page)**

## Peak Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext

**(Continued on next page)**

## Peak Optimization Flags (Continued)

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100 -finline-aggressive -mllvm -loop-unswitch-threshold=200000 -mllvm -reduce-array-computations=3 -zopt -fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lamdalloc-ext`

541.leela_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang -lamdalloc-ext`

Fortran benchmarks:
`-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost -floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm -lflang -lamdalloc`

## Peak Other Flags

C benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

502.gcc_r: `-L/usr/lib32 -Wno-unused-command-line-argument -L/home/work/cpu2017/v118/aocc4/b1/rate/amd_rate_aocc400_genoa_B_lib/lib32`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.2.html
http://www.spec.org/cpu2017/flags/aocc400-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.2.xml
http://www.spec.org/cpu2017/flags/aocc400-flags.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-06-28 15:19:19-0400.
Report generated on 2023-03-15 10:17:44 by CPU2017 PS formatter v6442.
Originally published on 2023-03-14.