SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz,Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

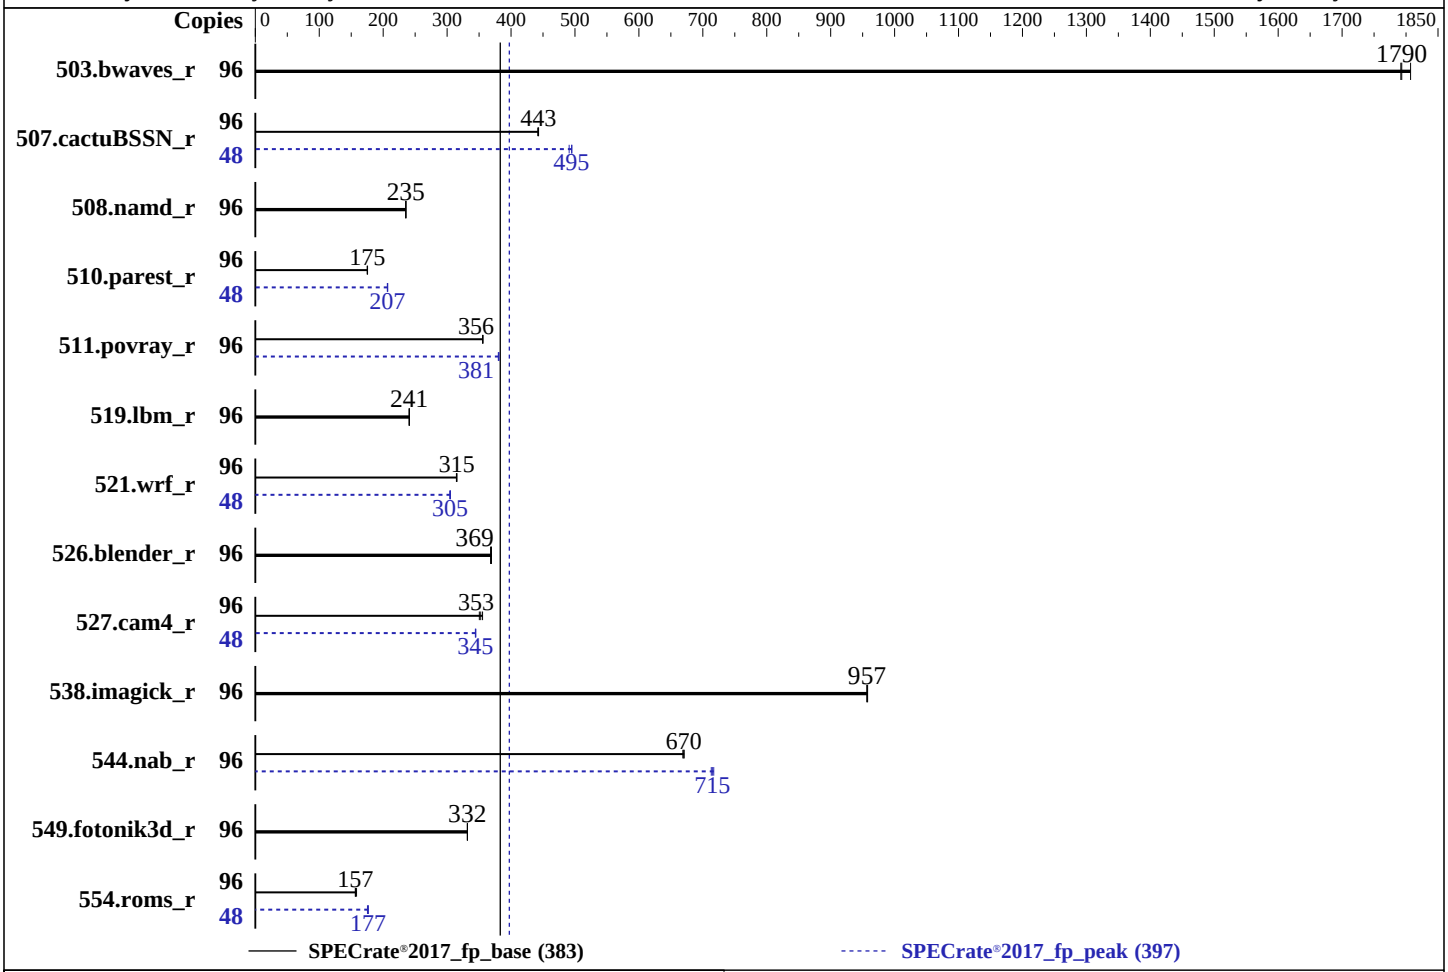

Hardware

CPU Name:	Intel Xeon Gold 6336Y
Max MHz:	3600
Nominal:	2400
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	36 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 512 GB NVMe SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.5 (Ootpa) 4.18.0-348.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version PEGC0042 released Jan-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero TDI100C3R-212
(2.40 GHz,Intel Xeon Gold 6336Y)

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	533	1810	537	1790	**537**	**1790**	96	533	1810	537	1790	**537**	**1790**
507.cactuBSSN_r	96	**274**	**443**	274	443	275	442	48	124	491	**123**	**495**	123	495
508.namd_r	96	**387**	**235**	387	236	388	235	96	**387**	**235**	387	236	388	235
510.parest_r	96	1431	176	1435	175	**1433**	**175**	48	608	206	**607**	**207**	606	207
511.povray_r	96	630	356	**630**	**356**	631	355	96	590	380	**589**	**381**	588	381
519.lbm_r	96	420	241	**420**	**241**	420	241	96	420	241	**420**	**241**	420	241
521.wrf_r	96	682	315	**683**	**315**	684	315	48	354	304	**353**	**305**	352	305
526.blender_r	96	396	369	**396**	**369**	397	368	96	396	369	**396**	**369**	397	368
527.cam4_r	96	**476**	**353**	472	355	479	350	48	243	345	244	344	**244**	**345**
538.imagick_r	96	249	958	250	957	**250**	**957**	96	249	958	250	957	**250**	**957**
544.nab_r	96	241	671	**241**	**670**	242	669	96	227	713	**226**	**715**	225	717
549.fotonik3d_r	96	1127	332	1128	332	**1128**	**332**	96	1127	332	1128	332	**1128**	**332**
554.roms_r	96	963	158	**974**	**157**	975	156	48	435	175	432	177	**432**	**177**

SPECrate®2017_fp_base = 383

SPECrate®2017_fp_peak = 397

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 1>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
SNC (Sub NUMA) = Enable
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
Hyper-Threading = Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on Tyronespec Mon Mar  6 21:36:24 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 239 (239-51.el8)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
```

(Continued on next page)

Platform Notes (Continued)

```
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
 22. Disk information
 23. /sys/devices/virtual/dmi/id
 24. dmidecode
 25. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux Tyronespec 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   21:36:24 up  7:48,  1 user,  load average: 51.67, 84.03, 90.42
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                13:49    7:44m  1.24s  0.02s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4126654
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4126654
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 18
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 -c
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=48 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=96 --configfile
   ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=48 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
    --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 106
    stepping        : 6
    microcode       : 0xd0002e0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 24
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-23
    physical id 1: core ids 0-23
    physical id 0: apicids 0-47
    physical id 1: apicids 64-111
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.32.1:
  Architecture:        x86_64
  CPU op-mode(s):      32-bit, 64-bit
  Byte Order:          Little Endian
  CPU(s):              96
  On-line CPU(s) list: 0-95
  Thread(s) per core:  2
```

(Continued on next page)

Platform Notes (Continued)

```
  Core(s) per socket:  24
  Socket(s):           2
  NUMA node(s):        2
  Vendor ID:           GenuineIntel
  BIOS Vendor ID:      Intel(R) Corporation
  CPU family:          6
  Model:               106
  Model name:          Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
  BIOS Model name:     Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
  Stepping:            6
  CPU MHz:             2400.000
  CPU max MHz:         3600.0000
  CPU min MHz:         800.0000
  BogoMIPS:            4800.00
  Virtualization:      VT-x
  L1d cache:           48K
  L1i cache:           32K
  L2 cache:            1280K
  L3 cache:            36864K
  NUMA node0 CPU(s):   0-23,48-71
  NUMA node1 CPU(s):   24-47,72-95
  Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                       acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                       arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
                      pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                      sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                      abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
                      stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
                      sgx bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                      xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                      wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
                      umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                      avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-23,48-71
  node 0 size: 515676 MB
  node 0 free: 493529 MB
  node 1 cpus: 24-47,72-95
  node 1 size: 516045 MB
  node 1 free: 495203 MB
  node distances:
  node   0   1
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  20
     1:  20  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056483628 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 6 13:50

------------------------------------------------------------
11. Systemd service manager version: systemd 239 (239-51.el8)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                          LOAD   ACTIVE SUB    DESCRIPTION
  * systemd-udev-settle.service loaded failed failed udev Wait for Complete Device Initialization

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE      UNIT FILES
  enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
             atd auditd autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm
             getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned
             libstoragemgmt libvirtd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
             nis-domainname nvidia-hibernate nvidia-resume nvidia-suspend nvmefc-boot-connections
             ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark
             sep5 smartd sshd sssd syslog timedatex tuned udisks2 vdo vgauthd vmtoolsd
  disabled   arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
             canberra-system-shutdown-reboot chrony-wait console-getty cpupower cups-browsed debug-shell
             dnsmasq ebtables gssproxy httpd httpd@ initial-setup initial-setup-reconfiguration iprdump
             iprinit iprupdate iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update
             ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server nftables numad nvidia-powerd
             nvmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct radvd ras-mc-ctl
             rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ snmpd snmptrapd speech-dispatcherd
             sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcsd tog-pegasus upower
             virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtqemud virtsecretd
             virtstoraged wpa_supplicant
  generated  SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
             gcc-toolset-11-stap-server gcc-toolset-11-systemtap gcc-toolset-9-stap-server
             gcc-toolset-9-systemtap scripts startup
  indirect   spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd
             virtlogd
  masked     systemd-timedated
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd1,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.60 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness         0
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 8.5 (Ootpa)
  redhat-release Red Hat Enterprise Linux release 8.5 (Ootpa)
  system-release Red Hat Enterprise Linux release 8.5 (Ootpa)

------------------------------------------------------------
21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
  itlb_multihit        Not affected
  l1tf                 Not affected
  mds                  Not affected
  meltdown             Not affected
  spec_store_bypass    Mitigation: Speculative Store Bypass disabled via prctl and seccomp
  spectre_v1           Mitigation: usercopy/swapgs barriers and __user pointer sanitization
  spectre_v2           Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
  srbds                Not affected
  tsx_async_abort      Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
     https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

------------------------------------------------------------
22. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   402G  210G  192G  53% /home

------------------------------------------------------------
23. /sys/devices/virtual/dmi/id
    Vendor:         TyroneSystems
```

(Continued on next page)

Platform Notes (Continued)

```
     Product:        TDI100C3R-212
     Product Family: Family
     Serial:         2X20382301

 ------------------------------------------------------------
 24. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200


 ------------------------------------------------------------
 25. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      PEGC0042
    BIOS Date:         01/16/2023
    BIOS Revision:     5.22
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -qopt-zmm-usage=high -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

(Continued on next page)

Peak Optimization Flags (Continued)

511.povray_r: `-w -m64 -std=c11 -Wl,-z,muldefs`
`-fprofile-generate`(pass 1)
`-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX512`
`-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops`
`-qopt-mem-layout-trans=4 -ljemalloc`
`-L/usr/local/jemalloc64-5.0.1/lib`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math`
`-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4`
`-nostandard-realloc-lhs -align array32byte -auto -ljemalloc`
`-L/usr/local/jemalloc64-5.0.1/lib`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-06 16:36:23-0500.
Report generated on 2023-03-29 00:34:47 by CPU2017 PS formatter v6442.
Originally published on 2023-03-28.