SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212
(2.40 GHz,Intel Xeon Gold 6336Y)

SPECspeed®2017_fp_base = 212

SPECspeed®2017_fp_peak = 212

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Mar-2023
Hardware Availability: Apr-2021
Software Availability: May-2022

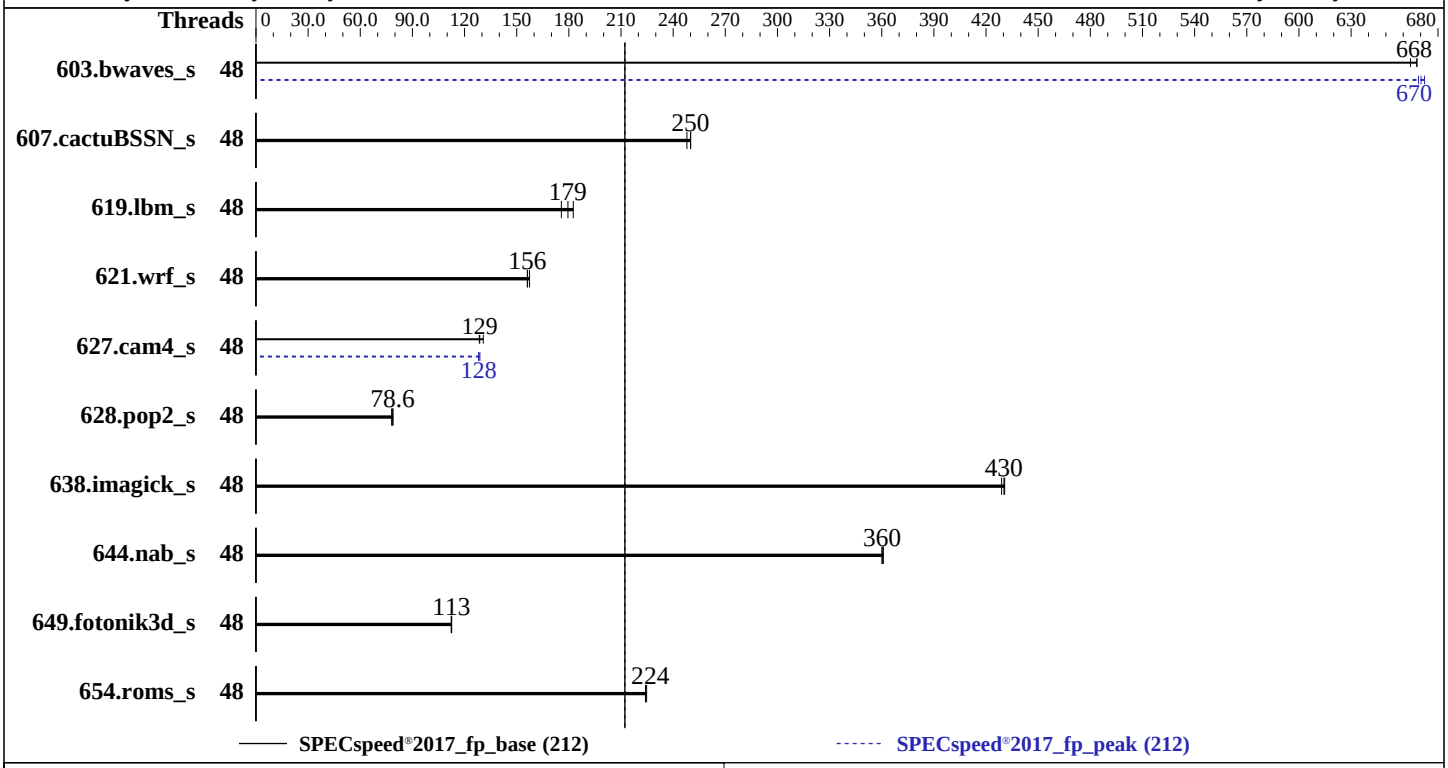

Hardware

CPU Name:	Intel Xeon Gold 6336Y
Max MHz:	3600
Nominal:	2400
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	36 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 512 GB NVMe SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.5 (Ootpa) 4.18.0-348.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version PEGC0042 released Jan-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	88.8	664	88.3	668	**88.3**	**668**	48	**88.0**	**670**	87.8	672	88.2	669
607.cactuBSSN_s	48	66.7	250	67.2	248	**66.7**	**250**	48	66.7	250	67.2	248	**66.7**	**250**
619.lbm_s	48	28.7	183	**29.2**	**179**	29.8	176	48	28.7	183	**29.2**	**179**	29.8	176
621.wrf_s	48	84.0	157	**84.6**	**156**	84.7	156	48	84.0	157	**84.6**	**156**	84.7	156
627.cam4_s	48	**68.8**	**129**	69.0	128	67.8	131	48	69.2	128	68.8	129	**69.1**	**128**
628.pop2_s	48	151	78.9	152	78.0	**151**	**78.6**	48	151	78.9	152	78.0	**151**	**78.6**
638.imagick_s	48	33.5	431	33.6	429	**33.5**	**430**	48	33.5	431	33.6	429	**33.5**	**430**
644.nab_s	48	**48.5**	**360**	48.5	360	48.4	361	48	**48.5**	**360**	48.5	360	48.4	361
649.fotonik3d_s	48	**81.0**	**113**	81.2	112	81.0	113	48	**81.0**	**113**	81.2	112	81.0	113
654.roms_s	48	70.3	224	70.1	225	**70.2**	**224**	48	70.3	224	70.1	225	**70.2**	**224**

SPECspeed®2017_fp_base = 212

SPECspeed®2017_fp_peak = 212

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 1>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
 numactl --interleave=all runcpu <etc>
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the
system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the
system as tested and documented.
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the
system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Extreme Performance
SNC (Sub NUMA) = Enable
KTI Prefetch = Enable
LLC Dead Line Alloc = Disable
Hyper-Threading = Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on Tyronespec Thu Mar  9 09:00:27 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 239 (239-51.el8)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
 22. Disk information
 23. /sys/devices/virtual/dmi/id
 24. dmidecode
 25. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux Tyronespec 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   09:00:27 up 2 days, 19:12,  1 user,  load average: 5.70, 6.72, 4.02
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                Mon13    3:42m  1.21s  0.00s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4126654
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4126654
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
```

(Continued on next page)

Platform Notes (Continued)

```
 /usr/lib/systemd/systemd --switched-root --system --deserialize 18
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=48 --tune base,peak -o all --define smt-on
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=48 --tune base,peak --output_format all
  --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
  --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 106
    stepping        : 6
    microcode       : 0xd0002e0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 24
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-23
    physical id 1: core ids 0-23
    physical id 0: apicids 0-47
    physical id 1: apicids 64-111
 Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.32.1:
  Architecture:        x86_64
  CPU op-mode(s):      32-bit, 64-bit
  Byte Order:          Little Endian
  CPU(s):              96
  On-line CPU(s) list: 0-95
  Thread(s) per core:  2
  Core(s) per socket:  24
  Socket(s):           2
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node(s):          2
   Vendor ID:             GenuineIntel
   BIOS Vendor ID:        Intel(R) Corporation
   CPU family:            6
   Model:                 106
   Model name:            Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
   BIOS Model name:       Intel(R) Xeon(R) Gold 6336Y CPU @ 2.40GHz
   Stepping:              6
   CPU MHz:               2400.000
   CPU max MHz:           3600.0000
   CPU min MHz:           800.0000
   BogoMIPS:              4800.00
   Virtualization:        VT-x
   L1d cache:             48K
   L1i cache:             32K
   L2 cache:              1280K
   L3 cache:              36864K
   NUMA node0 CPU(s):     0-23,48-71
   NUMA node1 CPU(s):     24-47,72-95
  Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                          acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                          arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                         sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                         abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
                         stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
                         sgx bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                         avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                         wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
                         umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                         avx512_vpopcntdq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-23,48-71
  node 0 size: 515676 MB
  node 0 free: 481985 MB
  node 1 cpus: 24-47,72-95
  node 1 size: 516045 MB
  node 1 free: 485098 MB
  node distances:
  node   0   1
    0:  10  20
    1:  20  10
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056483628 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 6 13:50

------------------------------------------------------------
11. Systemd service manager version: systemd 239 (239-51.el8)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                          LOAD   ACTIVE SUB    DESCRIPTION
  * systemd-udev-settle.service loaded failed failed udev Wait for Complete Device Initialization

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE      UNIT FILES
  enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
             atd auditd autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm
             getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned
             libstoragemgmt libvirtd loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
             nis-domainname nvidia-hibernate nvidia-resume nvidia-suspend nvmefc-boot-connections
             ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark
             sep5 smartd sshd sssd syslog timedatex tuned udisks2 vdo vgauthd vmtoolsd
  disabled   arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
             canberra-system-shutdown-reboot chrony-wait console-getty cpupower cups-browsed debug-shell
             dnsmasq ebtables gssproxy httpd httpd@ initial-setup initial-setup-reconfiguration iprdump
             iprinit iprupdate iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update
             ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server nftables numad nvidia-powerd
             nvmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct radvd ras-mc-ctl
             rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ snmpd snmptrapd speech-dispatcherd
             sshd-keygen@ switcheroo-control systemd-nspawn@ systemd-resolved tcsd tog-pegasus upower
             virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtqemud virtsecretd
             virtstoraged wpa_supplicant
  generated  SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
             gcc-toolset-11-stap-server gcc-toolset-11-systemtap gcc-toolset-9-stap-server
             gcc-toolset-9-systemtap scripts startup
  indirect   spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd
             virtlogd
  masked     systemd-timedated

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 14. Linux kernel boot-time arguments, from /proc/cmdline
   BOOT_IMAGE=(hd1,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
   root=/dev/mapper/rhel-root
   ro
   resume=/dev/mapper/rhel-swap
   rd.lvm.lv=rhel/root
   rd.lvm.lv=rhel/swap
   rhgb
   quiet

 ------------------------------------------------------------
 15. cpupower frequency-info
   analyzing CPU 0:
     current policy: frequency should be within 800 MHz and 3.60 GHz.
                     The governor "performance" may decide which speed to use
                     within this range.
     boost state support:
       Supported: yes
       Active: yes

 ------------------------------------------------------------
 16. tuned-adm active
   Current active profile: throughput-performance

 ------------------------------------------------------------
 17. sysctl
   kernel.numa_balancing               1
   kernel.randomize_va_space           2
   vm.compaction_proactiveness         0
   vm.dirty_background_bytes           0
   vm.dirty_background_ratio          10
   vm.dirty_bytes                      0
   vm.dirty_expire_centisecs        3000
   vm.dirty_ratio                     40
   vm.dirty_writeback_centisecs      500
   vm.dirtytime_expire_seconds     43200
   vm.extfrag_threshold              500
   vm.min_unmapped_ratio               1
   vm.nr_hugepages                     0
   vm.nr_hugepages_mempolicy           0
   vm.nr_overcommit_hugepages          0
   vm.swappiness                      10
   vm.watermark_boost_factor       15000
   vm.watermark_scale_factor          10
   vm.zone_reclaim_mode                0

 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 8.5 (Ootpa)
  redhat-release Red Hat Enterprise Linux release 8.5 (Ootpa)
  system-release Red Hat Enterprise Linux release 8.5 (Ootpa)

------------------------------------------------------------
21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
  itlb_multihit        Not affected
  l1tf                 Not affected
  mds                  Not affected
  meltdown             Not affected
  spec_store_bypass    Mitigation: Speculative Store Bypass disabled via prctl and seccomp
  spectre_v1           Mitigation: usercopy/swapgs barriers and __user pointer sanitization
  spectre_v2           Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
  srbds                Not affected
  tsx_async_abort      Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
     https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

------------------------------------------------------------
22. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   402G  210G  192G  53% /home

------------------------------------------------------------
23. /sys/devices/virtual/dmi/id
    Vendor:         TyroneSystems
    Product:        TDI100C3R-212
    Product Family: Family
```

(Continued on next page)

Platform Notes (Continued)

```
     Serial:         2X20382301

 ------------------------------------------------------------
 24. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
      16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200


 ------------------------------------------------------------
 25. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      PEGC0042
    BIOS Date:         01/16/2023
    BIOS Revision:     5.22
```

Compiler Version Notes

```
==============================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
                | 644.nab_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                 | 654.roms_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                 | 628.pop2_s(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl

(Continued on next page)

Base Portability Flags (Continued)

638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-09 04:00:26-0500.
Report generated on 2023-03-29 00:34:12 by CPU2017 PS formatter v6442.
Originally published on 2023-03-28.