SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen11
(2.70 GHz, Intel Xeon Platinum 8458P)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2022

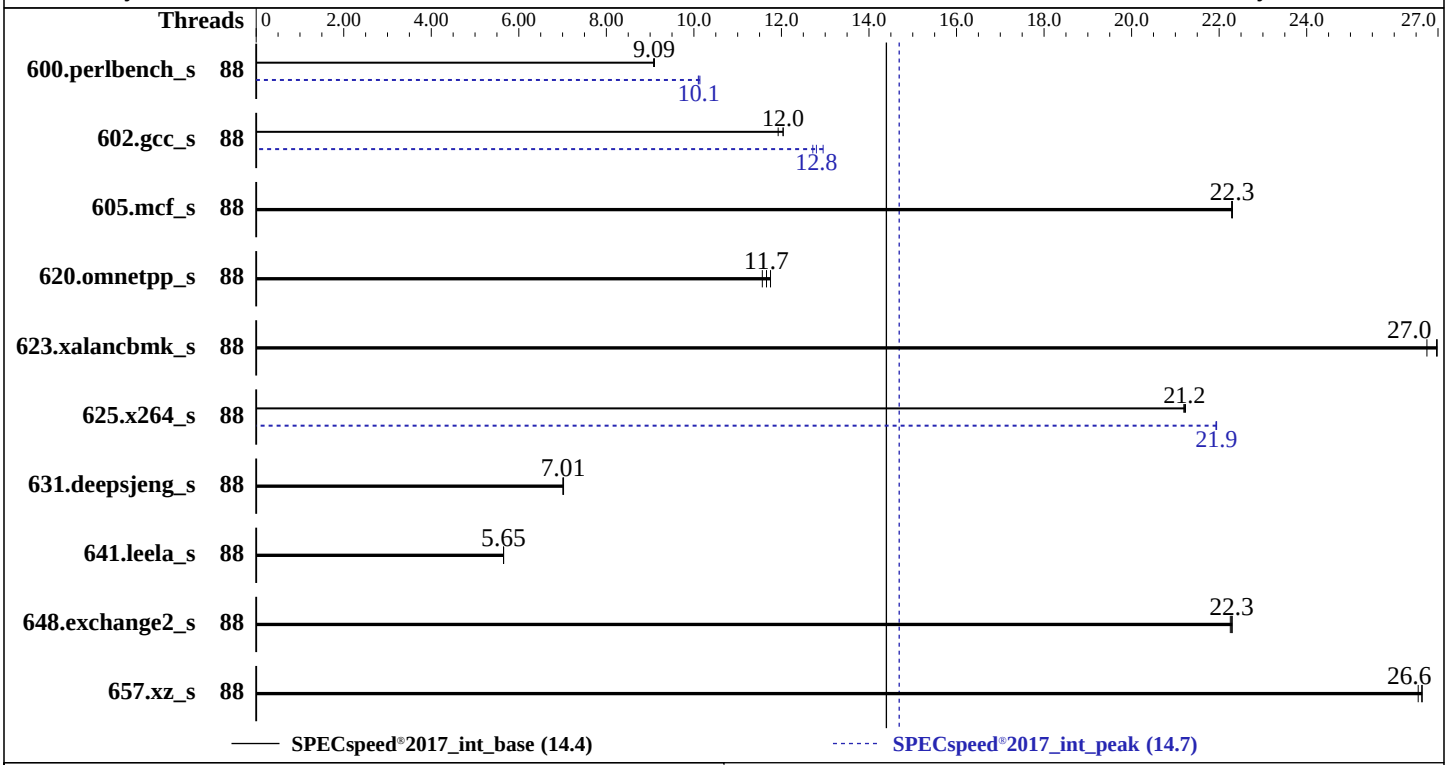

Hardware

CPU Name:	Intel Xeon Platinum 8458P
Max MHz:	3800
Nominal:	2700
Enabled:	88 cores, 2 chips
Orderable:	1, 2 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	82.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 400 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.5 Kernel 4.18.0-348.el8.x86_64
Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	HPE BIOS Version v1.22 01/18/2023 released Jan-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant ML350 Gen11
(2.70 GHz, Intel Xeon Platinum 8458P)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	88	195	9.10	**195**	**9.09**	195	9.08	88	**176**	**10.1**	176	10.1	175	10.1
602.gcc_s	88	334	11.9	**331**	**12.0**	331	12.0	88	313	12.7	307	13.0	**311**	**12.8**
605.mcf_s	88	**212**	**22.3**	212	22.3	212	22.3	88	**212**	**22.3**	212	22.3	212	22.3
620.omnetpp_s	88	139	11.8	**140**	**11.7**	141	11.6	88	139	11.8	**140**	**11.7**	141	11.6
623.xalancbmk_s	88	**52.5**	**27.0**	52.5	27.0	53.0	26.7	88	**52.5**	**27.0**	52.5	27.0	53.0	26.7
625.x264_s	88	83.2	21.2	83.1	21.2	**83.2**	**21.2**	88	80.5	21.9	80.4	21.9	**80.4**	**21.9**
631.deepsjeng_s	88	204	7.01	204	7.02	**204**	**7.01**	88	204	7.01	204	7.02	**204**	**7.01**
641.leela_s	88	302	5.65	**302**	**5.65**	302	5.65	88	302	5.65	**302**	**5.65**	302	5.65
648.exchange2_s	88	132	22.3	**132**	**22.3**	132	22.3	88	132	22.3	**132**	**22.3**	132	22.3
657.xz_s	88	232	26.6	**232**	**26.6**	233	26.5	88	232	26.6	**232**	**26.6**	233	26.5

SPECspeed®2017_int_base = **14.4**

SPECspeed®2017_int_peak = **14.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
perf-bias for all the CPUs is set using "cpupower set -b 0"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Redhat Enterprise Linux 8.0
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
The system ROM used for this result contains Intel microcode version 0x2b000161 for
the Intel Xeon Platinum 8458P processor.
BIOS Configuration:
 Workload Profile set to General Peak Frequency Compute
 Thermal Configuration set to Maximum Cooling
 Intel Hyper-Threading set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Last Level Cache (LLC) Prefetch set to Enabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Dead Block Predictor set to Enabled
 Sub-NUMA Clustering set to Enabled SNC2(2-clusters)
 Workload Profile set to Custom
  Adjacent Sector Prefetch set to Disabled
  Minimum Processor Idle Power Package C-State set to No Package State

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Fri Feb  3 02:36:01 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 239 (239-51.el8)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
```

(Continued on next page)

Platform Notes (Continued)

```
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   02:36:01 up 1 min,  0 users,  load average: 1.99, 1.25, 0.49
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4127230
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4127230
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 17
 /usr/sbin/sshd -D
   -oCiphers=aes256-gcm@openssh.com,chacha20-poly1305@openssh.com,aes256-ctr,aes256-cbc,aes128-gcm@openssh.co
   m,aes128-ctr,aes128-cbc
   -oMACs=hmac-sha2-256-etm@openssh.com,hmac-sha1-etm@openssh.com,umac-128-etm@openssh.com,hmac-sha2-512-etm@
   openssh.com,hmac-sha2-256,hmac-sha1,umac-128@openssh.com,hmac-sha2-512...
 sshd: root [priv]
 sshd: root@notty
 bash -c cd $SPEC/ && $SPEC/intspeed.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=88 --tune base,peak -o all --define
   intspeedaffinity --define drop_caches intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=88 --tune base,peak --output_format all
   --define intspeedaffinity --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed
   intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
   --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8458P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000161
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 44
    siblings        : 44
    2 physical ids (chips)
    88 processors (hardware threads)
    physical id 0: core ids 0-43
    physical id 1: core ids 0-43
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86
    physical id 1: apicids
    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
    80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.32.1:
  Architecture:        x86_64
  CPU op-mode(s):      32-bit, 64-bit
  Byte Order:          Little Endian
  CPU(s):              88
  On-line CPU(s) list: 0-87
  Thread(s) per core:  1
  Core(s) per socket:  44
  Socket(s):           2
  NUMA node(s):        4
  Vendor ID:           GenuineIntel
  BIOS Vendor ID:      Intel(R) Corporation
  CPU family:          6
  Model:               143
  Model name:          Intel(R) Xeon(R) Platinum 8458P
  BIOS Model name:     Intel(R) Xeon(R) Platinum 8458P
  Stepping:            6
  CPU MHz:             2700.000
  BogoMIPS:            5400.00
  Virtualization:      VT-x
  L1d cache:           48K
  L1i cache:           32K
  L2 cache:            2048K
  L3 cache:            84480K
  NUMA node0 CPU(s):   0-10,44-54
  NUMA node1 CPU(s):   11-21,55-65
  NUMA node2 CPU(s):   22-32,66-76
  NUMA node3 CPU(s):   33-43,77-87
  Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                       acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                       arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf
                       tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
```

(Continued on next page)

Platform Notes (Continued)

```
                    xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
                    f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                    flexpriority ept vpid ept_ad fsgsbase tsc_adjust sgx bmi1 hle avx2 smep bmi2 erms
                    invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt
                    avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                    cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                    arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
                    movdiri movdir64b enqcmd sgx_lc fsrm md_clear serialize tsxldtrk pconfig arch_lbr
                    avx512_fp16 flush_l1d arch_capabilities

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-10,44-54
  node 0 size: 257756 MB
  node 0 free: 257417 MB
  node 1 cpus: 11-21,55-65
  node 1 size: 258043 MB
  node 1 free: 257411 MB
  node 2 cpus: 22-32,66-76
  node 2 size: 258043 MB
  node 2 free: 257841 MB
  node 3 cpus: 33-43,77-87
  node 3 size: 258003 MB
  node 3 free: 257802 MB
  node distances:
  node   0   1   2   3
    0:  10  20  30  30
    1:  20  10  30  30
    2:  30  30  10  20
    3:  30  30  20  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056609696 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 3 02:35

------------------------------------------------------------
11. Systemd service manager version: systemd 239 (239-51.el8)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE     UNIT FILES
  enabled   NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd autovt@ chronyd crond
            firewalld getty@ import-state irqbalance kdump loadmodules lvm2-monitor mdmonitor microcode
            nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd syslog timedatex tuned
            udisks2
  disabled  blk-availability chrony-wait console-getty cpupower debug-shell ebtables iprdump iprinit
            iprupdate kvm_stat man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts serial-getty@
            sshd-keygen@ systemd-resolved tcsd
  indirect  sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
  masked    systemd-timedated
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness        0
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    40
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_swap              64
  pages_to_scan            4096
```

(Continued on next page)

Platform Notes (Continued)

```
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 8.5 (Ootpa)
  redhat-release Red Hat Enterprise Linux release 8.5 (Ootpa)
  system-release Red Hat Enterprise Linux release 8.5 (Ootpa)

------------------------------------------------------------
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
  itlb_multihit        Not affected
  l1tf                 Not affected
  mds                  Not affected
  meltdown             Not affected
  spec_store_bypass    Mitigation: Speculative Store Bypass disabled via prctl and seccomp
  spectre_v1           Mitigation: usercopy/swapgs barriers and __user pointer sanitization
  spectre_v2           Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
  srbds                Not affected
  tsx_async_abort      Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
     https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   372G   71G  302G  19% /home

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant ML350 Gen11
    Product Family: ProLiant
    Serial:         CNX20800P7

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      1.22
   BIOS Date:         01/18/2023
   BIOS Revision:     1.22
   Firmware Revision: 1.10
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
        | 657.xz_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Peak Optimization Flags (Continued)

600.perlbench_s (continued):
-ljemalloc

602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-03 02:36:00-0500.
Report generated on 2024-01-29 17:28:04 by CPU2017 PS formatter v6716.
Originally published on 2023-03-28.