



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H, 2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019


Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

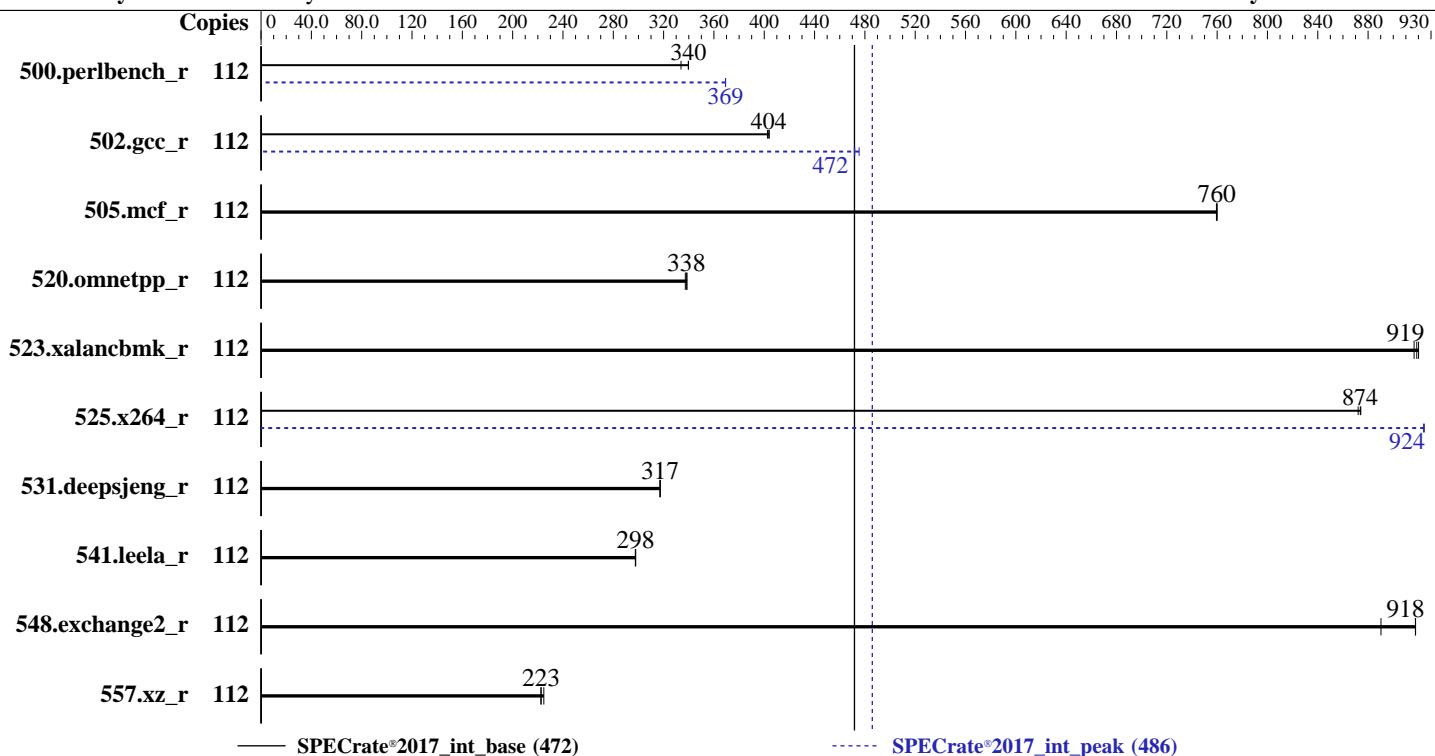

Hardware

CPU Name: Intel Xeon Platinum 8450H
 Max MHz: 3500
 Nominal: 2000
 Enabled: 56 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 75 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB M.2 SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Compiler: 5.14.21-150400.22-default
 C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 4.3.1a released Feb-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H, 2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	525	340	534	334	525	340	112	483	369	483	369	483	369	483	369
502.gcc_r	112	393	404	394	403	393	404	112	334	475	336	472	336	472	336	472
505.mcf_r	112	238	760	238	760	238	759	112	238	760	238	760	238	759	238	759
520.omnetpp_r	112	435	338	436	337	434	339	112	435	338	436	337	434	339	434	339
523.xalancbmk_r	112	129	920	129	919	129	917	112	129	920	129	919	129	917	129	917
525.x264_r	112	225	872	224	874	224	874	112	212	924	212	925	212	924	212	924
531.deepsjeng_r	112	405	317	405	317	405	317	112	405	317	405	317	405	317	405	317
541.leela_r	112	623	298	623	298	623	298	112	623	298	623	298	623	298	623	298
548.exchange2_r	112	330	890	320	918	320	918	112	330	890	320	918	320	918	320	918
557.xz_r	112	538	225	543	223	544	222	112	538	225	543	223	544	222	544	222

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H, 2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Sub NUMA Clustering set to Enable SNC4

LLC Dead Line set to Disabled

ADDDC Sparing set to Disabled

Processor C6 Report set to Enabled

UPI Link Enablement 3

UPI Power Management Enabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on srv04 Wed Mar 22 07:50:02 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H,
2.00GHz)

SPECCrate®2017_int_base = 472

SPECCrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

1. uname -a
Linux srv04 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
x86_64 x86_64 GNU/Linux

2. w
07:50:02 up 1 min, 1 user, load average: 0.18, 0.08, 0.03
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 07:49 9.00s 1.45s 0.22s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4126899
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4126899
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=56 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=112 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
cores=56 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
--output_format all --nopower --runmode rate --tune base:peak --size reframe intrate --nopreenv
--note-preenv --logfile \$SPEC/tmp/CPU2017.216/templogs/preenv.intrate.216.0.log --lognum 216.0
--from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/cpu2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8450H
vendor_id : GenuineIntel
cpu family : 6

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H,
2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
model      : 143
stepping   : 8
microcode  : 0x2b000161
bugs       : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores  : 28
siblings   : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-27
physical id 1: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:  0-111
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) Platinum 8450H
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):            2
Stepping:              8
CPU max MHz:          3500.0000
CPU min MHz:          800.0000
BogoMIPS:              4000.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
                      nonstop_tsc cpuid aperf/fmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                      lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                      invpcid_single intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced
                      tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil hle
                      avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                      cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                      arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      tme avx512_vpocndq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                      enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
                      amx_tile flush_lll arch_capabilities
Virtualization:        VT-x
L1d cache:             2.6 MiB (56 instances)
L1i cache:             1.8 MiB (56 instances)
L2 cache:              112 MiB (56 instances)
L3 cache:              150 MiB (2 instances)
NUMA node(s):          8
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H,
2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
NUMA node0 CPU(s):          0-6,56-62
NUMA node1 CPU(s):          7-13,63-69
NUMA node2 CPU(s):          14-20,70-76
NUMA node3 CPU(s):          21-27,77-83
NUMA node4 CPU(s):          28-34,84-90
NUMA node5 CPU(s):          35-41,91-97
NUMA node6 CPU(s):          42-48,98-104
NUMA node7 CPU(s):          49-55,105-111
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:          Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.6M	12	Data	1	64	1	64
L1i	32K	1.8M	8	Instruction	1	64	1	64
L2	2M	112M	16	Unified	2	2048	1	64
L3	75M	150M	15	Unified	3	81920	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-6,56-62
node 0 size: 128669 MB
node 0 free: 127598 MB
node 1 cpus: 7-13,63-69
node 1 size: 129020 MB
node 1 free: 128444 MB
node 2 cpus: 14-20,70-76
node 2 size: 129020 MB
node 2 free: 128525 MB
node 3 cpus: 21-27,77-83
node 3 size: 129020 MB
node 3 free: 128500 MB
node 4 cpus: 28-34,84-90
node 4 size: 129020 MB
node 4 free: 128514 MB
node 5 cpus: 35-41,91-97
node 5 size: 129020 MB
node 5 free: 128481 MB
node 6 cpus: 42-48,98-104
node 6 size: 129020 MB
node 6 free: 128513 MB
node 7 cpus: 49-55,105-111
node 7 size: 128957 MB
node 7 free: 128419 MB
node distances:
node  0   1   2   3   4   5   6   7
 0: 10  12  12  12  21  21  21  21
 1: 12  10  12  12  21  21  21  21
 2: 12  12  10  12  21  21  21  21
 3: 12  12  12  10  21  21  21  21
 4: 21  21  21  21  10  12  12  12
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H,
2.00GHz)

SPECRate®2017_int_base = 472

SPECRate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
5: 21 21 21 21 21 12 10 12 12  
6: 21 21 21 21 12 12 10 12  
7: 21 21 21 21 12 12 12 10
```

9. /proc/meminfo

```
MemTotal: 1056510840 kB
```

10. who -r

```
run-level 3 Mar 22 07:48
```

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status  
multi-user running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=e05292c4-0a31-46de-94f3-3ad8c6a360dd  
splash=silent  
mitigations=auto  
quiet  
security=
```

14. cpupower frequency-info

```
analyzing CPU 0:
```

```
current policy: frequency should be within 800 MHz and 3.50 GHz.
```

```
The governor "performance" may decide which speed to use  
within this range.
```

```
boost state support:
```

```
Supported: yes
```

```
Active: yes
```

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H, 2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sdb3        xfs   218G   12G  206G   6%  /

-----
20. /sys/devices/virtual/dmi/id
    Vendor:      Cisco Systems Inc
    Product:     UCSC-C240-M7SX
    Serial:      WZP263592NZ

-----
21. dmidecode
    Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        16x 0xAD00 HMCG94MEBRA109N 64 GB 2 rank 4800

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H, 2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Vendor: Cisco Systems, Inc.
BIOS Version: C240M7.4.3.1a.0.0201231701
BIOS Date: 02/01/2023
BIOS Revision: 5.29

Compiler Version Notes

```
=====
C | 502.gcc_r(peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C | 502.gcc_r(peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H, 2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H,
2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Platinum 8450H, 2.00GHz)

SPECrate®2017_int_base = 472

SPECrate®2017_int_peak = 486

CPU2017 License: 9019

Test Date: Mar-2023

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2023

Tested by: Cisco Systems

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-22 10:50:01-0400.

Report generated on 2024-01-29 17:31:35 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-11.