



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573


Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

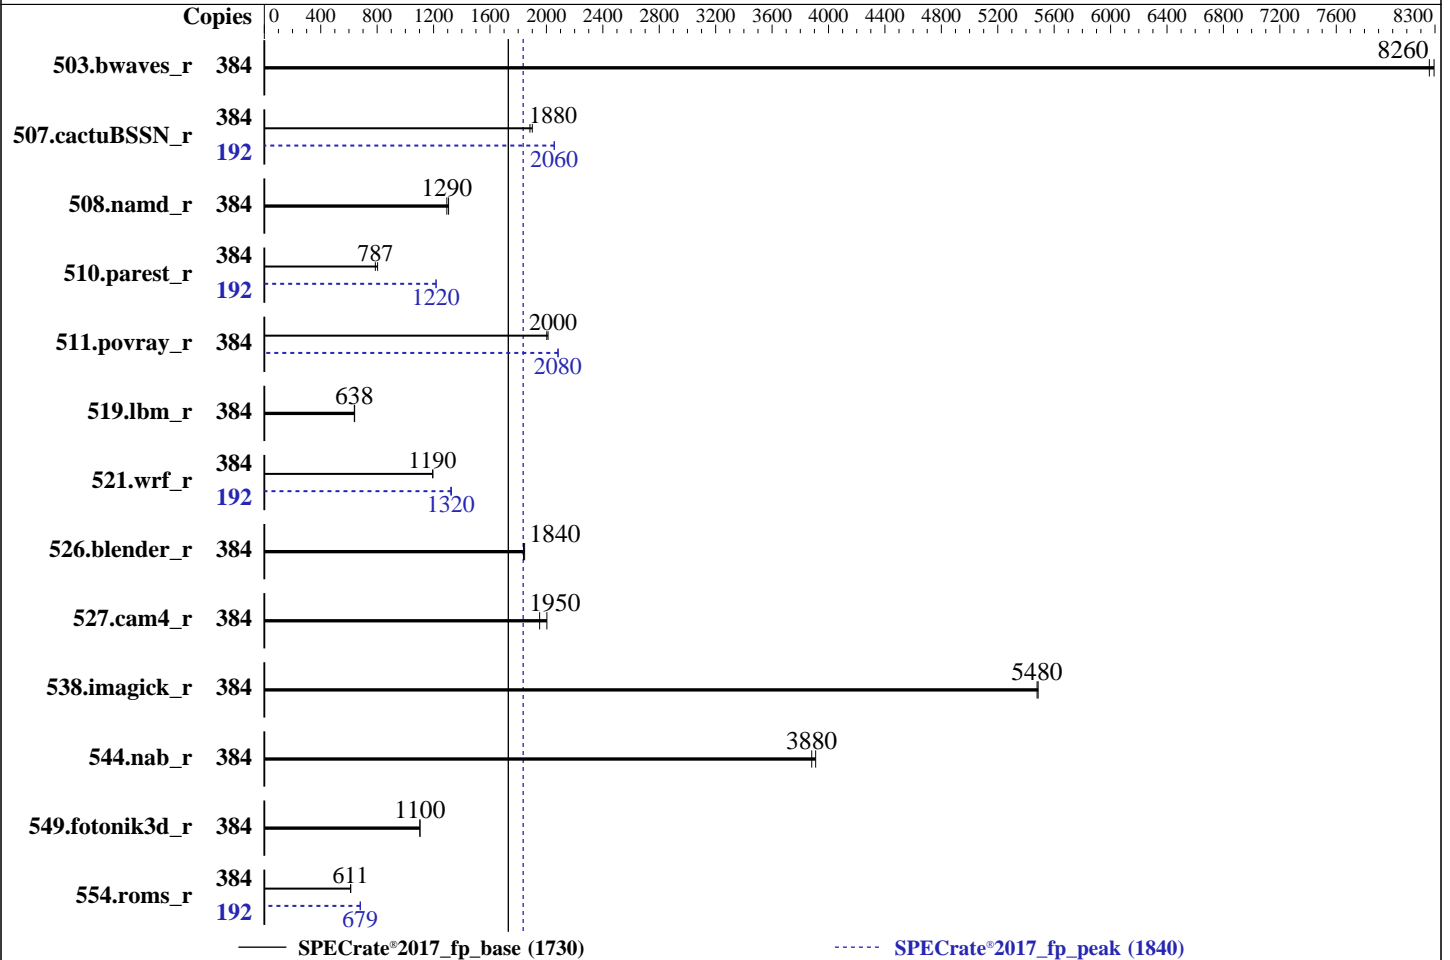

Hardware

CPU Name: Intel Xeon Platinum 8468H
 Max MHz: 3800
 Nominal: 2100
 Enabled: 192 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 190 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 1.4.0 released Mar-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	384	464	8290	466	8260			384	464	8290	466	8260		
507.cactuBSSN_r	384	258	1880	256	1900			192	118	2060	118	2060		
508.namd_r	384	282	1290	279	1310			384	282	1290	279	1310		
510.parest_r	384	1276	787	1251	803			192	412	1220	413	1220		
511.povray_r	384	448	2000	446	2010			384	431	2080	430	2080		
519.lbm_r	384	634	638	632	640			384	634	638	632	640		
521.wrf_r	384	720	1200	721	1190			192	324	1330	325	1320		
526.blender_r	384	318	1840	317	1850			384	318	1840	317	1850		
527.cam4_r	384	344	1950	335	2000			384	344	1950	335	2000		
538.imagick_r	384	174	5480	174	5490			384	174	5480	174	5490		
544.nab_r	384	167	3880	165	3910			384	167	3880	165	3910		
549.fotonik3d_r	384	1356	1100	1356	1100			384	1356	1100	1356	1100		
554.roms_r	384	996	613	998	611			192	448	681	449	679		

SPECrate®2017_fp_base = **1730**

SPECrate®2017_fp_peak = **1840**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/je5.0.1-64"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 190 GB ramdisk created with the cmd: "mount -t tmpfs -o size=190G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```

    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    DCU Streamer Prefetcher : Disabled
    Sub NUMA Cluster : 4-way Clustering
    LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled
    Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
    CIE : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
    Power Management : Disabled

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Mar 27 06:16:33 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

```

```

2. w
 06:16:33 up 4:36, 1 user, load average: 193.88, 332.78, 361.67
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root      :l          01:41   ?xdm?  1:01m  0.00s  /usr/libexec/gdm-x-session --register-session --run-script
gnome-session

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 8251943
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 8251943
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
/usr/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
--define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
csv,html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=384 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=192 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
csv,html,pdf,txt --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings       : 96
4 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 2: core ids 0-47
physical id 3: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
physical id 2: apicids 256-351
physical id 3: apicids 384-479
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 384
On-line CPU(s) list: 0-383
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel
Model name: Intel(R) Xeon(R) Platinum 8468H
BIOS Model name: Intel(R) Xeon(R) Platinum 8468H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 4
Stepping: 8
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtptr pdcn pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vmni flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vppopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities

Virtualization:

VT-x
L1d cache: 9 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 384 MiB (192 instances)
L3 cache: 420 MiB (4 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0, 8, 16, 24, 32, 40, 48, 56, 64, 72, 80, 88, 192, 200, 208, 216, 224, 232, 240, 248, 256, 264, 272, 280
NUMA node1 CPU(s): 96, 104, 112, 120, 128, 136, 144, 152, 160, 168, 176, 184, 288, 296, 304, 312, 320, 328, 336, 344, 352, 360, 368, 376
NUMA node2 CPU(s): 4, 12, 20, 28, 36, 44, 52, 60, 68, 76, 84, 92, 196, 204, 212, 220, 228, 236, 244, 252, 260, 268, 276, 284
NUMA node3 CPU(s): 100, 108, 116, 124, 132, 140, 148, 156, 164, 172, 180, 188, 292, 300, 308, 316, 324, 332, 340, 348, 356, 364, 372, 380
NUMA node4 CPU(s): 1, 9, 17, 25, 33, 41, 49, 57, 65, 73, 81, 89, 193, 201, 209, 217, 225, 233, 241, 249, 257, 265, 273, 281
NUMA node5 CPU(s): 97, 105, 113, 121, 129, 137, 145, 153, 161, 169, 177, 185, 289, 297, 305, 313, 321, 329, 337, 345, 353, 361, 369, 377
NUMA node6 CPU(s): 5, 13, 21, 29, 37, 45, 53, 61, 69, 77, 85, 93, 197, 205, 213, 221, 229, 237, 245, 253, 261, 269, 277, 285
NUMA node7 CPU(s): 101, 109, 117, 125, 133, 141, 149, 157, 165, 173, 181, 189, 293, 301, 309, 317, 325, 333, 341, 349, 357, 365, 373, 381
NUMA node8 CPU(s): 2, 10, 18, 26, 34, 42, 50, 58, 66, 74, 82, 90, 194, 202, 210, 218, 226, 234, 242, 250, 258, 266, 274, 282
NUMA node9 CPU(s): 98, 106, 114, 122, 130, 138, 146, 154, 162, 170, 178, 186, 290, 298, 306, 314, 322, 330, 338, 346, 354, 362, 370, 378
NUMA node10 CPU(s): 6, 14, 22, 30, 38, 46, 54, 62, 70, 78, 86, 94, 198, 206, 214, 222, 230, 238, 246, 254, 262, 270, 278, 286
NUMA node11 CPU(s): 102, 110, 118, 126, 134, 142, 150, 158, 166, 174, 182, 190, 294, 302, 310, 318, 326, 334, 342, 350, 358, 366, 374, 382
NUMA node12 CPU(s): 3, 11, 19, 27, 35, 43, 51, 59, 67, 75, 83, 91, 195, 203, 211, 219, 227, 235, 243, 251, 259, 267, 275, 283
NUMA node13 CPU(s): 99, 107, 115, 123, 131, 139, 147, 155, 163, 171, 179, 187, 291, 299, 307, 315, 323, 331, 339, 347, 355, 363, 371, 379
NUMA node14 CPU(s): 7, 15, 23, 31, 39, 47, 55, 63, 71, 79, 87, 95, 199, 207, 215, 223, 231, 239, 247, 255, 263, 271, 279, 287
NUMA node15 CPU(s): 103, 111, 119, 127, 135, 143, 151, 159, 167, 175, 183, 191, 295, 303, 311, 319, 327, 335, 343, 351, 359, 367, 375, 383
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	9M	12	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	2M	384M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0,8,16,24,32,40,48,56,64,72,80,88,192,200,208,216,224,232,240,248,256,264,272,280
node 0 size: 127831 MB
node 0 free: 117818 MB
node 1 cpus: 96,104,112,120,128,136,144,152,160,168,176,184,288,296,304,312,320,328,336,344,352,360,368,376
node 1 size: 129018 MB
node 1 free: 128015 MB
node 2 cpus: 4,12,20,28,36,44,52,60,68,76,84,92,196,204,212,220,228,236,244,252,260,268,276,284
node 2 size: 129018 MB
node 2 free: 128015 MB
node 3 cpus:
100,108,116,124,132,140,148,156,164,172,180,188,292,300,308,316,324,332,340,348,356,364,372,380
node 3 size: 129018 MB
node 3 free: 126788 MB
node 4 cpus: 1,9,17,25,33,41,49,57,65,73,81,89,193,201,209,217,225,233,241,249,257,265,273,281
node 4 size: 129018 MB
node 4 free: 128002 MB
node 5 cpus: 97,105,113,121,129,137,145,153,161,169,177,185,289,297,305,313,321,329,337,345,353,361,369,377
node 5 size: 129018 MB
node 5 free: 128019 MB
node 6 cpus: 5,13,21,29,37,45,53,61,69,77,85,93,197,205,213,221,229,237,245,253,261,269,277,285
node 6 size: 129018 MB
node 6 free: 128009 MB
node 7 cpus:
101,109,117,125,133,141,149,157,165,173,181,189,293,301,309,317,325,333,341,349,357,365,373,381
node 7 size: 129018 MB
node 7 free: 128028 MB
node 8 cpus: 2,10,18,26,34,42,50,58,66,74,82,90,194,202,210,218,226,234,242,250,258,266,274,282
node 8 size: 129018 MB
node 8 free: 127777 MB
node 9 cpus: 98,106,114,122,130,138,146,154,162,170,178,186,290,298,306,314,322,330,338,346,354,362,370,378
node 9 size: 129018 MB
node 9 free: 128023 MB
node 10 cpus: 6,14,22,30,38,46,54,62,70,78,86,94,198,206,214,222,230,238,246,254,262,270,278,286
node 10 size: 129018 MB
node 10 free: 127939 MB
node 11 cpus:
102,110,118,126,134,142,150,158,166,174,182,190,294,302,310,318,326,334,342,350,358,366,374,382
node 11 size: 129018 MB
node 11 free: 127953 MB
node 12 cpus: 3,11,19,27,35,43,51,59,67,75,83,91,195,203,211,219,227,235,243,251,259,267,275,283
node 12 size: 129018 MB
node 12 free: 128021 MB
node 13 cpus:
99,107,115,123,131,139,147,155,163,171,179,187,291,299,307,315,323,331,339,347,355,363,371,379
node 13 size: 129018 MB
node 13 free: 128007 MB
node 14 cpus: 7,15,23,31,39,47,55,63,71,79,87,95,199,207,215,223,231,239,247,255,263,271,279,287
node 14 size: 128982 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 14 free: 127964 MB
node 15 cpus:
103,111,119,127,135,143,151,159,167,175,183,191,295,303,311,319,327,335,343,351,359,367,375,383
node 15 size: 128989 MB
node 15 free: 127605 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
 1:  12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
 2:  12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
 3:  12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
 4:  21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
 5:  21 21 21 21 12 10 12 12 21 21 21 21 21 21 21 21
 6:  21 21 21 21 12 12 10 12 21 21 21 21 21 21 21 21
 7:  21 21 21 21 12 12 12 10 21 21 21 21 21 21 21 21
 8:  21 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21
 9:  21 21 21 21 21 21 21 21 12 10 12 12 21 21 21 21
10:  21 21 21 21 21 21 21 21 12 12 10 12 21 21 21 21
11:  21 21 21 21 21 21 21 21 12 12 12 10 21 21 21 21
12:  21 21 21 21 21 21 21 21 21 21 21 10 12 12 12 12
13:  21 21 21 21 21 21 21 21 21 21 21 12 10 12 12 12
14:  21 21 21 21 21 21 21 21 21 21 21 12 12 10 12 12
15:  21 21 21 21 21 21 21 21 21 21 21 12 12 12 10 10

```

```

-----
9. /proc/meminfo
   MemTotal:      2112560664 kB

```

```

-----
10. who -r
    run-level 5 Mar 27 01:41

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target  Status
    graphical      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
nvme-fc-boot-connections ostree-remount pcmd pmie pmlogger power-profiles-daemon
qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd
sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgaauthd
virtqemud vmtoolsd
enabled-runtime systemd-remount-fs
disabled arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewallld grafana-server gssproxy
httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuiop kpatch kvm_stat ledmon
libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
nfs-server nftables nmb numad nvme-fc-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysextr target
targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2022

Platform Notes (Continued)

```

indirect          virtproxyd virtsecretD virtstoraged vsftpd wpa_supplicant
                  pcsd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                  virtlockd virtlogd vsftpd@

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Platform Notes (Continued)

pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 190G 4.2G 186G 3% /mnt/ramdisk

20. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge R860
Product Family: PowerEdge
Serial: 1234567

21. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
32x 00AD00B300AD HMC94MEBRA123N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Dell Inc.
BIOS Version: 1.4.0
BIOS Date: 03/15/2023
BIOS Revision: 1.4

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1) -flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_fp_base = 1730

PowerEdge R860 (Intel Xeon Platinum 8468H)

SPECrate®2017_fp_peak = 1840

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-27 06:16:32-0400.

Report generated on 2023-09-13 18:56:14 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-23.