



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

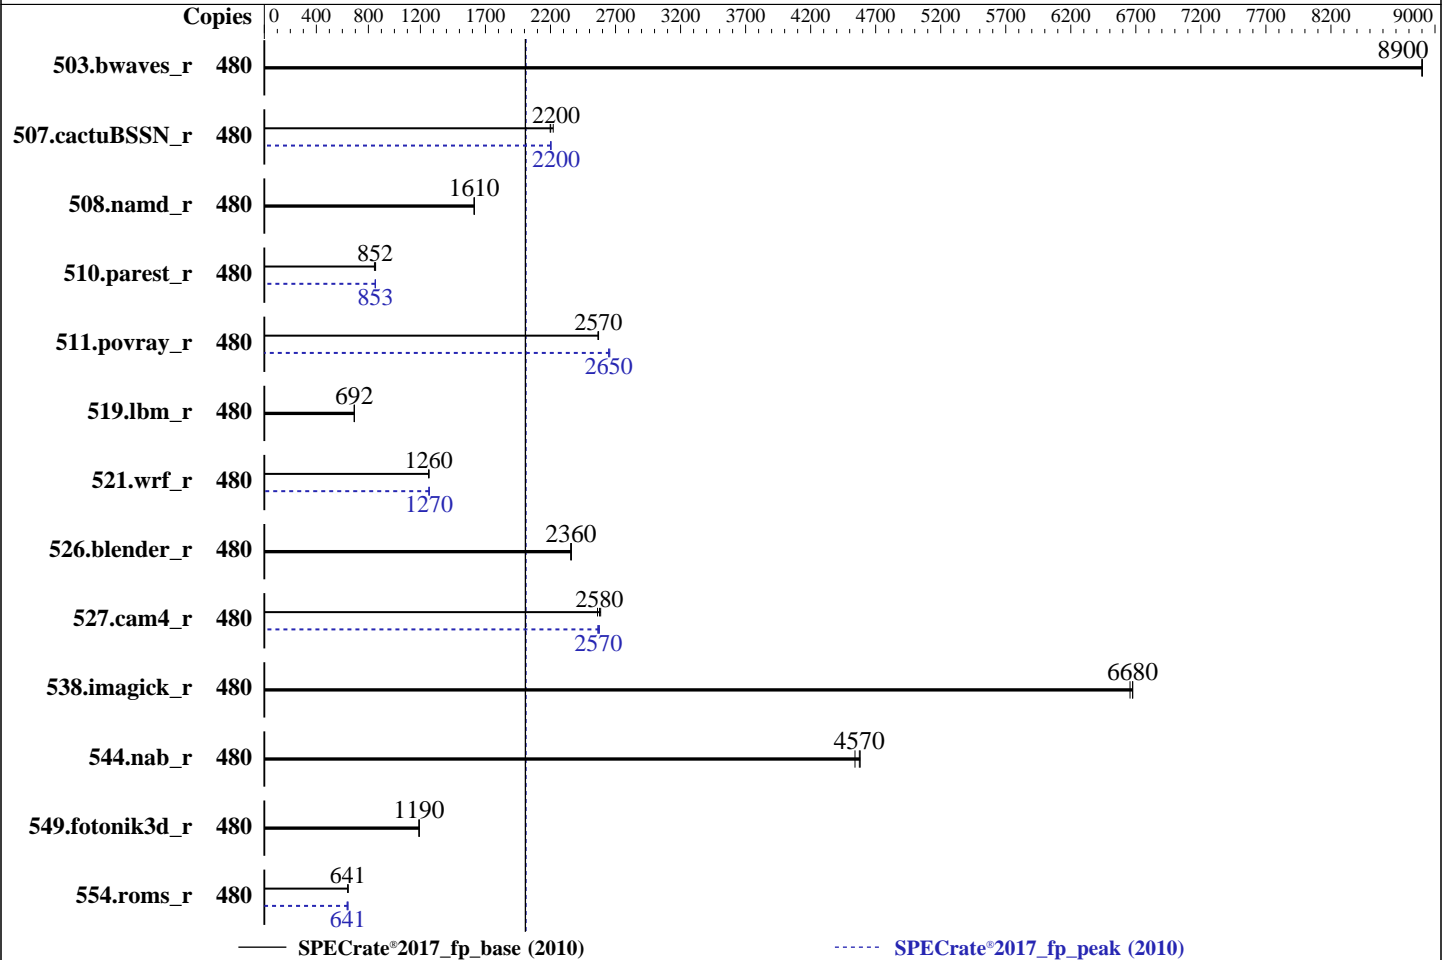

Hardware

CPU Name: Intel Xeon Platinum 8490H
 Max MHz: 3500
 Nominal: 1900
 Enabled: 240 cores, 4 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 112.5 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)
 5.14.0-70.13.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: Version 2.00.34 Released Apr-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	541	8900	541	8900	541	8900	480	541	8900	541	8900	541	8900
507.cactuBSSN_r	480	274	2220	276	2200	277	2200	480	276	2200	276	2200	276	2200
508.namd_r	480	283	1610	282	1610	283	1610	480	283	1610	282	1610	283	1610
510.parest_r	480	1483	847	1473	852	1468	855	480	1471	853	1472	853	1471	854
511.povray_r	480	437	2560	436	2570	436	2570	480	422	2660	423	2650	423	2650
519.lbm_r	480	731	692	731	692	731	692	480	731	692	731	692	731	692
521.wrf_r	480	850	1270	851	1260	850	1260	480	848	1270	849	1270	850	1270
526.blender_r	480	310	2360	310	2360	310	2360	480	310	2360	310	2360	310	2360
527.cam4_r	480	325	2590	326	2580	328	2560	480	327	2560	327	2570	326	2580
538.imagick_r	480	179	6680	179	6660	179	6680	480	179	6680	179	6660	179	6680
544.nab_r	480	176	4580	177	4570	178	4540	480	176	4580	177	4570	178	4540
549.fotonik3d_r	480	1571	1190	1572	1190	1572	1190	480	1571	1190	1572	1190	1572	1190
554.roms_r	480	1189	641	1182	645	1189	641	480	1190	641	1185	644	1199	636

SPECrate®2017_fp_base = **2010**

SPECrate®2017_fp_peak = **2010**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed May 31 02:45:30 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux

2. w
02:45:31 up 6:45, 1 user, load average: 207.88, 403.36, 447.54
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 20:05 5:47m 1.25s 0.08s -bash

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124876
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124876
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
/bin/sh ./run_rate.sh
runcpu --define default-platform-flags --copies 480 -c ic2023.0-lin-sapphirerapids-rate-20221201.cfg
--define smt-on --define cores=240 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 480 --configfile
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=240 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.008/templogs/preenv.fprate.008.0.log --lognum 008.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8490H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swaps
cpu cores      : 60
siblings       : 120
4 physical ids (chips)
480 processors (hardware threads)
physical id 0: core ids 0-59
physical id 1: core ids 0-59
physical id 2: core ids 0-59
physical id 3: core ids 0-59
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

physical id 0: apicids 0-119
physical id 1: apicids 128-247
physical id 2: apicids 256-375
physical id 3: apicids 384-503

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 480
On-line CPU(s) list:   0-479
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) Platinum 8490H
BIOS Model name:       Intel(R) Xeon(R) Platinum 8490H
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    60
Socket(s):              4
Stepping:               6
BogoMIPS:               3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                        invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                        xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities

```

```

Virtualization:        VT-x
L1d cache:             11.3 MiB (240 instances)
L1i cache:             7.5 MiB (240 instances)
L2 cache:              480 MiB (240 instances)
L3 cache:              450 MiB (4 instances)
NUMA node(s):         16
NUMA node0 CPU(s):    0-14,240-254
NUMA node1 CPU(s):    15-29,255-269
NUMA node2 CPU(s):    30-44,270-284
NUMA node3 CPU(s):    45-59,285-299
NUMA node4 CPU(s):    60-74,300-314
NUMA node5 CPU(s):    75-89,315-329
NUMA node6 CPU(s):    90-104,330-344
NUMA node7 CPU(s):    105-119,345-359
NUMA node8 CPU(s):    120-134,360-374

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

NUMA node9 CPU(s):          135-149,375-389
NUMA node10 CPU(s):         150-164,390-404
NUMA node11 CPU(s):         165-179,405-419
NUMA node12 CPU(s):         180-194,420-434
NUMA node13 CPU(s):         195-209,435-449
NUMA node14 CPU(s):         210-224,450-464
NUMA node15 CPU(s):         225-239,465-479
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:   Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	11.3M	12	Data	1	64	1	64
L1i	32K	7.5M	8	Instruction	1	64	1	64
L2	2M	480M	16	Unified	2	2048	1	64
L3	112.5M	450M	15	Unified	3	122880	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0-14,240-254
node 0 size: 63737 MB
node 0 free: 48166 MB
node 1 cpus: 15-29,255-269
node 1 size: 64469 MB
node 1 free: 52242 MB
node 2 cpus: 30-44,270-284
node 2 size: 64505 MB
node 2 free: 52397 MB
node 3 cpus: 45-59,285-299
node 3 size: 64505 MB
node 3 free: 52441 MB
node 4 cpus: 60-74,300-314
node 4 size: 64505 MB
node 4 free: 52434 MB
node 5 cpus: 75-89,315-329
node 5 size: 64505 MB
node 5 free: 52440 MB
node 6 cpus: 90-104,330-344
node 6 size: 64505 MB
node 6 free: 52427 MB
node 7 cpus: 105-119,345-359
node 7 size: 64505 MB
node 7 free: 52439 MB
node 8 cpus: 120-134,360-374
node 8 size: 64505 MB
node 8 free: 52431 MB
node 9 cpus: 135-149,375-389
node 9 size: 64505 MB
node 9 free: 52425 MB
node 10 cpus: 150-164,390-404
node 10 size: 64505 MB

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

node 10 free: 52430 MB
node 11 cpus: 165-179,405-419
node 11 size: 64505 MB
node 11 free: 52426 MB
node 12 cpus: 180-194,420-434
node 12 size: 64505 MB
node 12 free: 52389 MB
node 13 cpus: 195-209,435-449
node 13 size: 64505 MB
node 13 free: 52442 MB
node 14 cpus: 210-224,450-464
node 14 size: 64505 MB
node 14 free: 52241 MB
node 15 cpus: 225-239,465-479
node 15 size: 64476 MB
node 15 free: 52202 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 12 12 12 21 21 21 21 21 21 21 21 21 21 21 21
 1:  12 10 12 12 21 21 21 21 21 21 21 21 21 21 21 21
 2:  12 12 10 12 21 21 21 21 21 21 21 21 21 21 21 21
 3:  12 12 12 10 21 21 21 21 21 21 21 21 21 21 21 21
 4:  21 21 21 21 10 12 12 12 21 21 21 21 21 21 21 21
 5:  21 21 21 21 21 12 10 12 12 21 21 21 21 21 21 21
 6:  21 21 21 21 21 12 12 10 12 21 21 21 21 21 21 21
 7:  21 21 21 21 21 12 12 12 10 21 21 21 21 21 21 21
 8:  21 21 21 21 21 21 21 21 10 12 12 12 21 21 21 21
 9:  21 21 21 21 21 21 21 21 21 12 10 12 12 21 21 21
10:  21 21 21 21 21 21 21 21 21 12 12 10 12 21 21 21
11:  21 21 21 21 21 21 21 21 21 12 12 12 10 21 21 21
12:  21 21 21 21 21 21 21 21 21 21 21 21 10 12 12 12
13:  21 21 21 21 21 21 21 21 21 21 21 21 12 10 12 12
14:  21 21 21 21 21 21 21 21 21 21 21 21 12 12 10 12
15:  21 21 21 21 21 21 21 21 21 21 21 21 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1056006424 kB

```

```

-----
10. who -r
    run-level 3 May 30 20:00

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target Status
    multi-user      degraded

```

```

-----
12. Failed units, from systemctl list-units --state=failed
    UNIT          LOAD    ACTIVE SUB    DESCRIPTION
* sep5.service loaded failed failed systemd script to load sep5 driver at boot time

```

```

-----
13. Services, from systemctl list-unit-files
    STATE          UNIT FILES
enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                 dbus-broker firewalld getty@ irgbalance kdump mdmonitor microcode nis-domainname rhsmcertd
                 rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator udisks2
enabled-runtime  systemd-remount-fs

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```
disabled      chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update
              nftables rdisc rhsm rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@
              systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect      sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=058bfd1-c62b-4fad-8d41-5c40aa179007
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b47f1685-a5fa-4d39-b2d7-e3f6e95ad499
nohz_full=1-479
-----
```

```
-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
-----
```

```
-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never
hpage_pmd_size  2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs    10000
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

20. Disk information
SPEC is set to: /home/Uniautos/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda5 xfs 820G 565G 256G 69% /home

21. /sys/devices/virtual/dmi/id
Product: 5885H V7
Product Family: EagleStream

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Byosoft Corporation
BIOS Version: 2.00.34
BIOS Date: 04/18/2023

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using both C and C++:

```
icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Peak Optimization Flags (Continued)

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 2010

FusionServer 5885H V7 (Intel Xeon Platinum 8490H)

SPECrate®2017_fp_peak = 2010

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-30 14:45:30-0400.

Report generated on 2023-06-20 23:23:10 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.