SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620C-TN12R
(X12DDW-A6 , Intel Xeon Silver 4314)

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 249

CPU2017 License: 9019
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

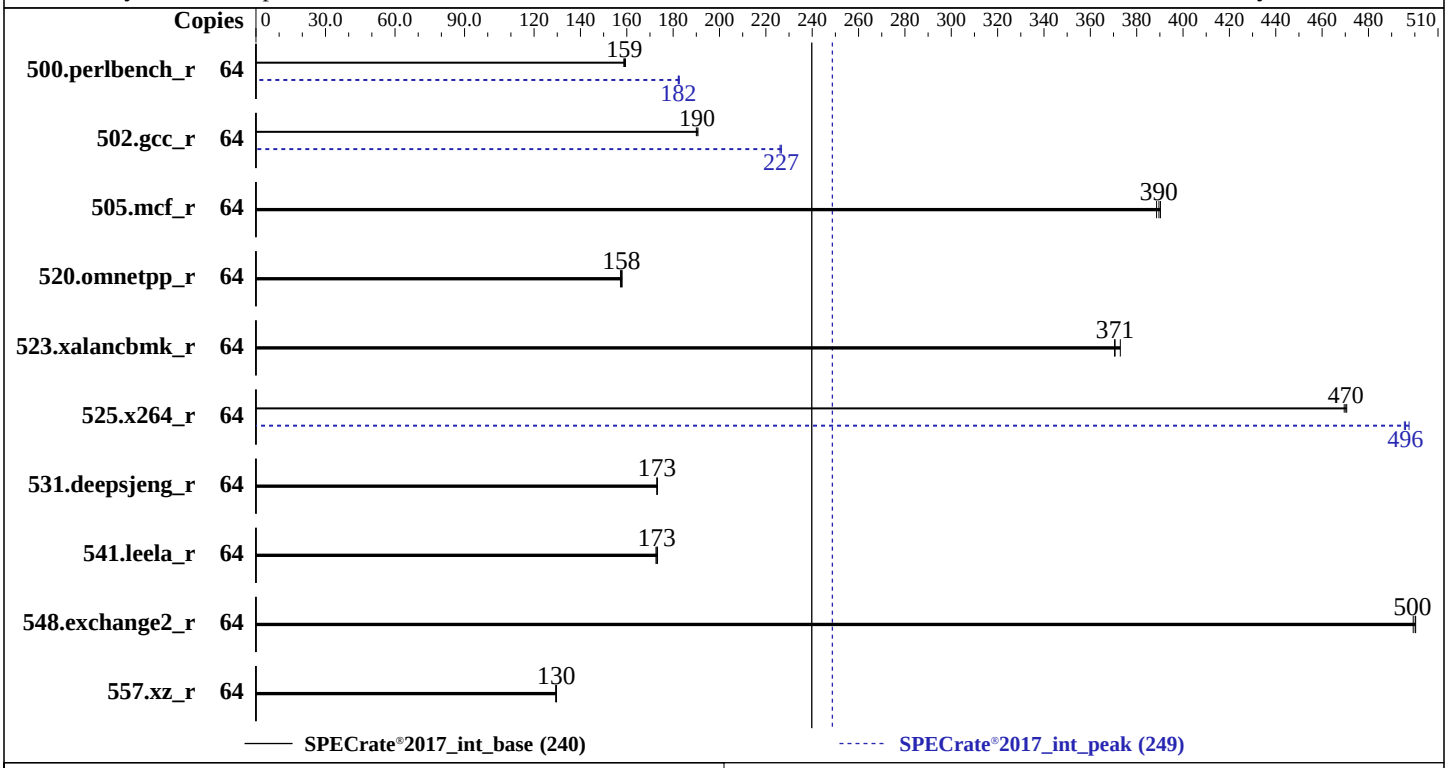

Hardware

CPU Name:	Intel Xeon Silver 4314
Max MHz:	3400
Nominal:	2400
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1.25 MB I+D on chip per core
L3:	24 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)
Storage:	1 x 2 TB SATA HDD, 7200RPM
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.5 released Mar-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620C-TN12R
(X12DDW-A6 , Intel Xeon Silver 4314)

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 249

CPU2017 License: 9019
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Jul-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	**641**	**159**	642	159	639	159	64	559	182	**559**	**182**	558	183
502.gcc_r	64	**476**	**190**	475	191	477	190	64	**400**	**227**	401	226	400	227
505.mcf_r	64	266	389	265	390	**265**	**390**	64	266	389	265	390	**265**	**390**
520.omnetpp_r	64	532	158	534	157	**532**	**158**	64	532	158	534	157	**532**	**158**
523.xalancbmk_r	64	**182**	**371**	181	373	182	370	64	**182**	**371**	181	373	182	370
525.x264_r	64	238	471	**238**	**470**	239	470	64	226	495	**226**	**496**	225	498
531.deepsjeng_r	64	**424**	**173**	424	173	423	173	64	**424**	**173**	424	173	423	173
541.leela_r	64	614	173	**613**	**173**	612	173	64	614	173	**613**	**173**	612	173
548.exchange2_r	64	336	499	335	500	**335**	**500**	64	336	499	335	500	**335**	**500**
557.xz_r	64	535	129	**533**	**130**	533	130	64	535	129	**533**	**130**	533	130

SPECrate®2017_int_base = 240

SPECrate®2017_int_peak = 249

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 Adjacent Cache prefetch = Disable
 LLC Dead Line Alloc = Disable
 DCU Streamer Prefetcher = Disable
 ADDDC Sparing = Disabled
 SNC (Sub NVMA) = Enable SNC2 (2-clusters)

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 105-55 Tue Jul 11 11:32:51 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux 105-55 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   11:32:51 up 2 min,  3 users,  load average: 0.80, 0.95, 0.42
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                11:31    9.00s  1.28s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4124971
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4124971
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
   ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
   ic2023.0-lin-core-avx512-rate-20221201.cfg --define smt-on --define cores=32 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.005/templogs/preenv.intrate.005.0.log --lognum 005.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Silver 4314 CPU @ 2.40GHz
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 106
    stepping        : 6
```

(Continued on next page)

Platform Notes (Continued)

```
     microcode       : 0xd000390
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 16
     siblings        : 32
     2 physical ids (chips)
     64 processors (hardware threads)
     physical id 0: core ids 0-15
     physical id 1: core ids 0-15
     physical id 0: apicids 0-31
     physical id 1: apicids 64-95
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          64
   On-line CPU(s) list:             0-63
   Vendor ID:                       GenuineIntel
   Model name:                      Intel(R) Xeon(R) Silver 4314 CPU @ 2.40GHz
   CPU family:                      6
   Model:                           106
   Thread(s) per core:              2
   Core(s) per socket:              16
   Socket(s):                       2
   Stepping:                        6
   CPU max MHz:                     3400.0000
   CPU min MHz:                     800.0000
   BogoMIPS:                        4800.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx
                                    est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe
                                    popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                    3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb
                                    stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
                                    tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                                    avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                                    sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                    cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
                                    dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
                                    vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm
                                    md_clear pconfig flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       1.5 MiB (32 instances)
   L1i cache:                       1 MiB (32 instances)
   L2 cache:                        40 MiB (32 instances)
   L3 cache:                        48 MiB (2 instances)
   NUMA node(s):                    4
   NUMA node0 CPU(s):               0-7,32-39
   NUMA node1 CPU(s):               8-15,40-47
   NUMA node2 CPU(s):               16-23,48-55
   NUMA node3 CPU(s):               24-31,56-63
   Vulnerability Itlb multihit:     Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     1.5M   12 Data            1    64        1             64
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2       1.3M      40M   20 Unified         2  1024        1             64
     L3        24M      48M   12 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-7,32-39
  node 0 size: 257519 MB
  node 0 free: 255103 MB
  node 1 cpus: 8-15,40-47
  node 1 size: 258009 MB
  node 1 free: 257507 MB
  node 2 cpus: 16-23,48-55
  node 2 size: 258043 MB
  node 2 free: 257680 MB
  node 3 cpus: 24-31,56-63
  node 3 size: 257693 MB
  node 3 free: 257262 MB
  node distances:
  node   0   1   2   3
    0:  10  11  20  20
    1:  11  10  20  20
    2:  20  20  10  11
    3:  20  20  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056017356 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 11 11:31 last=5

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager
                   firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early
                   klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
```

(Continued on next page)

Platform Notes (Continued)

```
  disabled         accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                   bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                   cups-browsed debug-shell ebtables exchange-bmc-os-info gpm grub2-once haveged-switch-root
                   ipmi ipmievd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind rpmconfigcheck
                   rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                   speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd udisks2 upower
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=ebf0634e-4c48-4c5b-86b6-a36f33a307a7
  splash=silent
  resume=/dev/disk/by-uuid/cf02ba25-9f51-46af-b067-8adca89c27bb
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=321M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.40 GHz.
                    The governor "powersave" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda3      xfs   815G  6.7G  808G   1% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         FruPM10
    Product:        FruPPM10
    Product Family: Family
    Serial:         FruPS10

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Micron Technology 36ASF8G72PZ-3G2F1 64 GB 2 rank 3200, configured at 2666


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      1.5
   BIOS Date:         03/23/2023
   BIOS Revision:     5.22
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.2023-05-23.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revC.2023-05-23.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-11 14:32:51-0400.
Report generated on 2024-01-29 17:58:59 by CPU2017 PS formatter v6716.
Originally published on 2023-08-01.