SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11
(2.20 GHz, AMD EPYC 9734)

SPECrate®2017_fp_base = 676

SPECrate®2017_fp_peak = 677

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jul-2023
Hardware Availability: Sep-2023
Software Availability: Apr-2023

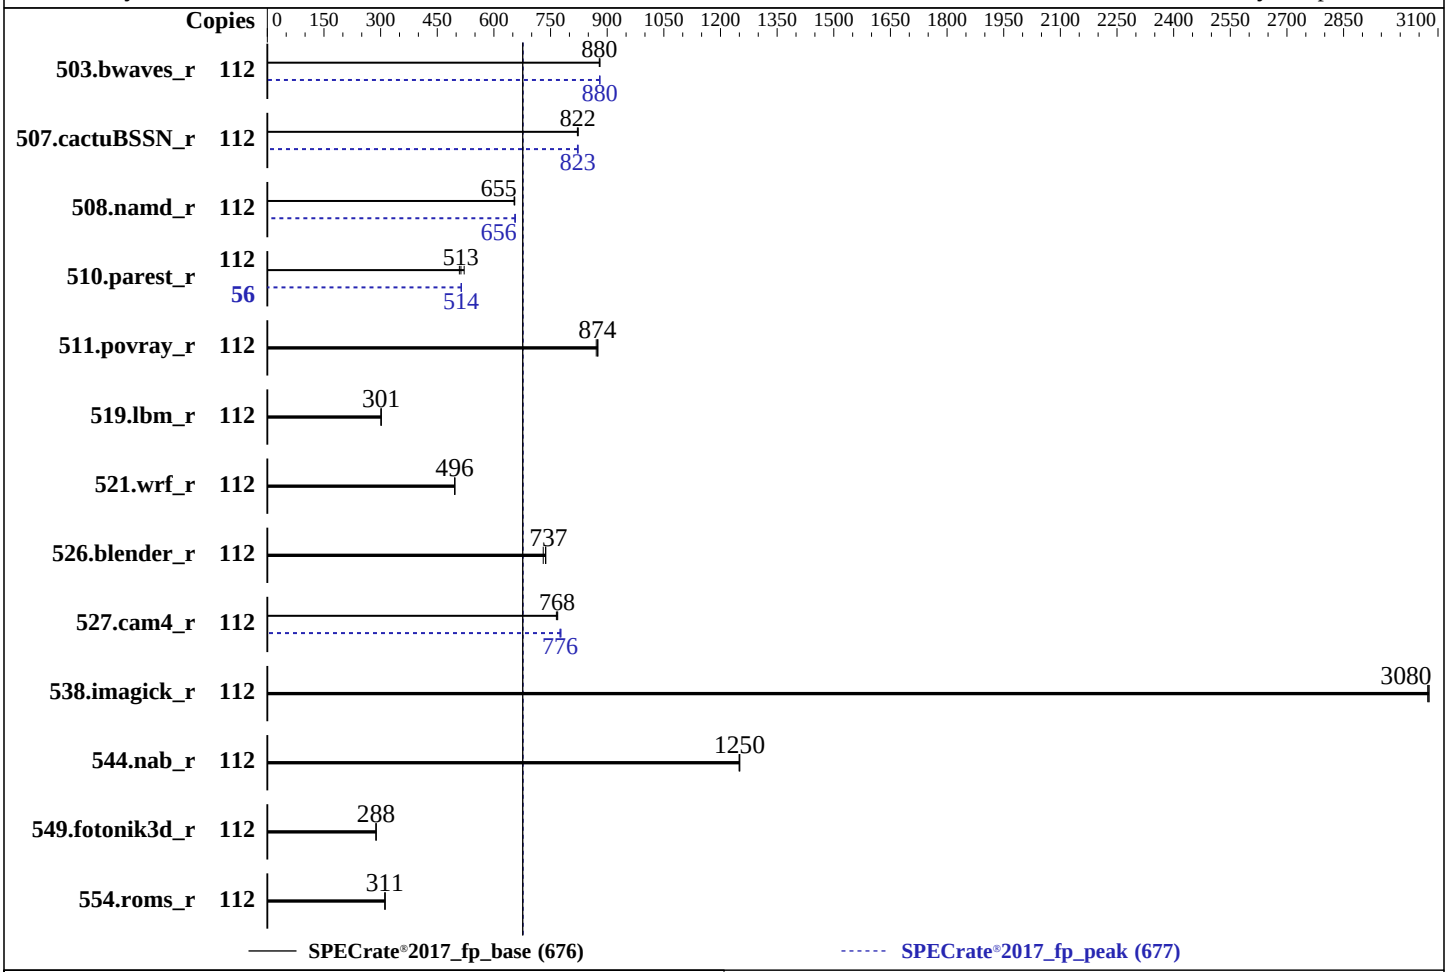

Hardware

CPU Name:	AMD EPYC 9734
Max MHz:	3000
Nominal:	2200
Enabled:	112 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 7 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) Kernel 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version v1.30 03/06/2023 released Mar-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	1275	881	**1277**	**880**	1278	879	112	1276	880	1275	881	**1276**	**880**
507.cactuBSSN_r	112	172	823	173	821	**172**	**822**	112	173	821	172	823	**172**	**823**
508.namd_r	112	163	653	**163**	**655**	162	655	112	**162**	**656**	162	655	162	657
510.parest_r	112	**571**	**513**	576	509	562	521	56	285	514	**285**	**514**	285	513
511.povray_r	112	300	871	299	876	**299**	**874**	112	300	871	299	876	**299**	**874**
519.lbm_r	112	**392**	**301**	392	301	392	301	112	**392**	**301**	392	301	392	301
521.wrf_r	112	505	497	**506**	**496**	506	496	112	505	497	**506**	**496**	506	496
526.blender_r	112	231	738	**232**	**737**	233	731	112	231	738	**232**	**737**	233	731
527.cam4_r	112	255	769	**255**	**768**	256	765	112	253	775	252	778	**253**	**776**
538.imagick_r	112	90.7	3070	90.5	3080	**90.6**	**3080**	112	90.7	3070	90.5	3080	**90.6**	**3080**
544.nab_r	112	**151**	**1250**	151	1250	151	1250	112	**151**	**1250**	151	1250	151	1250
549.fotonik3d_r	112	1515	288	1516	288	**1516**	**288**	112	1515	288	1516	288	**1516**	**288**
554.roms_r	112	**571**	**311**	572	311	570	312	112	**571**	**311**	572	311	570	312

SPECrate®2017_fp_base = 676

SPECrate®2017_fp_peak = 677

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/cpu2017new/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017new/amd_rate_aocc400_znver4_A_lib/lib
      32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 Workload Profile set to General Throughput Compute
  AMD SMT Option set to Disabled
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 NUMA memory domains per socket set to Four memory domains per socket
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 Data Fabric C-State Enable set to Force Enabled
 Workload Profile set to Custom
   Power Regulator set to OS Control Mode
   L2 HW Prefetcher set to Disabled

 Sysinfo program /home/cpu2017new/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Fri Jul  7 09:18:58 2023

 SUT (System Under Test) info as seen by some common utilities.

 ----------------------------------------------------------
 Table of contents
 ----------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
```

(Continued on next page)

Platform Notes (Continued)

```
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   09:18:58 up 5 min,  1 user,  load average: 0.08, 0.06, 0.02
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0     09:15   10.00s  1.20s  0.04s /bin/bash ./amd_rate_aocc400_znver4_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 3094709
  max locked memory           (kbytes, -l) 2097152
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 3094709
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
```

(Continued on next page)

Platform Notes (Continued)

```
 python3 ./run_fprate.py
 /bin/bash ./amd_rate_aocc400_znver4_A1.sh
 runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017new

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9734 112-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 2
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 112
    siblings        : 112
    1 physical ids (chips)
    112 processors (hardware threads)
    physical id 0: core ids
    0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94,96-102,104-110,112-118,120-126
    physical id 0: apicids
    0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94,96-102,104-110,112-118,120-126
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          112
  On-line CPU(s) list:             0-111
  Vendor ID:                       AuthenticAMD
  BIOS Vendor ID:                  Advanced Micro Devices, Inc.
  Model name:                      AMD EPYC 9734 112-Core Processor
  BIOS Model name:                 AMD EPYC 9734 112-Core Processor
  CPU family:                      25
  Model:                           160
  Thread(s) per core:              1
  Core(s) per socket:              112
  Socket(s):                       1
  Stepping:                        2
  Frequency boost:                 enabled
  CPU max MHz:                     2200.0000
  CPU min MHz:                     1500.0000
  BogoMIPS:                        4393.75
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                   popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                   abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                   perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
```

(Continued on next page)

Platform Notes (Continued)

```
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
  Virtualization:       AMD-V
  L1d cache:            3.5 MiB (112 instances)
  L1i cache:            3.5 MiB (112 instances)
  L2 cache:             112 MiB (112 instances)
  L3 cache:             256 MiB (16 instances)
  NUMA node(s):         16
  NUMA node0 CPU(s):    0-6
  NUMA node1 CPU(s):    7-13
  NUMA node2 CPU(s):    56-62
  NUMA node3 CPU(s):    63-69
  NUMA node4 CPU(s):    28-34
  NUMA node5 CPU(s):    35-41
  NUMA node6 CPU(s):    84-90
  NUMA node7 CPU(s):    91-97
  NUMA node8 CPU(s):    42-48
  NUMA node9 CPU(s):    49-55
  NUMA node10 CPU(s):   98-104
  NUMA node11 CPU(s):   105-111
  NUMA node12 CPU(s):   14-20
  NUMA node13 CPU(s):   21-27
  NUMA node14 CPU(s):   70-76
  NUMA node15 CPU(s):   77-83
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K     3.5M    8 Data            1    64        1             64
     L1i       32K     3.5M    8 Instruction     1    64        1             64
     L2         1M     112M    8 Unified         2  2048        1             64
     L3        16M     256M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-6
  node 0 size: 48136 MB
  node 0 free: 47964 MB
  node 1 cpus: 7-13
  node 1 size: 48382 MB
  node 1 free: 48228 MB
  node 2 cpus: 56-62
```

(Continued on next page)

Platform Notes (Continued)

```
  node 2 size: 48382 MB
  node 2 free: 48235 MB
  node 3 cpus: 63-69
  node 3 size: 48382 MB
  node 3 free: 48269 MB
  node 4 cpus: 28-34
  node 4 size: 48382 MB
  node 4 free: 48134 MB
  node 5 cpus: 35-41
  node 5 size: 48382 MB
  node 5 free: 48208 MB
  node 6 cpus: 84-90
  node 6 size: 48382 MB
  node 6 free: 48281 MB
  node 7 cpus: 91-97
  node 7 size: 48382 MB
  node 7 free: 48187 MB
  node 8 cpus: 42-48
  node 8 size: 48345 MB
  node 8 free: 48171 MB
  node 9 cpus: 49-55
  node 9 size: 48382 MB
  node 9 free: 48056 MB
  node 10 cpus: 98-104
  node 10 size: 48382 MB
  node 10 free: 48089 MB
  node 11 cpus: 105-111
  node 11 size: 48382 MB
  node 11 free: 47971 MB
  node 12 cpus: 14-20
  node 12 size: 48382 MB
  node 12 free: 48235 MB
  node 13 cpus: 21-27
  node 13 size: 48382 MB
  node 13 free: 48268 MB
  node 14 cpus: 70-76
  node 14 size: 48382 MB
  node 14 free: 48300 MB
  node 15 cpus: 77-83
  node 15 size: 48329 MB
  node 15 free: 48172 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12
    1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12
    2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12
    3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12
    4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12
    5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12
    6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12
    7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12
    8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12
    9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12
   10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12
   11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12
   12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11
   13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11
   14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11
   15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792352368 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jul 7 09:13

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond
                   dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                   nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                   systemd-network-generator udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower debug-shell
                   hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables rdisc rhsm
                   rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                   systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2200MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017new
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G  120G  699G  15% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL325 Gen11
    Product Family: ProLiant
    Serial:         DL325G11-010

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    10x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800
    2x Hynix HMCG94MEBRA121N 64 GB 2 rank 4800
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      1.30
    BIOS Date:         03/06/2023
    BIOS Revision:     1.30
    Firmware Revision: 1.40
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`
507.cactuBSSN_r: `-DSPEC_LP64`
508.namd_r: `-DSPEC_LP64`

(Continued on next page)

Base Portability Flags (Continued)

510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Benchmarks using both C and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc`

510.parest_r: `-m64 -flto -Wl,-mllvm -Wl,-suppress-fmas -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc`

Fortran benchmarks:

503.bwaves_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc -lflang`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `basepeak = yes`

Benchmarks using both Fortran and C:

521.wrf_r: `basepeak = yes`

527.cam4_r: `-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000 -fremap-arrays -mllvm -reduce-array-computations=3 -zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang`

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using both C and C++:

511.povray_r: `basepeak = yes`

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:
`-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4`
`-fveclib=AMDLIBM -ffast-math -fstruct-layout=7`
`-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining`
`-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt`
`-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000`
`-finline-aggressive -faggressive-loop-transform -fvector-transform`
`-fscalar-transform -Mrecursive -fepilog-vectorization-of-inductions`
`-lamdlibm -lamdalloc -lflang`

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html`
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml`
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-06 23:48:58-0400.
Report generated on 2023-08-02 16:28:32 by CPU2017 PS formatter v6716.
Originally published on 2023-08-01.