



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358


Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

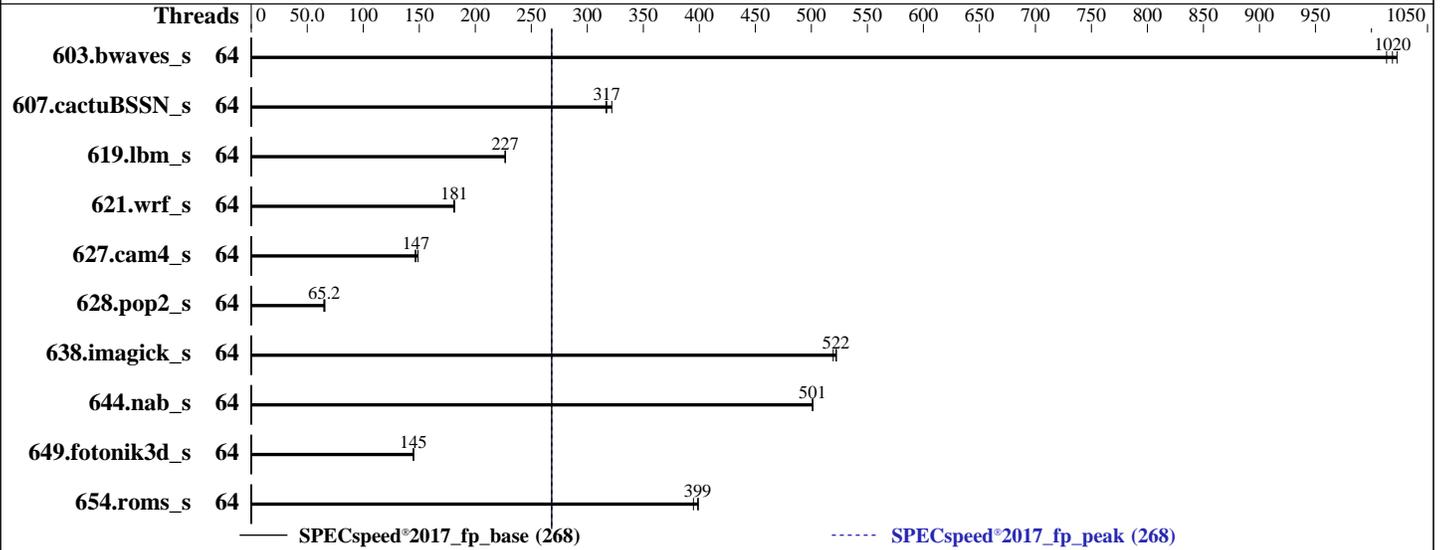

Hardware

CPU Name: Intel Xeon Gold 6430
 Max MHz: 3400
 Nominal: 2100
 Enabled: 64 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R, running at 4400)
 Storage: 1 x 1 TB NVME SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 5.14.0-70.22.1.el9_0.x86_64
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Version 03.01.00 released Dec-2022
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	58.2	1010	57.7	1020	<u>57.9</u>	<u>1020</u>	64	58.2	1010	57.7	1020	<u>57.9</u>	<u>1020</u>
607.cactuBSSN_s	64	<u>52.5</u>	<u>317</u>	52.7	317	51.8	322	64	<u>52.5</u>	<u>317</u>	52.7	317	51.8	322
619.lbm_s	64	23.1	227	23.1	227	<u>23.1</u>	<u>227</u>	64	23.1	227	23.1	227	<u>23.1</u>	<u>227</u>
621.wrf_s	64	73.1	181	<u>73.0</u>	<u>181</u>	72.9	181	64	73.1	181	<u>73.0</u>	<u>181</u>	72.9	181
627.cam4_s	64	59.5	149	60.6	146	<u>60.2</u>	<u>147</u>	64	59.5	149	60.6	146	<u>60.2</u>	<u>147</u>
628.pop2_s	64	181	65.8	183	64.8	<u>182</u>	<u>65.2</u>	64	181	65.8	183	64.8	<u>182</u>	<u>65.2</u>
638.imagick_s	64	27.8	519	<u>27.6</u>	<u>522</u>	27.6	522	64	27.8	519	<u>27.6</u>	<u>522</u>	27.6	522
644.nab_s	64	34.9	501	<u>34.9</u>	<u>501</u>	34.9	501	64	34.9	501	<u>34.9</u>	<u>501</u>	34.9	501
649.fotonik3d_s	64	<u>62.9</u>	<u>145</u>	62.9	145	63.0	145	64	<u>62.9</u>	<u>145</u>	62.9	145	63.0	145
654.roms_s	64	39.5	399	39.9	395	<u>39.5</u>	<u>399</u>	64	39.5	399	39.9	395	<u>39.5</u>	<u>399</u>

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 268

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to SNC2
Hyper Threading set to disable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Aug 3 13:31:49 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

```
1. uname -a
Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
13:31:49 up 4:36, 1 user, load average: 4.69, 5.72, 3.43
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 08:56 4:35m 1.12s 0.00s sh
reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358
Test Sponsor: Inspur Electronic Information Industry Co., Ltd.
Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023
Hardware Availability: Apr-2023
Software Availability: Dec-2022

Platform Notes (Continued)

```

real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062247
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062247
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
login -- root
-bash
sh reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=64 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.006/templogs/preenv.fpspeed.006.0.log --lognum 006.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6430
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000130
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Gold 6430
BIOS Model name:      Intel(R) Xeon(R) Gold 6430
CPU family:            6
Model:                 143
Thread(s) per core:   1
Core(s) per socket:   32
Socket(s):             2
Stepping:              6
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:              3800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                        avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                        wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0-31
NUMA node1 CPU(s):    32-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

	NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K		3M	12	Data	1	64	1	64
L1i	32K		2M	8	Instruction	1	64	1	64
L2	2M		128M	16	Unified	2	2048	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

L3 60M 120M 15 Unified 3 65536 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-31

node 0 size: 257608 MB

node 0 free: 249825 MB

node 1 cpus: 32-63

node 1 size: 257993 MB

node 1 free: 257626 MB

node distances:

node 0 1

0: 10 21

1: 21 10

9. /proc/meminfo

MemTotal: 527976368 kB

10. who -r

run-level 3 Aug 3 08:55

11. Systemd service manager version: systemd 250 (250-6.el9_0)

Default Target Status

multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT LOAD ACTIVE SUB DESCRIPTION

* dnf-makecache.service loaded failed failed dnf makecache

13. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled dbus-broker getty@ tuned udisks2 upower

enabled-runtime systemd-remount-fs

disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd

blk-availability canberra-system-bootup canberra-system-shutdown

canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond

debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update

mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild

rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd

systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext

indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64

root=/dev/mapper/rhel-root

ro

resume=/dev/mapper/rhel-swap

rd.lvm.lv=rhel/root

rd.lvm.lv=rhel/swap

15. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

```

analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes

```

```

-----
16. tuned-adm active
    Current active profile: hpc-compute

```

```

-----
17. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     2
vm.compaction_proactiveness   20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                10
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

```

```

-----
21. Disk information

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Platform Notes (Continued)

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	202G	617G	25%	/home

22. /sys/devices/virtual/dmi/id

```
Vendor:      IEI
Product:     NF5280M7
Product Family: Not specified
Serial:      000000000
```

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     03.01.00
BIOS Date:        12/29/2022
```

Compiler Version Notes

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.
NF5280M7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 268
SPECspeed®2017_fp_peak = 268

CPU2017 License: 3358

Test Sponsor: Inspur Electronic Information Industry Co., Ltd.

Tested by: Inspur Electronic Information Industry Co., Ltd.

Test Date: Aug-2023

Hardware Availability: Apr-2023

Software Availability: Dec-2022

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-03 13:31:48-0400.

Report generated on 2023-08-30 09:41:31 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.