SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Jun-2023
Hardware Availability: Aug-2023
Software Availability: Jun-2023

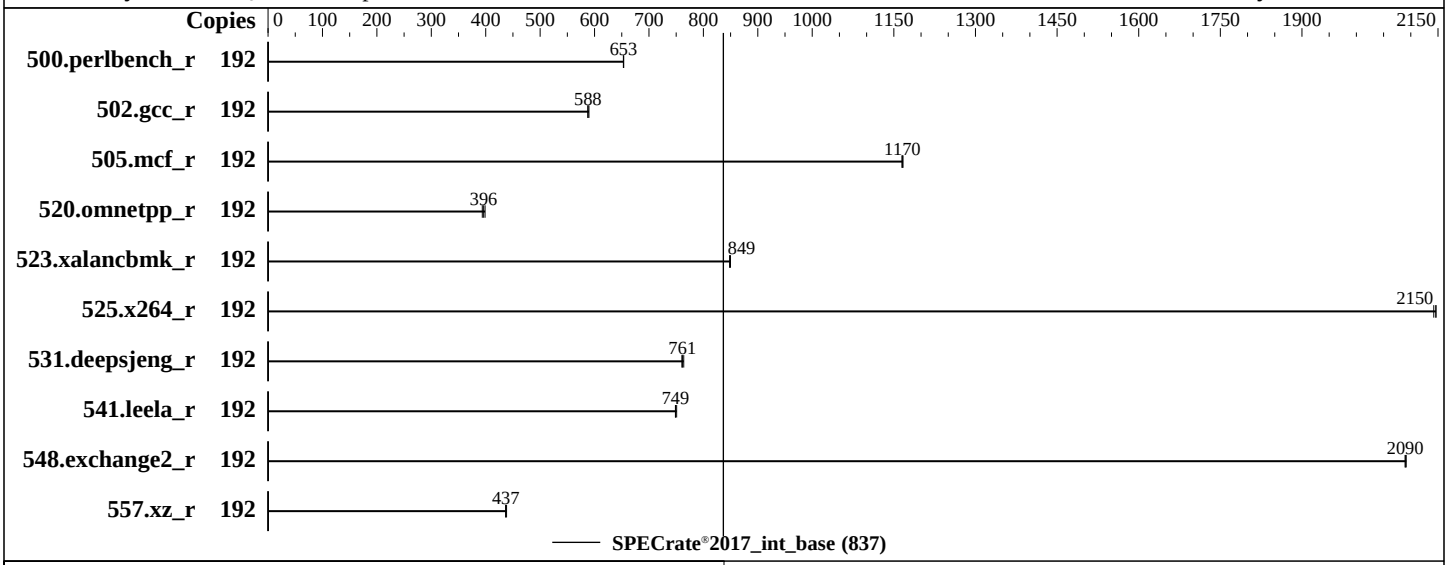

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	96 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB NVMe SSD
Other:	None

Software

OS:	Ubuntu 22.04.2 LTS kernel version 5.15.0-71-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	Version 3A04 released Jun-2023
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid S44NL-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Jun-2023
Hardware Availability: Aug-2023
Software Availability: Jun-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	468	654	468	653	**468**	**653**							
502.gcc_r	192	463	588	461	590	**462**	**588**							
505.mcf_r	192	266	1160	266	1170	**266**	**1170**							
520.omnetpp_r	192	**636**	**396**	632	399	640	394							
523.xalancbmk_r	192	239	850	239	848	**239**	**849**							
525.x264_r	192	**157**	**2150**	157	2150	157	2140							
531.deepsjeng_r	192	288	764	289	761	**289**	**761**							
541.leela_r	192	425	749	423	751	**425**	**749**							
548.exchange2_r	192	241	2090	241	2090	**241**	**2090**							
557.xz_r	192	473	438	475	437	**475**	**437**							

SPECrate®2017_int_base = 837

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/root/cpu2017-ZENVER4/amd_rate_aocc400_znver4_A_lib/lib:/root/cpu2017-ZENVER4/amd_rate_aocc400_znver4
     _A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 ACPI CST C2 Latency set to 18
 NUMA nodes per socket set to NPS4
 Determinism Control is Manual
 Determinism Slider set to Power
 cTDP Control set to Manual
 cTDP set to 400
 PPT Control set to Manual
 PPT set to 400
 ACPI SRAT L3 Cache As NUMA Domain set to Enable

 Sysinfo program /root/cpu2017-ZENVER4/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 192-168-118-113 Sat Jun 24 21:24:09 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. ulimit -a
  4. sysinfo process ancestry
  5. /proc/cpuinfo
  6. lscpu
  7. numactl --hardware
  8. /proc/meminfo
  9. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
 10. Services, from systemctl list-unit-files
 11. Linux kernel boot-time arguments, from /proc/cmdline
 12. cpupower frequency-info
 13. tuned-adm active
 14. sysctl
 15. /sys/kernel/mm/transparent_hugepage
 16. /sys/kernel/mm/transparent_hugepage/khugepaged
 17. OS release
 18. Disk information
```

(Continued on next page)

Platform Notes (Continued)

```
19. /sys/devices/virtual/dmi/id
20. dmidecode
21. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux 192-168-118-113 5.15.0-71-generic #78-Ubuntu SMP Tue Apr 18 09:00:29 UTC 2023 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   21:24:09 up 1 min,  0 users,  load average: 0.77, 0.34, 0.12
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3094156
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
4. sysinfo process ancestry
 /sbin/init splash
 /bin/sh -e /etc/rc.local start
 /bin/bash ./test.sh
 python3 ./run_amd_rate_aocc400_znver4_A1.py
 /bin/bash ./amd_rate_aocc400_znver4_A1.sh
 runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 --nopower
   --runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017-ZENVER4

------------------------------------------------------------
5. /proc/cpuinfo
    model name      : AMD EPYC 9654 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa101135
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 96
    siblings        : 192
    1 physical ids (chips)
    192 processors (hardware threads)
    physical id 0: core ids 0-95
    physical id 0: apicids 0-191
```

(Continued on next page)

Platform Notes (Continued)

```
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
6. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          192
  On-line CPU(s) list:             0-191
  Vendor ID:                       AuthenticAMD
  Model name:                      AMD EPYC 9654 96-Core Processor
  CPU family:                      25
  Model:                           17
  Thread(s) per core:              2
  Core(s) per socket:              96
  Socket(s):                       1
  Stepping:                        1
  Frequency boost:                 enabled
  CPU max MHz:                     3707.8120
  CPU min MHz:                     1500.0000
  BogoMIPS:                        4792.69
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                   popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                   abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                   perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                   invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                   avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                   xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                   avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
                                   lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                   pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                   umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                   avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d sme
                                   sev sev_es
  Virtualization:                  AMD-V
  L1d cache:                       3 MiB (96 instances)
  L1i cache:                       3 MiB (96 instances)
  L2 cache:                        96 MiB (96 instances)
  L3 cache:                        384 MiB (12 instances)
  NUMA node(s):                    12
  NUMA node0 CPU(s):               0-7,96-103
  NUMA node1 CPU(s):               8-15,104-111
  NUMA node2 CPU(s):               16-23,112-119
  NUMA node3 CPU(s):               24-31,120-127
  NUMA node4 CPU(s):               32-39,128-135
  NUMA node5 CPU(s):               40-47,136-143
  NUMA node6 CPU(s):               48-55,144-151
  NUMA node7 CPU(s):               56-63,152-159
  NUMA node8 CPU(s):               64-71,160-167
  NUMA node9 CPU(s):               72-79,168-175
  NUMA node10 CPU(s):              80-87,176-183
  NUMA node11 CPU(s):              88-95,184-191
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling, PBRSB-eIBRS Not affected
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       3M    8 Data            1    64        1             64
     L1i       32K       3M    8 Instruction     1    64        1             64
     L2         1M      96M    8 Unified         2  2048        1             64
     L3        32M     384M   16 Unified         3 32768        1             64

------------------------------------------------------------
7. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 12 nodes (0-11)
  node 0 cpus: 0-7,96-103
  node 0 size: 64164 MB
  node 0 free: 63713 MB
  node 1 cpus: 8-15,104-111
  node 1 size: 64506 MB
  node 1 free: 64120 MB
  node 2 cpus: 16-23,112-119
  node 2 size: 64506 MB
  node 2 free: 64085 MB
  node 3 cpus: 24-31,120-127
  node 3 size: 64506 MB
  node 3 free: 64166 MB
  node 4 cpus: 32-39,128-135
  node 4 size: 64471 MB
  node 4 free: 64151 MB
  node 5 cpus: 40-47,136-143
  node 5 size: 64506 MB
  node 5 free: 64192 MB
  node 6 cpus: 48-55,144-151
  node 6 size: 64506 MB
  node 6 free: 64156 MB
  node 7 cpus: 56-63,152-159
  node 7 size: 64506 MB
  node 7 free: 64182 MB
  node 8 cpus: 64-71,160-167
  node 8 size: 64506 MB
  node 8 free: 64150 MB
  node 9 cpus: 72-79,168-175
  node 9 size: 64506 MB
  node 9 free: 64177 MB
  node 10 cpus: 80-87,176-183
  node 10 size: 64506 MB
  node 10 free: 64180 MB
  node 11 cpus: 88-95,184-191
  node 11 size: 64455 MB
  node 11 free: 64117 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11
    0:  10  11  11  12  12  12  12  12  12  12  12  12
    1:  11  10  11  12  12  12  12  12  12  12  12  12
    2:  11  11  10  12  12  12  12  12  12  12  12  12
    3:  12  12  12  10  11  11  12  12  12  12  12  12
    4:  12  12  12  11  10  11  12  12  12  12  12  12
    5:  12  12  12  11  11  10  12  12  12  12  12  12
    6:  12  12  12  12  12  12  10  11  11  12  12  12
    7:  12  12  12  12  12  12  11  10  11  12  12  12
    8:  12  12  12  12  12  12  11  11  10  12  12  12
    9:  12  12  12  12  12  12  12  12  12  10  11  11
   10:  12  12  12  12  12  12  12  12  12  11  10  11
   11:  12  12  12  12  12  12  12  12  12  11  11  10

------------------------------------------------------------
8. /proc/meminfo
   MemTotal:       792220944 kB

'who -r' did not return a run level

------------------------------------------------------------
9. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
  Default Target  Status
  graphical       starting

------------------------------------------------------------
10. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
                   blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup cron
                   dmesg e2scrub_reap finalrd getty@ grub-common irqbalance keyboard-setup lm-sensors
                   lvm2-monitor lxd-agent multipathd networkd-dispatcher networking nfs-blkmap nfs-server
                   open-iscsi pollinate rpcbind rsyslog secureboot-db setvtrgb ssh systemd-networkd
                   systemd-networkd-wait-online systemd-pstore systemd-resolved tuned ua-reboot-cmds
                   ubuntu-advantage ufw wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup rc-local systemd-fsck-root systemd-remount-fs
  disabled         acpid console-getty debug-shell grub-initrd-fallback ifupdown-wait-online ipmievd iscsid
                   ndctl-monitor nftables nvmefc-boot-connections nvmf-autoconnect rsync serial-getty@
                   sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd thermald upower wpa_supplicant-nl80211@
                   wpa_supplicant-wired@ wpa_supplicant@
  generated        apport cpufreqd cpufrequtils loadcpufreq mst openipmi
  indirect         uuidd
  masked           cryptdisks cryptdisks-early gpu-manager hwclock lvm2 multipath-tools-boot nfs-common
                   open-vm-tools rc rcS screen-cleanup sudo udisks2 vgauth vmtoolsd x11-common

------------------------------------------------------------
11. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-71-generic
  root=UUID=8f9e5e96-8616-4e49-a1cd-677d4550f068
  ro
  pcie_aspm=off
  quiet
  splash
  amd_pstate=enable
  idle=nomwait
  cppc=enable
  vt.handoff=7
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
12. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 2.40 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2400MHz

------------------------------------------------------------
13. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.2 LTS
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
18. Disk information
SPEC is set to: /root/cpu2017-ZENVER4
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 ext4  879G   48G  786G   6% /

------------------------------------------------------------
19. /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid S44NL-1U
    Product Family: S6NL

------------------------------------------------------------
20. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x SK Hynix HMCG94MEBRA123N 64 GB 2 rank 4800


------------------------------------------------------------
21. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      3A04
   BIOS Date:         06/01/2023
   BIOS Revision:     5.27
   Firmware Revision: 3.7
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

(Continued on next page)

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc400-flags.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1_AMD_Genoa.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc400-flags.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1_AMD_Genoa.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-24 17:24:08-0400.
Report generated on 2023-08-30 09:44:30 by CPU2017 PS formatter v6716.
Originally published on 2023-08-29.