



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

SPECSpeed®2017_int_base = 14.9

SPECSpeed®2017_int_peak = 15.1

CPU2017 License: 6573


Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

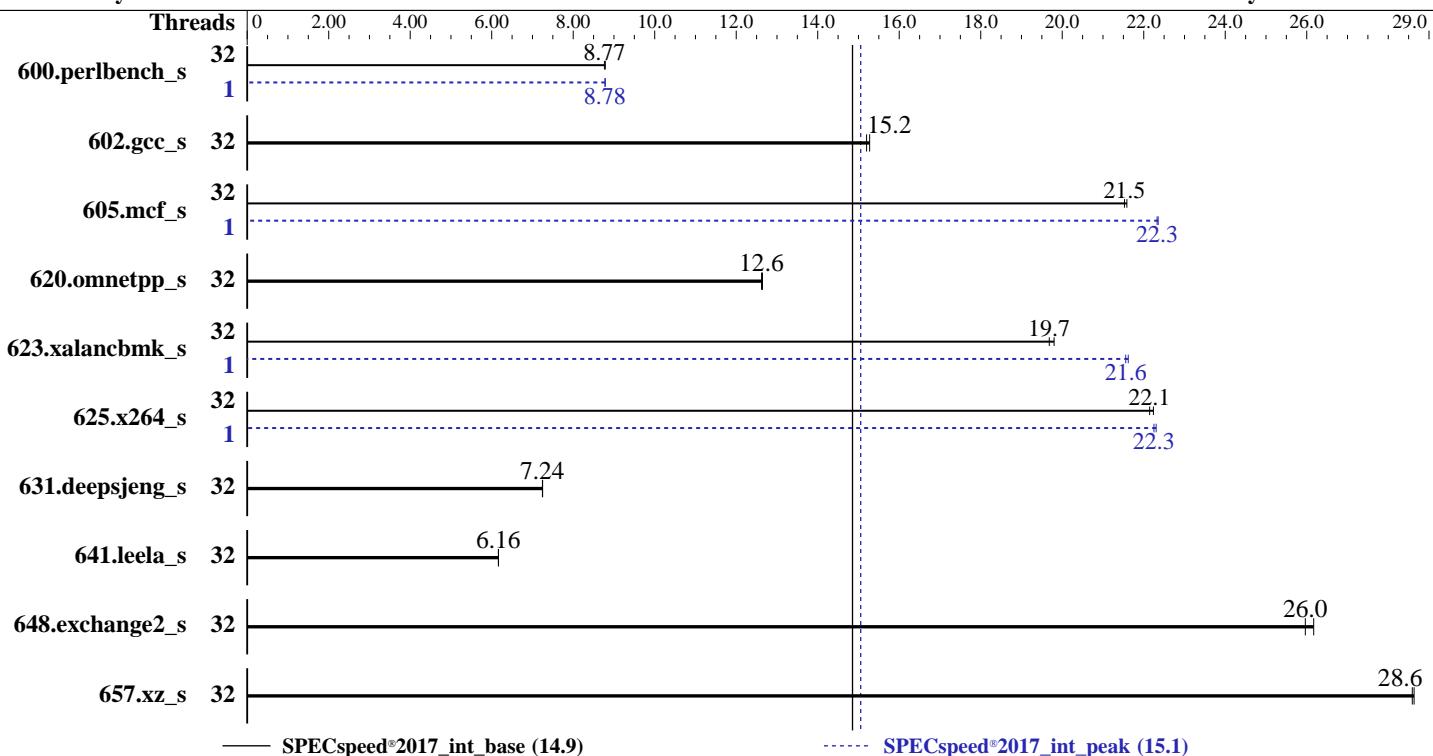

Hardware

CPU Name: AMD EPYC 9384X
 Max MHz: 3900
 Nominal: 3100
 Enabled: 32 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 768 MB I+D on chip per chip, 96 MB shared / 4 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 40 GB on tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise High Performance Computing 15 SP4
 Compiler: 5.14.21-150400.22-default
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
 Firmware: Yes
 File System: Version 1.4.2 released May-2023
 System State: tmpfs
 Base Pointers: Run level 3 (multi-user)
 Peak Pointers: 64-bit
 Other: 64-bit
 Power Management: None
 BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"  
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/amd_speed_aocc400_znver4_A_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 600.perlbench_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    DRAM Refresh Delay : Performance  
    DIMM Self Healing on  
    Uncorrectable Memory Error : Disabled  
        Logical Processor : Disabled  
    Virtualization Technology : Disabled  
        NUMA Nodes per Socket : 4  
        L3 Cache as NUMA Domain : Enabled  
  
        System Profile : Custom  
            C-States : Disabled  
        Memory Patrol Scrub : Disabled  
        PCI ASPM L1 Link  
            Power Management : Disabled  
            Determinism Slider : Power Determinism  
        Algorithm Performance  
            Boost Disable (ApbDis) : Enabled
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri May 13 14:16:50 2022
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. sysctl
 15. /sys/kernel/mm/transparent_hugepage
 16. /sys/kernel/mm/transparent_hugepage/khugepaged
 17. OS release
 18. Disk information
 19. /sys/devices/virtual/dmi/id
 20. dmidecode
 21. BIOS
-

1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux

2. w
14:16:50 up 3 min, 1 user, load average: 0.55, 0.47, 0.20
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttys1 - 14:15 31.00s 1.57s 0.30s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3094262
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```
stack size          (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 3094262
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 29  
login -- root  
-bash  
/bin/bash ./DELL_speed.sh  
/bin/bash ./dell-run-main.sh speed  
/bin/bash ./dell-run-main.sh speed  
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1  
--define DL-BIOS-adddcD=1 --define DL-BIOS-VirtD=1 --define DL-VERS=v4.6 --output_format html,pdf,txt  
python3 ./run_amd_speed_aocc400_znver4_A1.py  
/bin/bash ./amd_speed_aocc400_znver4_A1.sh  
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define  
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define  
DL-BIOS-VirtD=1 --define DL-VERS=v4.6 --output_format html,pdf,txt intspeed  
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define  
DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProcD=1 --define DL-BIOS-adddcD=1 --define  
DL-BIOS-VirtD=1 --define DL-VERS=v4.6 --output_format html,pdf,txt --nopower --runmode speed --tune  
base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1
```

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9384X 32-Core Processor  
vendor_id        : AuthenticAMD  
cpu family      : 25  
model           : 17  
stepping         : 1  
microcode        : 0xa101121  
bugs             : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size         : 3584 4K pages  
cpu cores        : 32  
siblings         : 32  
1 physical ids (chips)  
32 processors (hardware threads)  
physical id 0: core ids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115  
physical id 0: apicids 0-3,16-19,32-35,48-51,64-67,80-83,96-99,112-115  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.2:  
Architecture:          x86_64  
CPU op-mode(s):       32-bit, 64-bit  
Address sizes:        52 bits physical, 57 bits virtual  
Byte Order:           Little Endian  
CPU(s):               32  
On-line CPU(s) list:  0-31  
Vendor ID:            AuthenticAMD  
Model name:           AMD EPYC 9384X 32-Core Processor
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	32
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3911.3279
CPU min MHz:	1500.0000
BogoMIPS:	6201.62
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bml1 avx2 smep bml2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsaves xgetbv1 xsaves cq_mllc cq_moccup_llc cq_mmbm_total cq_mmbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbm umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:	AMD-V
L1d cache:	1 MiB (32 instances)
L1i cache:	1 MiB (32 instances)
L2 cache:	32 MiB (32 instances)
L3 cache:	768 MiB (8 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-7
NUMA node1 CPU(s):	8-15
NUMA node2 CPU(s):	16-23
NUMA node3 CPU(s):	24-31
Vulnerability Itlb multihit:	Not affected
Vulnerability Lltf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx sync abort:	Not affected

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d    32K     1M     8 Data          1       64        1        64
  L1i    32K     1M     8 Instruction   1       64        1        64
  L2     1M     32M     8 Unified       2     2048        1        64
  L3     96M    768M    16 Unified      3    98304        1        64
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-7

node 0 size: 193078 MB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

CPU2017 License: 6573

Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 0 free: 192385 MB
node 1 cpus: 8-15
node 1 size: 193532 MB
node 1 free: 193242 MB
node 2 cpus: 16-23
node 2 size: 193498 MB
node 2 free: 189557 MB
node 3 cpus: 24-31
node 3 size: 193478 MB
node 3 free: 193192 MB
node distances:
node 0 1 2 3
 0: 10 12 12 12
 1: 12 10 12 12
 2: 12 12 10 12
 3: 12 12 12 10

-----
9. /proc/meminfo
MemTotal: 792154656 kB

-----
10. who -r
run-level 3 May 13 14:15

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
issue-generator kbdsettings postfix purge-kernels rollback sshd wicked wickedd-auto4
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autoyaml-initscripts boot-sysctl ca-certificates chrony-wait chronyd console-getty
debug-shell grub2-once haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load
lunmask munge nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd salt-minion serial-getty@
slurmctld slurmd slurmdbd systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd ypbinder
indirect wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=32833f21-2096-4803-86a7-7316a302782e
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Platform Notes (Continued)

```
vm.dirty_bytes          0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio          8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode     1
```

```
15. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force
```

```
16. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000
```

```
17. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise High Performance Computing 15 SP4
```

```
18. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs          tmpfs  40G   3.5G  37G   9%  /mnt/ramdisk
```

```
19. /sys/devices/virtual/dmi/id
  Vendor:        Dell Inc.
  Product:       PowerEdge R6615
  Product Family: PowerEdge
  Serial:        GLM4018
```

```
20. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  12x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Platform Notes (Continued)

21. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.4.2
BIOS Date: 05/05/2023
BIOS Revision: 1.4

Compiler Version Notes

C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 648.exchange2_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

Test Date: Jul-2023

Hardware Availability: Jul-2023

Software Availability: Nov-2022

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdaloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdaloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -floop
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang

602.gcc_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.html>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.9

SPECspeed®2017_int_peak = 15.1

PowerEdge R6615 (AMD EPYC 9384X 32-Core Processor)

CPU2017 License: 6573

Test Date: Jul-2023

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-05-13 15:16:49-0400.

Report generated on 2023-09-13 14:48:47 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-13.