SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa

eterio 227 RZ2 (AMD EPYC 7413, 2.65 GHz)

SPECrate®2017_fp_base = 426

SPECrate®2017_fp_peak = 457

CPU2017 License: 9081
Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa
Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023
Hardware Availability: Mar-2021
Software Availability: Jul-2023

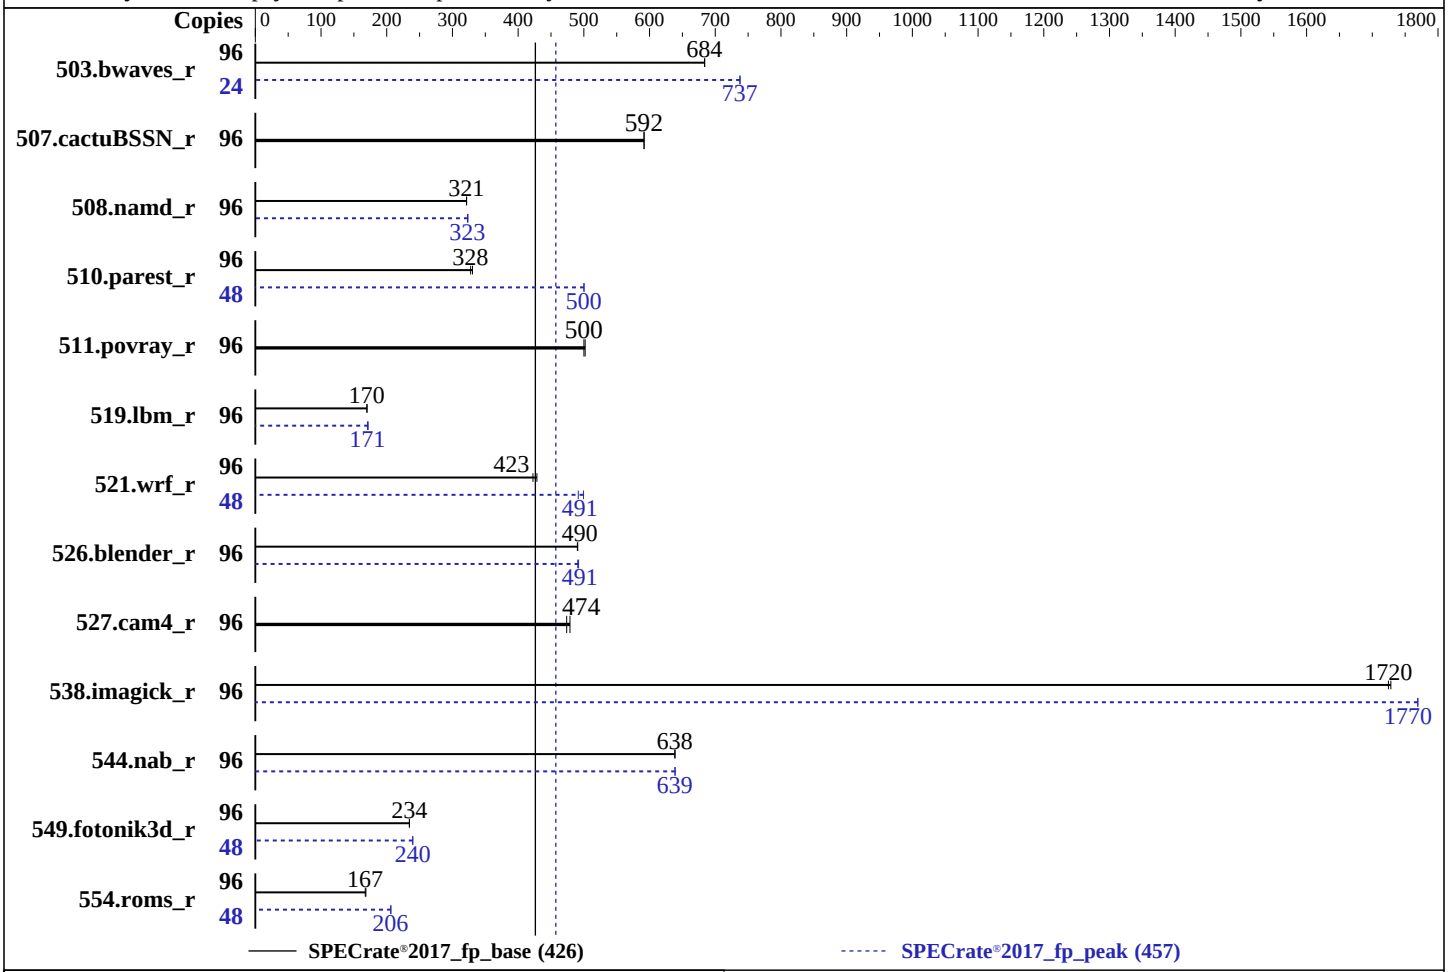

Hardware

CPU Name:	AMD EPYC 7413
Max MHz:	3600
Nominal:	2650
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 960 GB SATA III SSD
Other:	None

Software

OS:	Ubuntu 22.04.2 LTS Kernel 5.15.0-79-generic x86_64
Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Parallel:	No
Firmware:	BIOS Version 1401 released Apr-2023
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Epsylon Sp. z o.o. Sp. Komandytowa

eterio 227 RZ2 (AMD EPYC 7413, 2.65 GHz)

SPECrate®2017_fp_base = 426

SPECrate®2017_fp_peak = 457

CPU2017 License: 9081
Test Sponsor: Epsylon Sp. z o.o. Sp. Komandytowa
Tested by: Epsylon Sp. z o.o. Sp. Komandytowa

Test Date: Sep-2023
Hardware Availability: Mar-2021
Software Availability: Jul-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	**1408**	**684**	1407	684			24	**326**	**737**	326	738		
507.cactuBSSN_r	96	**205**	**592**	205	592			96	**205**	**592**	205	592		
508.namd_r	96	**284**	**321**	284	322			96	**282**	**323**	282	324		
510.parest_r	96	**766**	**328**	760	330			48	**251**	**500**	251	500		
511.povray_r	96	447	502	**448**	**500**			96	447	502	**448**	**500**		
519.lbm_r	96	595	170	**596**	**170**			96	**593**	**171**	589	172		
521.wrf_r	96	502	429	**509**	**423**			48	215	500	**219**	**491**		
526.blender_r	96	298	491	**298**	**490**			96	297	492	**298**	**491**		
527.cam4_r	96	**354**	**474**	351	479			96	**354**	**474**	351	479		
538.imagick_r	96	138	1730	**138**	**1720**			96	135	1770	**135**	**1770**		
544.nab_r	96	253	639	**253**	**638**			96	**253**	**639**	253	639		
549.fotonik3d_r	96	1595	235	**1596**	**234**			48	781	240	**781**	**240**		
554.roms_r	96	**912**	**167**	906	168			48	369	206	**370**	**206**		

SPECrate®2017_fp_base = 426

SPECrate®2017_fp_peak = 457

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
'sync; sysctl -w vm.drop_caches=3' was used to clear filesystem caches

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/cpu2017.1.1.9/amd_rate_aocc320_milanx_A_lib/lib;/cpu2017.1.1.9/amd_rate_aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 Bios settings:
 Engine Boost = Enabled
 SVM Mode = Disabled
 NUMA nodes per socket = NPS4
 ACPI SRAT L3 Cache as NUMA Domain = Enabled
 DLWM Support = Disabled
 APBDIS = 1
 Fix SOC P-state = P0


 Sysinfo program /cpu2017.1.1.9/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on sut Thu Sep 14 18:17:07 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
```

(Continued on next page)

Platform Notes (Continued)

```
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux sut 5.15.0-79-generic #86-Ubuntu SMP Mon Jul 10 16:07:21 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:17:07 up  4:18,  4 users,  load average: 57.82, 85.47, 90.83
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  test     tty1     -                14:05    4:11m  0.72s  0.00s -bash
  test     pts/0    -                14:05    4:06m  1.30s  0.70s sudo -s
  test     tty2     -                14:09    4:07m  0.05s  0.00s -bash
  test     pts/1    -                14:09    4:05m  0.00s  0.03s sudo -s

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       test

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              2062752
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 sudo -s
 sudo -s
```

(Continued on next page)

Platform Notes (Continued)

```
 /bin/bash
 python3 ./run_amd_rate_aocc320_milanx_A1.py
 /bin/bash ./amd_rate_aocc320_milanx_A1.sh
 runcpu --config amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 fprate
 runcpu --configfile amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /cpu2017.1.1.9

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 7413 24-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 1
    stepping        : 1
    microcode       : 0xa0011a9
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 2560 4K pages
    cpu cores       : 24
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-5,8-13,16-21,24-29
    physical id 1: core ids 0-5,8-13,16-21,24-29
    physical id 0: apicids 0-11,16-27,32-43,48-59
    physical id 1: apicids 64-75,80-91,96-107,112-123
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   48 bits physical, 48 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          96
  On-line CPU(s) list:             0-95
  Vendor ID:                       AuthenticAMD
  Model name:                      AMD EPYC 7413 24-Core Processor
  CPU family:                      25
  Model:                           1
  Thread(s) per core:              2
  Core(s) per socket:              24
  Socket(s):                       2
  Stepping:                        1
  Frequency boost:                 enabled
  CPU max MHz:                     3630.8101
  CPU min MHz:                     1500.0000
  BogoMIPS:                        5290.12
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                                   xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                                   misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                                   perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single
```

(Continued on next page)

Platform Notes (Continued)

```
                        hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock
                        nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                        pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes
                        vpclmulqdq rdpid overflow_recov succor smca fsrm
  Virtualization:       AMD-V
  L1d cache:            1.5 MiB (48 instances)
  L1i cache:            1.5 MiB (48 instances)
  L2 cache:             24 MiB (48 instances)
  L3 cache:             256 MiB (8 instances)
  NUMA node(s):         8
  NUMA node0 CPU(s):    0-5,48-53
  NUMA node1 CPU(s):    6-11,54-59
  NUMA node2 CPU(s):    12-17,60-65
  NUMA node3 CPU(s):    18-23,66-71
  NUMA node4 CPU(s):    24-29,72-77
  NUMA node5 CPU(s):    30-35,78-83
  NUMA node6 CPU(s):    36-41,84-89
  NUMA node7 CPU(s):    42-47,90-95
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling, PBRSB-eIBRS Not affected
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K     1.5M    8 Data            1    64        1             64
     L1i       32K     1.5M    8 Instruction     1    64        1             64
     L2       512K      24M    8 Unified         2  1024        1             64
     L3        32M     256M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-5,48-53
  node 0 size: 64308 MB
  node 0 free: 63715 MB
  node 1 cpus: 6-11,54-59
  node 1 size: 64508 MB
  node 1 free: 63905 MB
  node 2 cpus: 12-17,60-65
  node 2 size: 64461 MB
  node 2 free: 63463 MB
  node 3 cpus: 18-23,66-71
  node 3 size: 64496 MB
  node 3 free: 63860 MB
  node 4 cpus: 24-29,72-77
  node 4 size: 64508 MB
  node 4 free: 63975 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 5 cpus: 30-35,78-83
  node 5 size: 64508 MB
  node 5 free: 63961 MB
  node 6 cpus: 36-41,84-89
  node 6 size: 64508 MB
  node 6 free: 63973 MB
  node 7 cpus: 42-47,90-95
  node 7 size: 64502 MB
  node 7 free: 63979 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       528181556 kB

------------------------------------------------------------
10. who -r
  run-level 5 Sep 14 14:00

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
  * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online apparmor
                   blk-availability cloud-config cloud-final cloud-init cloud-init-local console-setup
                   e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback keyboard-setup
                   lvm2-monitor multipathd networkd-dispatcher open-iscsi pollinate secureboot-db setvtrgb
                   snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                   systemd-timesyncd thermald unattended-upgrades wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell ipmievd iscsid serial-getty@ systemd-boot-check-no-failures
                   systemd-network-generator systemd-sysext systemd-time-wait-sync upower
                   wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
  generated        apport cpufrequtils loadcpufreq openipmi
  masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot numad rc rcS screen-cleanup
                   sudo tuned x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-79-generic
  root=UUID=ca6cbc2c-44a5-484e-a5b4-38016e430e94
  ro
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. cpupower frequency-info
  CPU scaling: performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.2 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /cpu2017.1.1.9
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  879G   44G  790G   6% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Epsylon
    Product:        eterio 227 RZ2 90SF01G5-M01620
    Product Family: Server
```

(Continued on next page)

Platform Notes (Continued)

```
     Serial:         02300666

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M393A4K40EB3-CWE 32 GB 2 rank 3200
     16x Unknown Unknown


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      1401
    BIOS Date:         04/26/2023
    BIOS Revision:     14.1
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization -mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist`

(Continued on next page)

Peak Optimization Flags (Continued)

519.lbm_r (continued):
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

538.imagick_r: Same as 519.lbm_r

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

C++ benchmarks:

508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc

510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc

Fortran benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang

554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Mrecursive -lamdlibm
-ljemalloc -lflang

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `basepeak = yes`

526.blender_r: `-m64 -std=c++98 -mno-adx -mno-sse4a`
`-Wl,-mllvm -Wl,-x86-use-vzeroupper=false`
`-Wl,-mllvm -Wl,-enable-licm-vrp -flto`
`-Wl,-mllvm -Wl,-function-specialize`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`
`-march=znver3 -fveclib=AMDLIBM -ffast-math`
`-fstruct-layout=7 -mllvm -unroll-threshold=50`
`-fremap-arrays -flv-function-specialization`
`-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist`
`-mllvm -global-vectorize-slp=true`
`-mllvm -function-specialize -mllvm -enable-licm-vrp`
`-mllvm -reduce-array-computations=3 -finline-aggressive`
`-mllvm -unroll-threshold=100 -mllvm -reroll-loops`
`-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc`

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

(Continued on next page)

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html`
`http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevD-OCT-2023-For-AMD-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/Epsylon-Platform-Flags-RevD-OCT-2023-For-AMD-Platform.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-14 14:17:07-0400.
Report generated on 2023-10-11 12:33:41 by CPU2017 PS formatter v6716.
Originally published on 2023-10-10.