SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

(Tyrone Camarero SDA200A2N-212)
(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_fp_base = 324

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2023
Hardware Availability: Jun-2023
Software Availability: Sep-2023

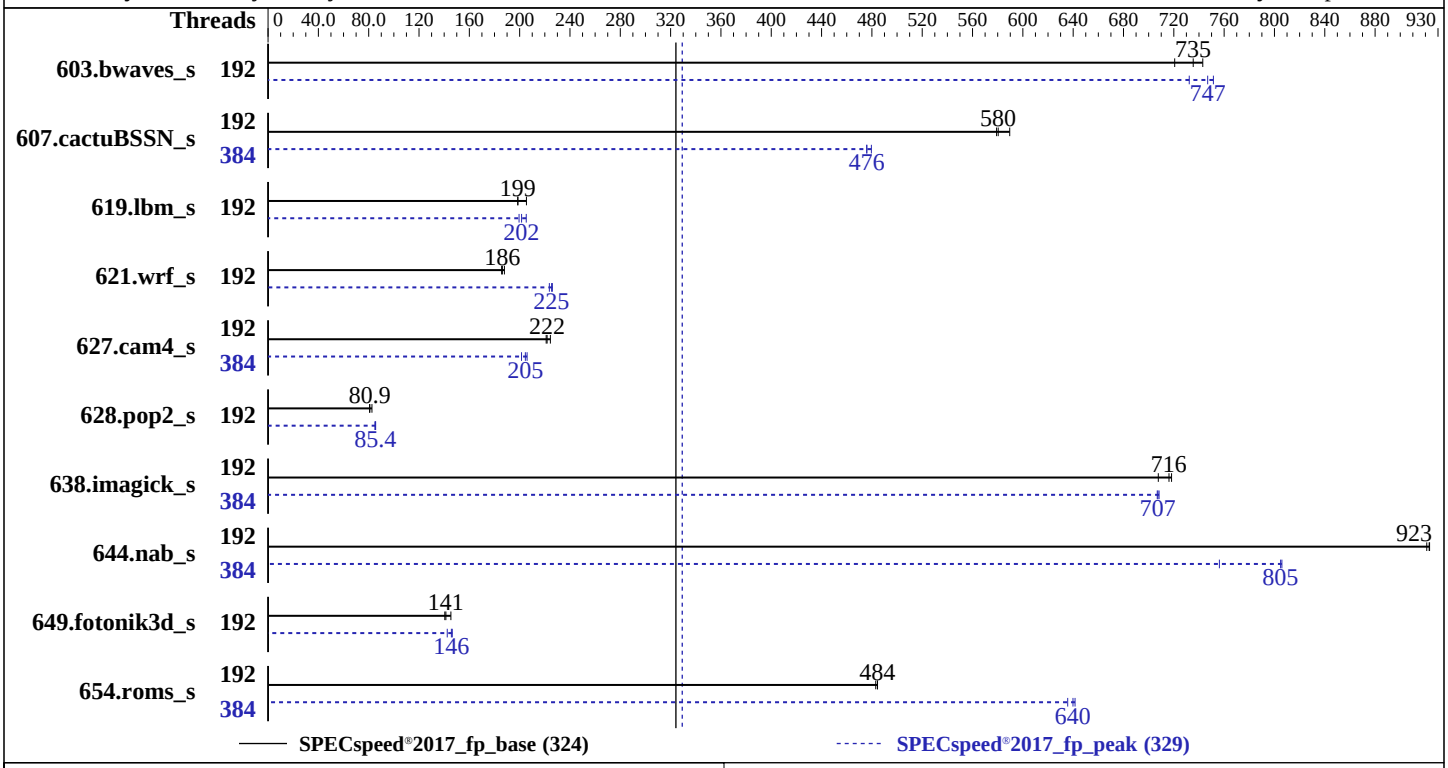

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1472 GB (23 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB NVMe
Other:	None

Software

OS:	Ubuntu 20.04.4 LTS kernel version 5.15.0-84-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.4 released Apr-2023
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	none
Power Management:	OS is set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-212)
(2.4 GHz, AMD EPYC 9654)

SPECspeed®2017_fp_base = 324

SPECspeed®2017_fp_peak = 329

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Sep-2023
Hardware Availability: Jun-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	192	79.4	743	81.9	721	**80.2**	**735**	192	80.6	732	**79.0**	**747**	78.5	751
607.cactuBSSN_s	192	28.8	579	**28.7**	**580**	28.3	590	384	**35.0**	**476**	35.0	476	34.8	480
619.lbm_s	192	26.4	198	**26.4**	**199**	25.5	205	192	26.3	200	25.5	205	**26.0**	**202**
621.wrf_s	192	**71.0**	**186**	71.2	186	70.4	188	192	58.5	226	59.1	224	**58.7**	**225**
627.cam4_s	192	40.1	221	**40.0**	**222**	39.5	224	384	**43.3**	**205**	43.0	206	44.0	201
628.pop2_s	192	**147**	**80.9**	144	82.6	147	80.7	192	139	85.5	140	84.9	**139**	**85.4**
638.imagick_s	192	20.1	718	**20.1**	**716**	20.4	708	384	20.4	708	**20.4**	**707**	20.4	707
644.nab_s	192	18.9	923	**18.9**	**923**	19.0	921	384	21.7	806	23.1	756	**21.7**	**805**
649.fotonik3d_s	192	64.9	141	62.7	145	**64.5**	**141**	192	**62.6**	**146**	62.3	146	64.0	142
654.roms_s	192	**32.5**	**484**	32.5	484	32.6	483	384	**24.6**	**640**	24.5	641	24.8	636

SPECspeed®2017_fp_base = 324

SPECspeed®2017_fp_peak = 329

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-383"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "384"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-383"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-383"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-191"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-383"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-383"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-191"
PGHPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 192 1 193 2 194 3 195 4 196 5 197 6 198 7 199 8 200 9 201 10 202 11 203 12 204 13
     205 14 206 15 207 16 208 17 209 18 210 19 211 20 212 21 213 22 214 23 215 24 216 25 217 26 218 27 219
     28 220 29 221 30 222 31 223 32 224 33 225 34 226 35 227 36 228 37 229 38 230 39 231 40 232 41 233 42
     234 43 235 44 236 45 237 46 238 47 239 48 240 49 241 50 242 51 243 52 244 53 245 54 246 55 247 56 248
     57 249 58 250 59 251 60 252 61 253 62 254 63 255 64 256 65 257 66 258 67 259 68 260 69 261 70 262 71
     263 72 264 73 265 74 266 75 267 76 268 77 269 78 270 79 271 80 272 81 273 82 274 83 275 84 276 85 277
     86 278 87 279 88 280 89 281 90 282 91 283 92 284 93 285 94 286 95 287 96 288 97 289 98 290 99 291 100
     292 101 293 102 294 103 295 104 296 105 297 106 298 107 299 108 300 109 301 110 302 111 303 112 304
     113 305 114 306 115 307 116 308 117 309 118 310 119 311 120 312 121 313 122 314 123 315 124 316 125
     317 126 318 127 319 128 320 129 321 130 322 131 323 132 324 133 325 134 326 135 327 136 328 137 329
     138 330 139 331 140 332 141 333 142 334 143 335 144 336 145 337 146 338 147 339 148 340 149 341 150
     342 151 343 152 344 153 345 154 346 155 347 156 348 157 349 158 350 159 351 160 352 161 353 162 354
     163 355 164 356 165 357 166 358 167 359 168 360 169 361 170 362 171 363 172 364 173 365 174 366 175
     367 176 368 177 369 178 370 179 371 180 372 181 373 182 374 183 375 184 376 185 377 186 378 187 379
     188 380 189 381 190 382 191 383"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Settings:
cTDP: 360
Determinism Slider set to Power
Package Power: 360
EDC: 400
ACPI SRAT L3 Cache as NUMA Domain: enabled
Memory interleaving: Disabled
4-link xGMI max speed: 16Gbps
Fan Speed: Maximum

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on amd2-Super-Server Fri Sep 29 13:25:21 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux amd2-Super-Server 5.15.0-84-generic #93~20.04.1-Ubuntu SMP Wed Sep 6 16:15:40 UTC 2023 x86_64 x86_64
   x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
2. w
   13:25:21 up 1 day, 20:33,  2 users,  load average: 5.97, 5.22, 3.24
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  amd2     tty2     -                Wed16    3:23m  1.87s  0.05s -bash
  amd2     tty3     -                Thu18   18:28m  0.05s  0.03s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       amd2

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              5932677
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init splash
 /bin/login -p --
 -bash
 sudo su
 su
 bash
 python3 ./run_amd_speed_aocc400_znver4_A1.py
 /bin/bash ./amd_speed_aocc400_znver4_A1.sh
 runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9654 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa10113e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 96
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-95
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 1: core ids 0-95
    physical id 0: apicids 0-191
    physical id 1: apicids 256-447
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.34:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Byte Order:                      Little Endian
  Address sizes:                   52 bits physical, 57 bits virtual
  CPU(s):                          384
  On-line CPU(s) list:             0-383
  Thread(s) per core:              2
  Core(s) per socket:              96
  Socket(s):                       2
  NUMA node(s):                    2
  Vendor ID:                       AuthenticAMD
  CPU family:                      25
  Model:                           17
  Model name:                      AMD EPYC 9654 96-Core Processor
  Stepping:                        1
  Frequency boost:                 enabled
  CPU MHz:                         1500.000
  CPU max MHz:                     3707.8120
  CPU min MHz:                     1500.0000
  BogoMIPS:                        4799.74
  Virtualization:                  AMD-V
  L1d cache:                       6 MiB
  L1i cache:                       6 MiB
  L2 cache:                        192 MiB
  L3 cache:                        768 MiB
  NUMA node0 CPU(s):               0-95,192-287
  NUMA node1 CPU(s):               96-191,288-383
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling, PBRSB-eIBRS Not affected
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                   lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                   rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                                   movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                   cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                   topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                   cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                   fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                   rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
```

(Continued on next page)

Platform Notes (Continued)

```
      avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
      cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
      wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
      v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
      gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
      rdpid overflow_recov succor smca fsrm flush_l1d

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL
     L1d       32K       6M    8 Data            1
     L1i       32K       6M    8 Instruction     1
     L2         1M     192M    8 Unified         2
     L3        32M     768M   16 Unified         3

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-95,192-287
  node 0 size: 709209 MB
  node 0 free: 705303 MB
  node 1 cpus: 96-191,288-383
  node 1 size: 774035 MB
  node 1 free: 769441 MB
  node distances:
  node   0   1
    0:  10  32
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1518842524 kB

------------------------------------------------------------
10. who -r
  run-level 5 Sep 26 16:41

------------------------------------------------------------
11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                  LOAD   ACTIVE SUB    DESCRIPTION
  * fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups
                   cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
                   irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn
                   pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog
                   systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw
                   unattended-upgrades whoopsie wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         acpid brltty console-getty debug-shell openvpn-client@ openvpn-server@ openvpn@
```

(Continued on next page)

Platform Notes (Continued)

```
                  rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd
                  systemd-boot-check-no-failures systemd-network-generator systemd-networkd
                  systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@
                  wpa_supplicant-wired@ wpa_supplicant@
  generated       apport
  indirect        display-manager lightdm saned@ spice-vdagent spice-vdagentd uuidd
  masked          alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
                  sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-84-generic
  root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57
  ro
  quiet
  splash
  vt.handoff=7

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
```

(Continued on next page)

Platform Notes (Continued)

```
  os-release Ubuntu 20.04.4 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme1n1p2 ext4  938G   19G  872G   3% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Tyrone Systems
    Product:        Tyrone Camarero SDA200A2N-212
    Product Family: SMC H13
    Serial:         A509935X3906531

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    1x NO DIMM NO DIMM
    23x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      1.4
   BIOS Date:         04/19/2023
   BIOS Revision:     5.27
```

Compiler Version Notes

```
==============================================================================================================
C              | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

644.nab_s: `-DSPEC_LP64`
649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:
```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
```

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
`-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

Base Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

638.imagick_s: `Same as 619.lbm_s`

644.nab_s: `-m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

Fortran benchmarks:

603.bwaves_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive -mllvm -reduce-array-computations=3 -fvector-transform -fscalar-transform -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

649.fotonik3d_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive -mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

654.roms_s: `Same as 603.bwaves_s`

Benchmarks using both Fortran and C:

621.wrf_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast`

(Continued on next page)

Peak Optimization Flags (Continued)

621.wrf_s (continued):
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-return-type -Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`
`http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-09-29 03:55:20-0400.
Report generated on 2023-10-25 10:34:17 by CPU2017 PS formatter v6716.
Originally published on 2023-10-24.