# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

## NF5688M7 (Intel Xeon Platinum 8468)

SPECspeed®2017_fp_base = 322

SPECspeed®2017_fp_peak = 322

**CPU2017 License:** 3358
**Test Sponsor:** IEIT Systems Co., Ltd.
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Sep-2023
**Hardware Availability:** Apr-2023
**Software Availability:** Dec-2022

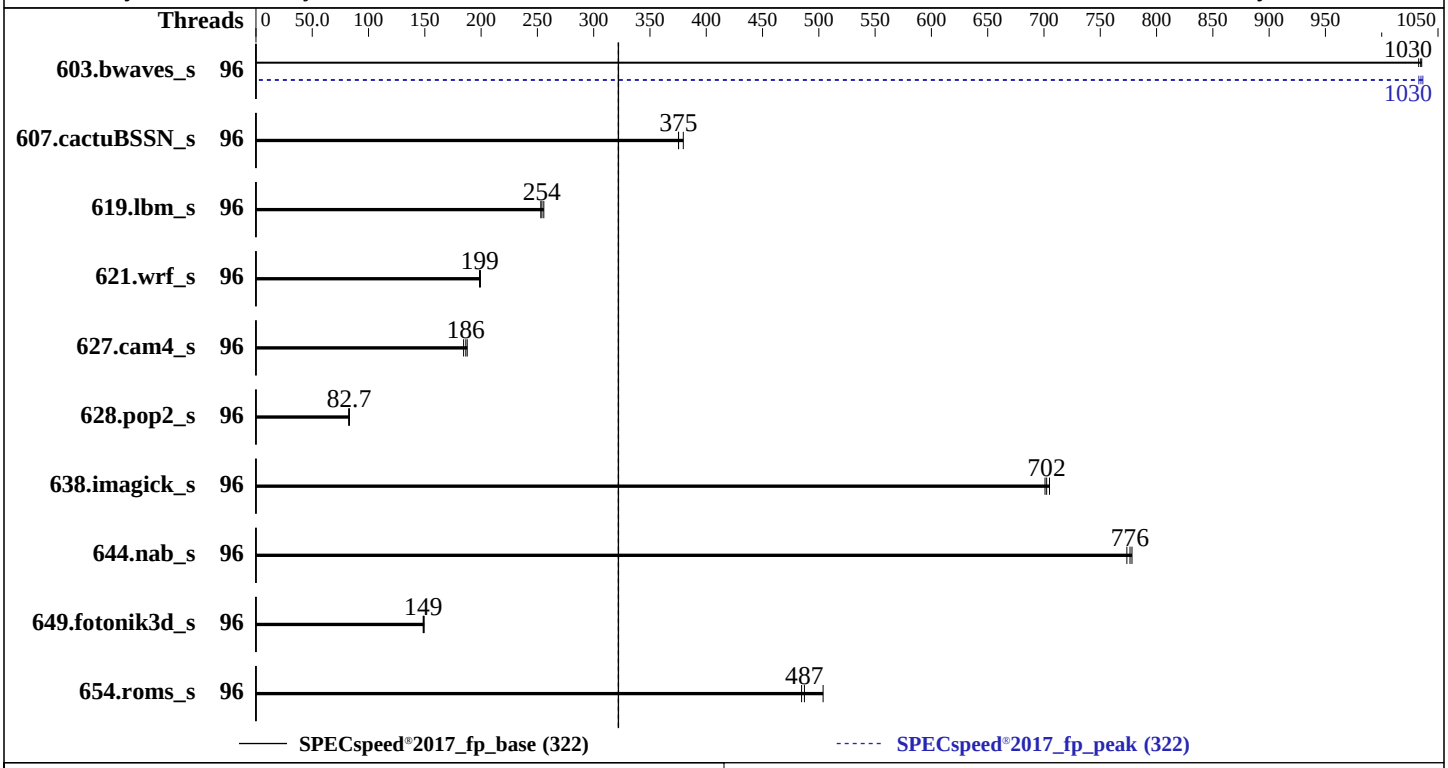


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8468 |
| Max MHz: | 3800 |
| Nominal: | 2100 |
| Enabled: | 24 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 105 MB I+D on chip per chip |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx4 PC5-4800B-R) |
| Storage: | 1 x 1 TB NVME SSD |
| Other: | None |

## Software

| | |
|---|---|
| OS: | Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.22.1.el9_0.x86_64 |
| Compiler: | C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux; |
| Parallel: | Yes |
| Firmware: | Version 04.02.00 released Feb-2023 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

## NF5688M7 (Intel Xeon Platinum 8468)

SPECspeed®2017_fp_base = 322

SPECspeed®2017_fp_peak = 322

**CPU2017 License:** 3358
**Test Sponsor:** IEIT Systems Co., Ltd.
**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Sep-2023
**Hardware Availability:** Apr-2023
**Software Availability:** Dec-2022

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 96 | 57.0 | 1040 | **57.0** | **1030** | 57.1 | 1030 | 96 | 56.9 | 1040 | 57.1 | 1030 | **57.0** | **1030** |
| 607.cactuBSSN_s | 96 | **44.4** | **375** | 44.4 | 375 | 43.9 | 380 | 96 | **44.4** | **375** | 44.4 | 375 | 43.9 | 380 |
| 619.lbm_s | 96 | **20.6** | **254** | 20.7 | 253 | 20.5 | 256 | 96 | **20.6** | **254** | 20.7 | 253 | 20.5 | 256 |
| 621.wrf_s | 96 | 66.6 | 199 | **66.5** | **199** | 66.3 | 199 | 96 | 66.6 | 199 | **66.5** | **199** | 66.3 | 199 |
| 627.cam4_s | 96 | **47.5** | **186** | 48.0 | 184 | 47.2 | 188 | 96 | **47.5** | **186** | 48.0 | 184 | 47.2 | 188 |
| 628.pop2_s | 96 | 143 | 83.0 | 144 | 82.4 | **143** | **82.7** | 96 | 143 | 83.0 | 144 | 82.4 | **143** | **82.7** |
| 638.imagick_s | 96 | **20.5** | **702** | 20.5 | 705 | 20.6 | 701 | 96 | **20.5** | **702** | 20.5 | 705 | 20.6 | 701 |
| 644.nab_s | 96 | **22.5** | **776** | 22.6 | 774 | 22.5 | 778 | 96 | **22.5** | **776** | 22.6 | 774 | 22.5 | 778 |
| 649.fotonik3d_s | 96 | 61.3 | 149 | **61.3** | **149** | 61.0 | 149 | 96 | 61.3 | 149 | **61.3** | **149** | 61.0 | 149 |
| 654.roms_s | 96 | **32.3** | **487** | 32.5 | 485 | 31.3 | 504 | 96 | **32.3** | **487** | 32.5 | 485 | 31.3 | 504 |

**SPECspeed®2017_fp_base =** **322**

**SPECspeed®2017_fp_peak =** **322**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
Sub NUMA Cluster (SNC) set to disable
Hyper Threading set to disable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Sep 19 14:00:47 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   14:00:47 up 1 min,  1 user,  load average: 0.10, 0.05, 0.01
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      14:00    7.00s  0.96s  0.00s sh
  reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 2062220
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 2062220
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 28
 login -- root
 -bash
 sh reportable-ic2023.0-lin-sapphirerapids-speed-smt-off-20221201.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=96 --tune base,peak -o all --define
   drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=96 --tune base,peak --output_format all
   --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.008/templogs/preenv.fpspeed.008.0.log --lognum 008.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8468
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 6
    microcode       : 0x2b000130
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 48
    siblings        : 48
    2 physical ids (chips)
    96 processors (hardware threads)
    physical id 0: core ids 0-47
    physical id 1: core ids 0-47
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94
    physical id 1: apicids
    128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
    80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu
```

(Continued on next page)

## Platform Notes (Continued)

```
From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          96
  On-line CPU(s) list:             0-95
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      Intel(R) Xeon(R) Platinum 8468
  BIOS Model name:                 Intel(R) Xeon(R) Platinum 8468
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              1
  Core(s) per socket:              48
  Socket(s):                       2
  Stepping:                        6
  Frequency boost:                 enabled
  CPU max MHz:                     2101.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4200.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                   tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                   rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
                                   avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                   cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                                   wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
                                   avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                   avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                   enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                   amx_tile flush_l1d arch_capabilities
  L1d cache:                       4.5 MiB (96 instances)
  L1i cache:                       3 MiB (96 instances)
  L2 cache:                        192 MiB (96 instances)
  L3 cache:                        210 MiB (2 instances)
  NUMA node(s):                    4
  NUMA node0 CPU(s):               0-23
  NUMA node1 CPU(s):               24-47
  NUMA node2 CPU(s):               48-71
  NUMA node3 CPU(s):               72-95
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
```

(Continued on next page)

## Platform Notes (Continued)

```
     L1d       48K     4.5M   12 Data            1     64        1             64
     L1i       32K       3M    8 Instruction     1     64        1             64
     L2         2M     192M   16 Unified         2   2048        1             64
     L3       105M     210M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-23
  node 0 size: 128585 MB
  node 0 free: 128076 MB
  node 1 cpus: 24-47
  node 1 size: 129018 MB
  node 1 free: 128705 MB
  node 2 cpus: 48-71
  node 2 size: 129018 MB
  node 2 free: 128708 MB
  node 3 cpus: 72-95
  node 3 size: 128971 MB
  node 3 free: 128403 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527969384 kB

------------------------------------------------------------
10. who -r
  run-level 3 Sep 19 13:59

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          dbus-broker getty@ tuned udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
                   blk-availability canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
                   debug-shell firewalld irqbalance kdump kvm_stat lvm2-monitor man-db-restart-cache-update
                   mdmonitor microcode nftables nis-domainname rdisc rhsm rhsm-facts rhsmcertd rpmdb-rebuild
                   rsyslog selinux-autorelabel-mark sep5 serial-getty@ sshd sshd-keygen@ sssd
                   systemd-boot-check-no-failures systemd-network-generator systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
```

(Continued on next page)

## Platform Notes (Continued)

```
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 2.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: hpc-compute

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio           3
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     10
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
```

(Continued on next page)

## Platform Notes (Continued)

```
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/CPU2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G  209G  611G  26% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         IEI
    Product:        NF5688M7
    Product Family: Not specified
    Serial:         000000000

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R4GA3BB6-CQKVG 32 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      04.02.00
   BIOS Date:         02/23/2023
```

## Compiler Version Notes

```
==============================================================================================================
C              | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran        | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```


**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------
==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

**(Continued on next page)**

## Base Optimization Flags (Continued)

C benchmarks (continued):
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

## Peak Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

# Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

Fortran benchmarks:

603.bwaves_s: `-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `basepeak = yes`

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-intel-V3.3.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2023-09-19 14:00:47-0400.
Report generated on 2023-10-25 10:35:27 by CPU2017 PS formatter v6716.
Originally published on 2023-10-24.